

HOSTAFORM® XGC25 EF XAP®2

HOSTAFORM®

High strength glass coupled, easy flow

Hostaform® XGC25 EF XAP®2 is an easy flowing injection molding grade with approximately 25% glass fibers and reduced emission.

Emissions according to VDA 275 < 5ppm [mg/kg]

Product information

Resin Identification	POM-GF25	ISO 1043
Part Marking Code	>POM-GF25<	ISO 11469

Rheological properties

Melt volume-flow rate	5 cm ³ /10min	ISO 1133
Temperature	190 °C	
Load	2.16 kg	
Moulding shrinkage, parallel	0.5 %	ISO 294-4, 2577
Moulding shrinkage, normal	1.1 %	ISO 294-4, 2577

Typical mechanical properties

Tensile modulus	9000 MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	155 MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	3 %	ISO 527-1/-2
Charpy impact strength, 23°C	65 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	11 kJ/m ²	ISO 179/1eA
Poisson's ratio	0.34 ^[C]	

[C]: Calculated

Thermal properties

Melting temperature, 10°C/min	166 °C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	160 °C	ISO 75-1/-2

Physical/Other properties

Density	1580 kg/m ³	ISO 1183
---------	------------------------	----------

Injection

Drying Recommended	no
Drying Temperature	100 °C
Drying Time, Dehumidified Dryer	3 - 4 h
Processing Moisture Content	≤0.2 %
Melt Temperature Optimum	200 °C
Min. melt temperature	190 °C
Max. melt temperature	210 °C
Screw tangential speed	≤0.3 m/s
Mold Temperature Optimum	100 °C
Min. mould temperature	80 °C
Max. mould temperature	120 °C
Hold pressure range	60 - 120 MPa
Back pressure	2 MPa
Ejection temperature	135 °C


HOSTAFORM® XGC25 EF XAP®2

HOSTAFORM®

Characteristics

Processing	Injection Moulding
Special characteristics	High Flow, Low emissions

Stress-strain

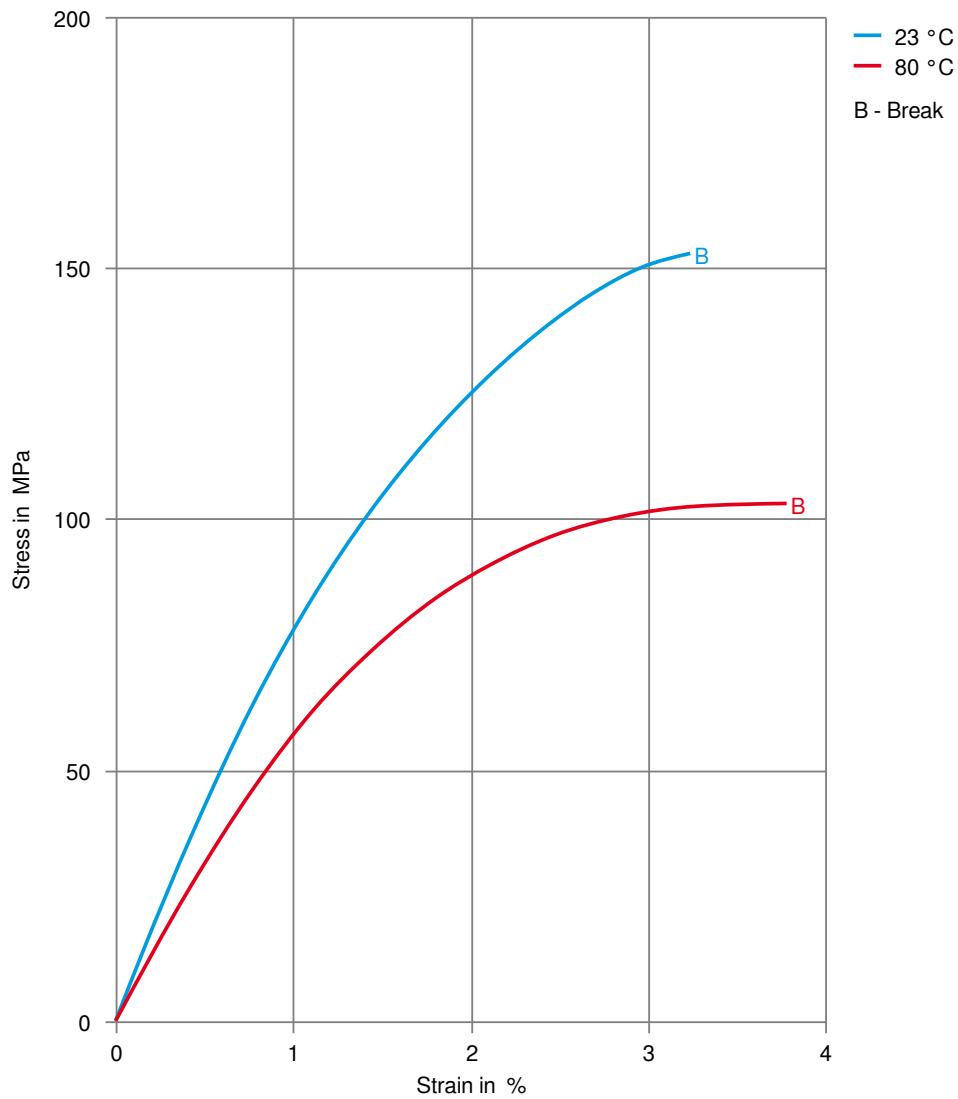

HOSTAFORM® XGC25 EF XAP®2

HOSTAFORM®

Secant modulus-strain

