

HOSTAFORM® XT 20

HOSTAFORM®

Hostaform® acetal copolymer grade XT 20 is a highly impact modified grade for demanding applications. Hostaform® XT 20 provides exceptional impact strength and flexibility over standard impact modified acetal copolymer grades. Chemical abbreviation according to ISO 1043-1: POM-HI

Product information

Resin Identification	POM	ISO 1043
Part Marking Code	>POM<	ISO 11469

Rheological properties

Melt volume-flow rate	1 cm ³ /10min	ISO 1133
Temperature	190 °C	
Load	2.16 kg	
Moulding shrinkage, parallel	1.4 %	ISO 294-4, 2577
Moulding shrinkage, normal	1.2 %	ISO 294-4, 2577

Typical mechanical properties

Tensile modulus	1200 MPa	ISO 527-1/-2
Tensile stress at yield, 50mm/min	35 MPa	ISO 527-1/-2
Tensile strain at yield, 50mm/min	25 %	ISO 527-1/-2
Flexural modulus	1100 MPa	ISO 178
Flexural stress at 3.5%	31 MPa	ISO 178
Charpy impact strength, 23 °C	N kJ/m ²	ISO 179/1eU
Charpy impact strength, -30 °C	N kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23 °C	100 kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30 °C	15 kJ/m ²	ISO 179/1eA
Izod notched impact strength, 23 °C	85 kJ/m ²	ISO 180/1A
Izod notched impact strength, -40 °C	14.0 kJ/m ²	ISO 180/1A
Hardness, Rockwell, M-scale	39	ISO 2039-2
Poisson's ratio	0.498	

Thermal properties

Melting temperature, 10 °C/min	165 °C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	64 °C	ISO 75-1/-2
Temperature of deflection under load, 0.45 MPa	124 °C	ISO 75-1/-2
Coefficient of linear thermal expansion (CLTE), parallel	120 E-6/K	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), normal	120 E-6/K	ISO 11359-1/-2

Physical/Other properties

Humidity absorption, 2mm	0.25 %	Sim. to ISO 62
Water absorption, 2mm	0.8 %	Sim. to ISO 62
Density	1330 kg/m ³	ISO 1183

HOSTAFORM® XT 20

HOSTAFORM®

Injection

Drying Recommended	no
Drying Temperature	100 °C
Drying Time, Dehumidified Dryer	3 - 4 h
Processing Moisture Content	≤0.2 %
Melt Temperature Optimum	195 °C
Min. melt temperature	180 °C
Max. melt temperature	210 °C
Screw tangential speed	≤0.3 m/s
Mold Temperature Optimum	70 °C
Min. mould temperature	60 °C
Max. mould temperature	80 °C
Hold pressure range	60 - 120 MPa
Back pressure	2 MPa
Ejection temperature	126 °C

Characteristics

Processing	Injection Moulding, Extrusion, Blow Moulding
Delivery form	Pellets
Additives	Release agent
Special characteristics	High impact or impact modified

Additional information

Processing Notes


Pre-Drying

Drying is suggested specially if material has come in contact with moisture through storage, handling or regrind use. Dry to prevent splay and odor problems.

HOSTAFORM® XT 20

HOSTAFORM®


Stress-strain

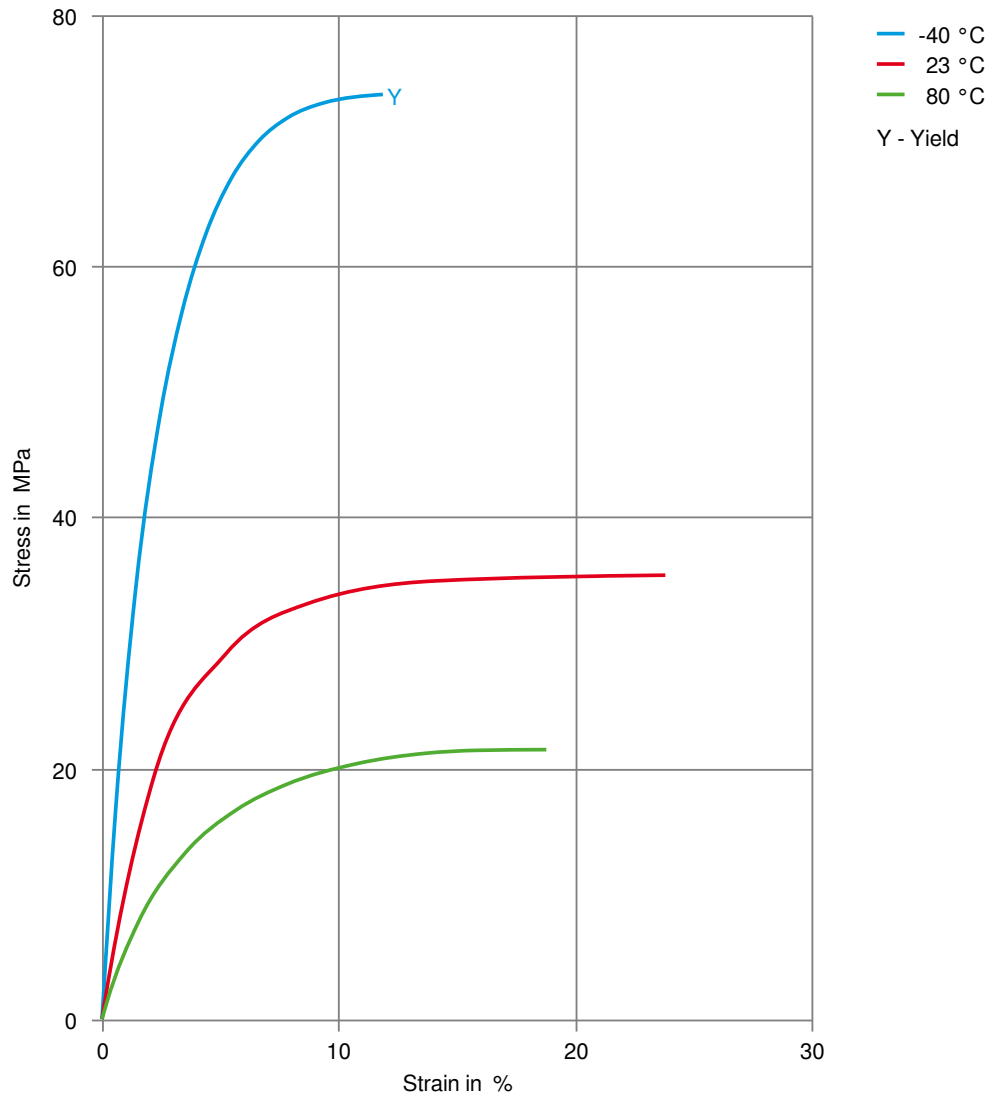

HOSTAFORM® XT 20

HOSTAFORM®


Secant modulus-strain

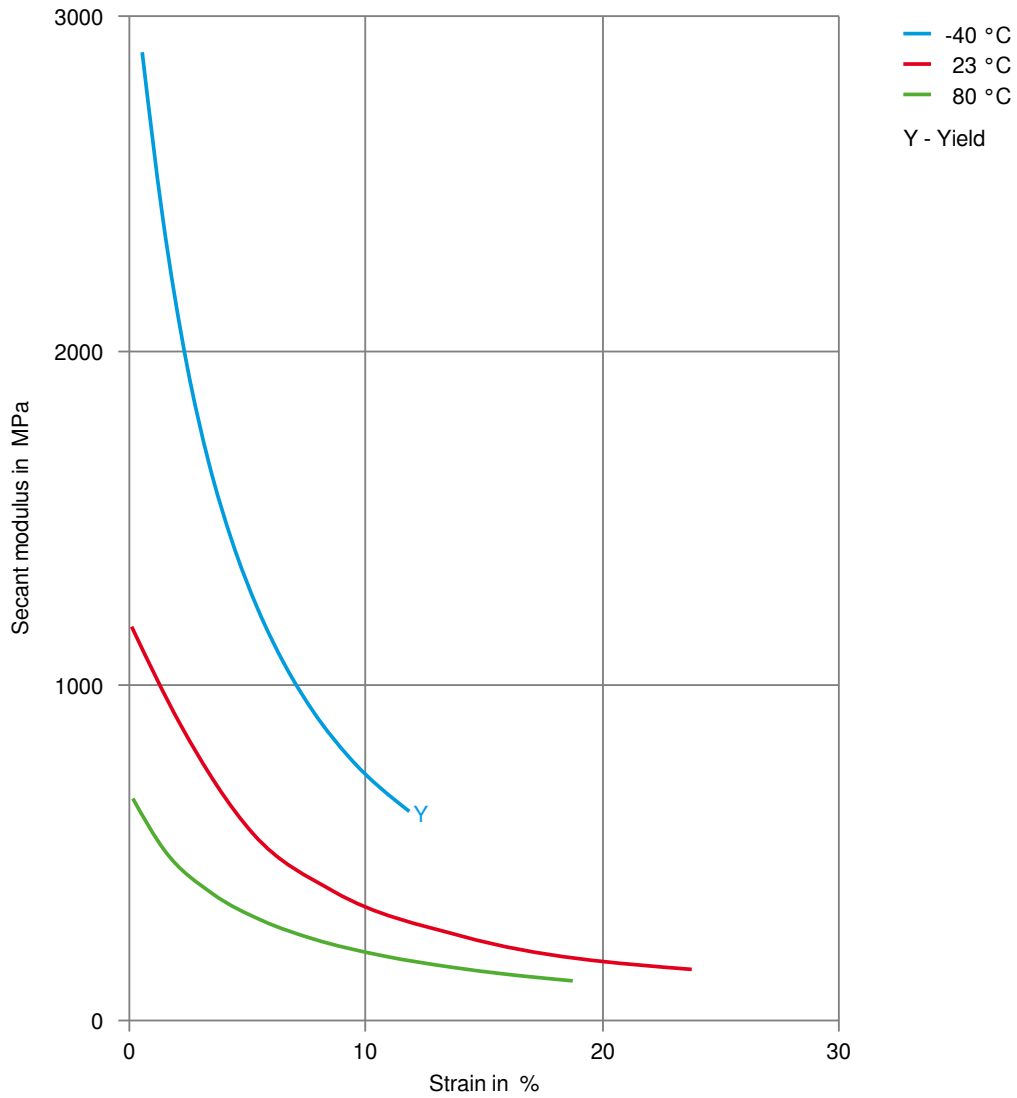

HOSTAFORM® XT 20

HOSTAFORM®

Stress-strain, 50mm/min

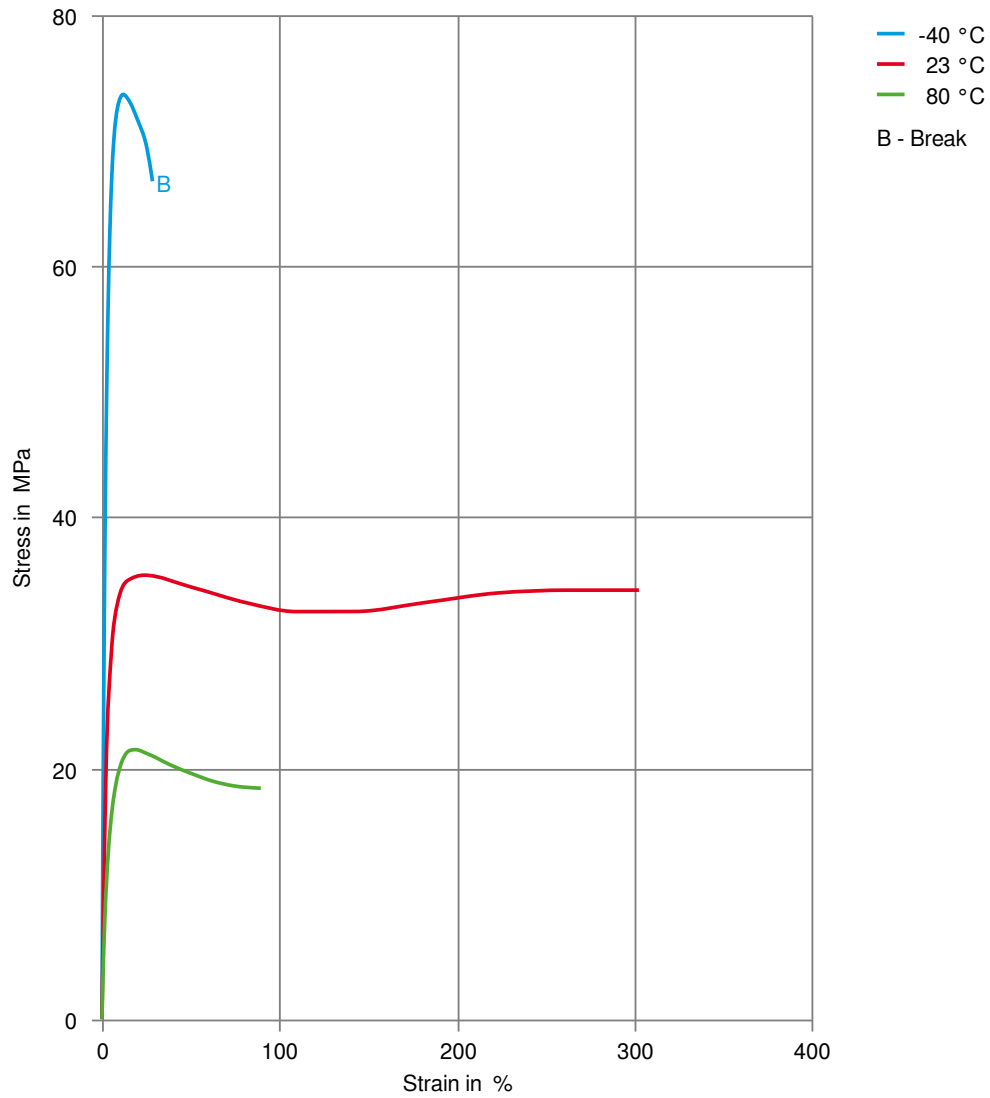

HOSTAFORM® XT 20

HOSTAFORM®

Secant modulus-strain, 50mm/min

