

CELSTRAN® PP-GF20-03 natural | PP | Glass Reinforced

Description

Material Code according to ISO 104-1: PP


Polypropylene homopolymer reinforced with 20 weight percent long glass fibers. The fibers are chemically coupled to the polypropylene matrix. Then pellets are cylindrical and normally as well as the embedded fibers 10mm long
Developed for aesthetic applications requiring good impact with a class A appearance.

Physical properties	Value	Unit	Test Standard
Density	1010	kg/m ³	ISO 1183
Mold shrinkage - parallel	0.47	%	ISO 294-4
Mold shrinkage - normal	0.70	%	ISO 294-4

Mechanical properties	Value	Unit	Test Standard
Tensile modulus (1mm/min)	5400	MPa	ISO 527-2/1A
Tensile stress at break (5mm/min)	105	MPa	ISO 527-2/1A
Tensile strain at break (5mm/min)	2.8	%	ISO 527-2/1A
Flexural modulus (23°C)	5150	MPa	ISO 178
Flexural strength (23°C)	160	MPa	ISO 178
Charpy notched impact strength @ 23°C	23.0	kJ/m ²	ISO 179/1eA

Thermal properties	Value	Unit	Test Standard
DTUL @ 1.8 MPa	157	°C	ISO 75-1/-2

Typical injection moulding processing conditions

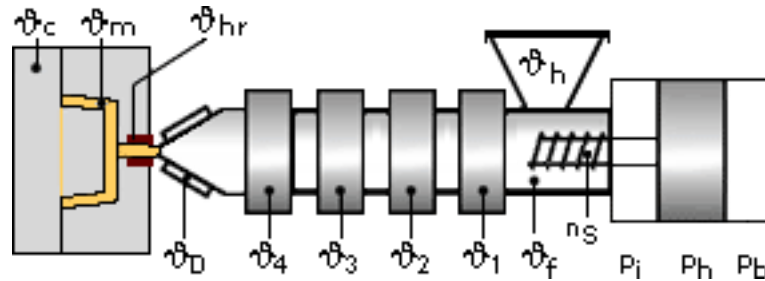

Temperature:

	∅Manifold	∅Mold	∅Melt	∅Nozzle	∅Zone4	∅Zone3	∅Zone2	∅Zone1	∅Feed
min (°C)	230	30	230	240	250	240	230	220	20
max (°C)	270	70	270	250	250	250	240	230	50

Pressure:

	Inj press	Hold press	Back pressure
min (bar)	600	400	0
max (bar)	1200	800	30



CELSTRAN® PP-GF20-03 natural | PP | Glass Reinforced

Speed:

Injection speed: slow

Screw speed

Screw diameter (mm)	16	25	40	55	75
Screw speed (RPM)	-	-	50	35	25