

CELSTRAN® PP-GF20-0553 ECO-B 352 BLACK

CELSTRAN® Long Fibre

Material code according to ISO 1043-1: PP Polypropylene copolymer reinforced with 20weight percent long glass fibers.Black. Low emission. The fibers are chemically coupled to the polypropylene matrix. The pellets are cylindrical and normally as well as the embedded fibers 11 mm long. Parts molded of CELSTRAN have outstanding mechanical properties such as high strength and stiffness combined with high heat deflection. The notched impact strength is increased at elevated and low temperatures due to the fiber skeleton built in the parts. The long fiber reinforcement reduces creep significantly. The very isotropic shrinkage in the molded parts minimizes the warpage. Complex parts can be manufactured with high reproducibility by injection molding. Application field: Functional/structural parts for automotive.

Celstran ECO-B 352 is a long fibre reinforced thermoplastic (LFRT) with the same properties and performance as standard grades, but produced with sustainability in mind. Using a mass-balance approach, 30% of biogenic feedstocks are used to offset the use of fossil-based raw materials and decrease greenhouse gas emissions. The process will be audited and certified according to the ISCC mass balance approach.

Product information

Resin Identification	PP-LGF20	ISO 1043
Part Marking Code	>PP-LGF20<	ISO 11469

Rheological properties

Moulding shrinkage, parallel	0.4 %	ISO 294-4, 2577
Moulding shrinkage, normal	0.5 %	ISO 294-4, 2577

Typical mechanical properties

Tensile modulus	4700 MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	84 MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	2.5 %	ISO 527-1/-2
Flexural modulus	4500 MPa	ISO 178
Flexural strength	140 MPa	ISO 178
Charpy impact strength, 23°C	56 kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	60 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	20 kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	20 kJ/m ²	ISO 179/1eA
Poisson's ratio	0.36 ^[C]	

[C]: Calculated

Thermal properties

Temperature of deflection under load, 1.8 MPa	159 °C	ISO 75-1/-2
Temperature of deflection under load, 8 MPa	136 °C	ISO 75-1/-2

Flammability

Burning Behav. at thickness h	HB class	IEC 60695-11-10
Thickness tested	1 mm	IEC 60695-11-10

Physical/Other properties

Density	1030 kg/m ³	ISO 1183
---------	------------------------	----------

CELSTRAN® PP-GF20-0553 ECO-B 352 BLACK

CELSTRAN® Long Fibre

VDA Properties

Emission of organic compounds	30 µgC/g	VDA 277
Thermal desorption analysis of organic emissions	96 µg/g	VDA 278
Odour	3.5 class	VDA 270

Injection

Drying Temperature	100 °C
Drying Time, Dehumidified Dryer	2 h
Processing Moisture Content	≤0.2 %
Melt Temperature Optimum	250 °C
Screw tangential speed	≤0.0982 m/s
Min. mould temperature	30 °C
Max. mould temperature	70 °C
Hold pressure range	40 - 80 MPa
Back pressure	3 MPa

Characteristics

Processing	Injection Moulding
Delivery form	Pellets
Special characteristics	High impact or impact modified, Heat stabilised or stable to heat, Low emissions
Sustainability	Bio-Content

Additional information

Processing Notes

Pre-Drying

It is normally not necessary to dry CELSTRAN PP. However, should there be surface moisture (condensate) on the molding compound as a result of incorrect storage, drying is required.


Storage

The product can then be stored in standard conditions until processed.

CELSTRAN® PP-GF20-0553 ECO-B 352 BLACK

CELSTRAN® Long Fibre


Stress-strain

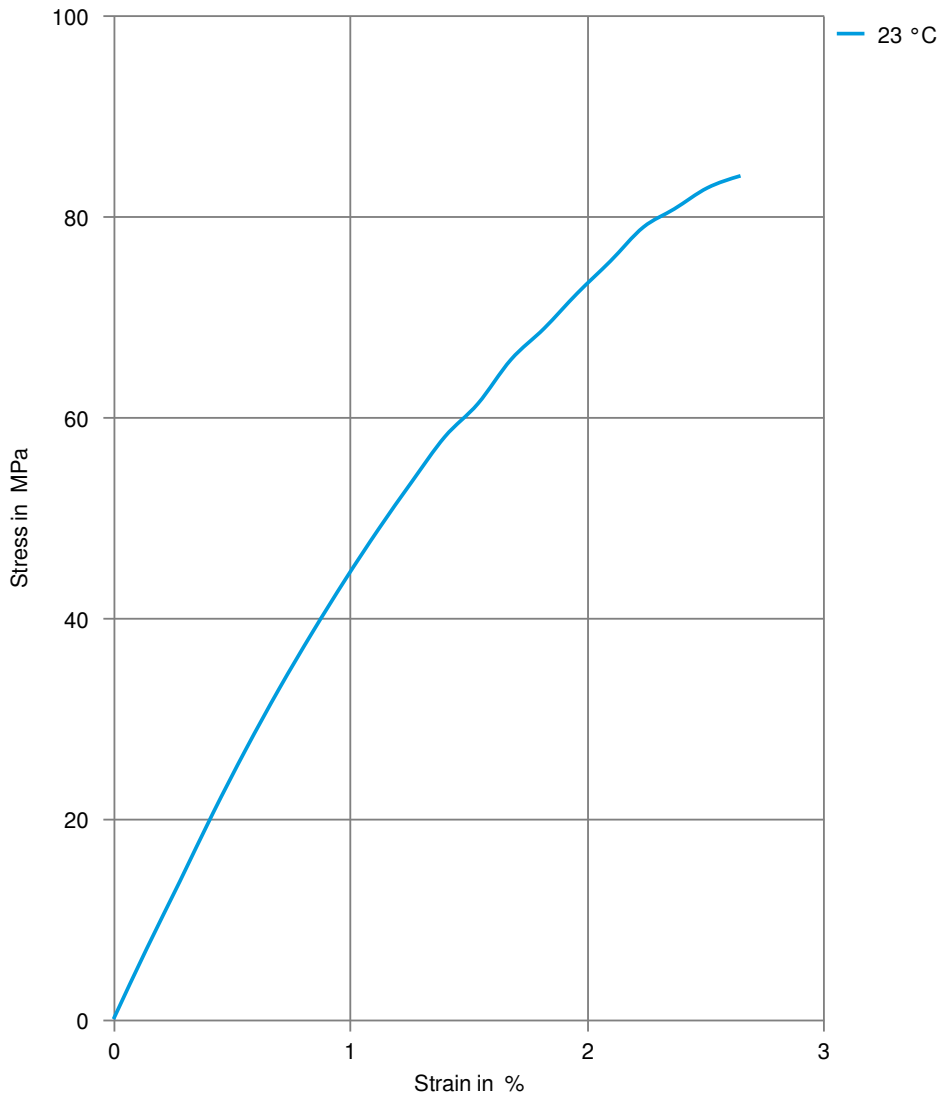

CELSTRAN® PP-GF20-0553 ECO-B 352 BLACK

CELSTRAN® Long Fibre


Secant modulus-strain

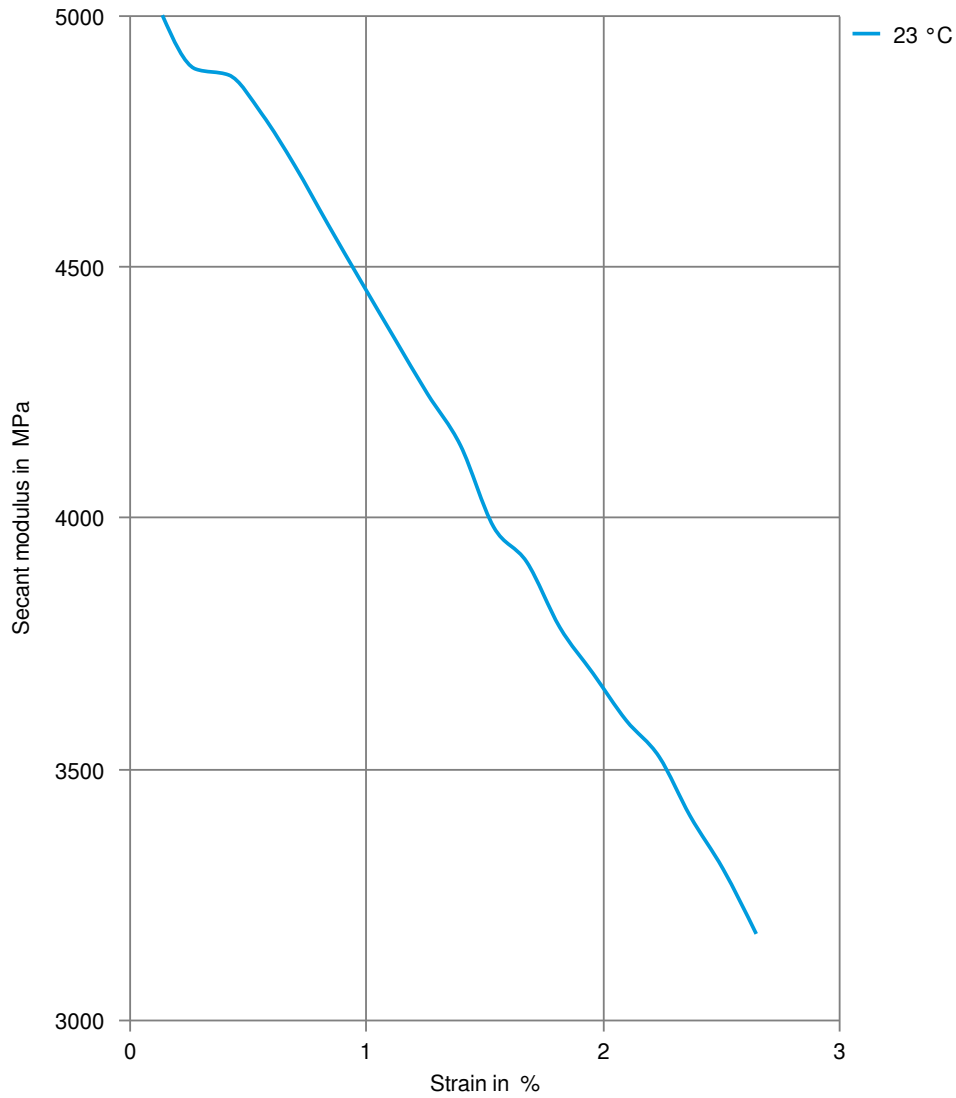

CELSTRAN® PP-GF20-0553 ECO-B 352 BLACK

CELSTRAN® Long Fibre

Stress-strain (isochronous) 23°C

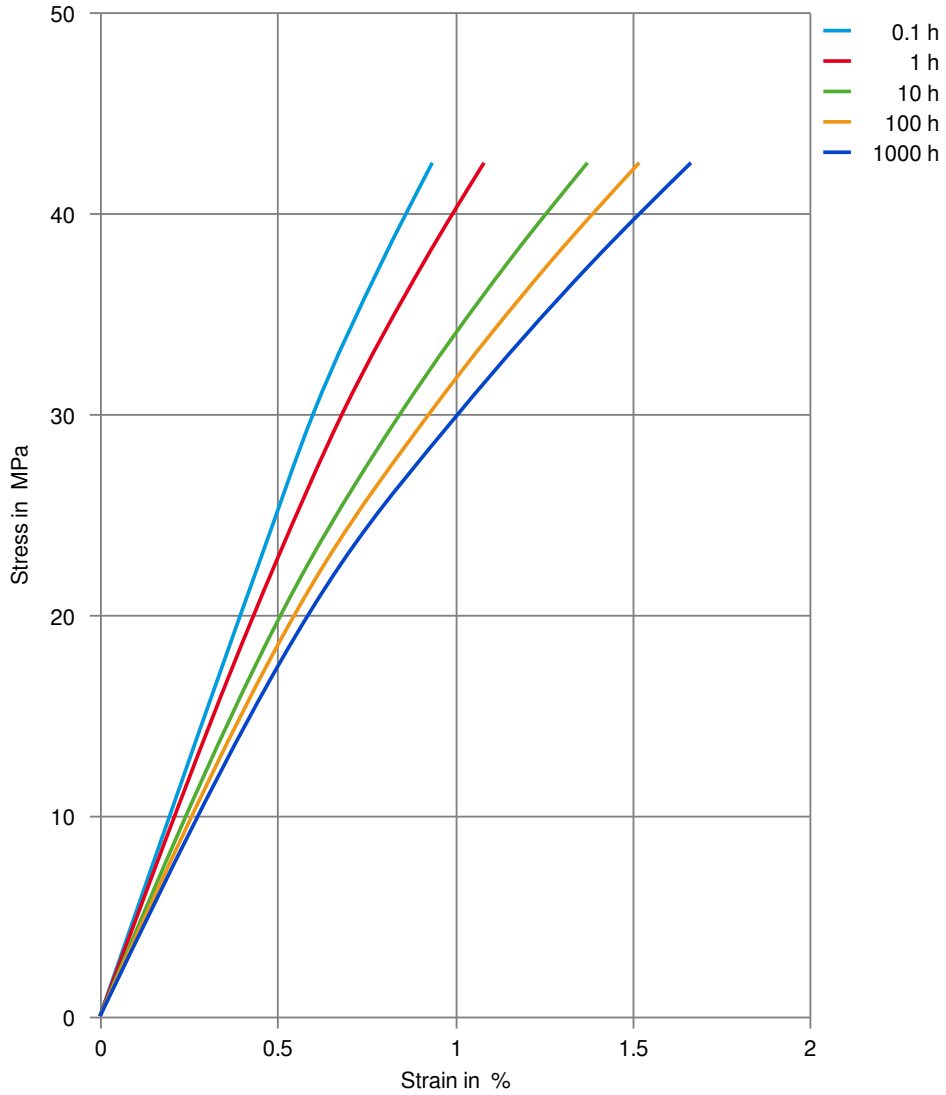

CELSTRAN® PP-GF20-0553 ECO-B 352 BLACK

CELSTRAN® Long Fibre

Creep modulus-time 23°C

