

CELSTRAN® PP-GF40-20 AD3004 BLACK

CELSTRAN® Long Fibre

40% long strand glass fiber reinforced polypropylene, higher tensile and impact strength, Black.

Product information

Resin Identification	PP-LGF40	ISO 1043
Part Marking Code	>PP-LGF40<	ISO 11469

Typical mechanical properties

Tensile modulus	10000 MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	150 MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	2.1 %	ISO 527-1/-2
Flexural modulus	8700 MPa	ISO 178
Flexural strength	200 MPa	ISO 178
Charpy notched impact strength, 23 °C	35 kJ/m ²	ISO 179/1eA
Poisson's ratio	0.34 ^[C]	

[C]: Calculated

Thermal properties

Temperature of deflection under load, 1.8 MPa	161 °C	ISO 75-1/-2
Temperature of deflection under load, 8 MPa	149 °C	ISO 75-1/-2

Physical/Other properties

Density	1210 kg/m ³	ISO 1183
---------	------------------------	----------

Injection

Back pressure	3 MPa
Ejection temperature	116 °C

Characteristics

Processing	Injection Moulding
Delivery form	Pellets
Special characteristics	High impact or impact modified

Additional information

Processing Notes

Pre-Drying

It is normally not necessary to dry CELSTRAN PP. However, should there be surface moisture (condensate) on the molding compound as a result of incorrect storage, drying is required.

Storage

The product can then be stored in standard conditions until processed.

CELSTRAN® PP-GF40-20 AD3004 BLACK

CELSTRAN® Long Fibre


Automotive

OEM
Ford
Stellantis - Chrysler

STANDARD
WSS-M4D865-B3
MS-DB-21 / CPN-5346

ADDITIONAL INFORMATION
Technical Black

Stress-strain

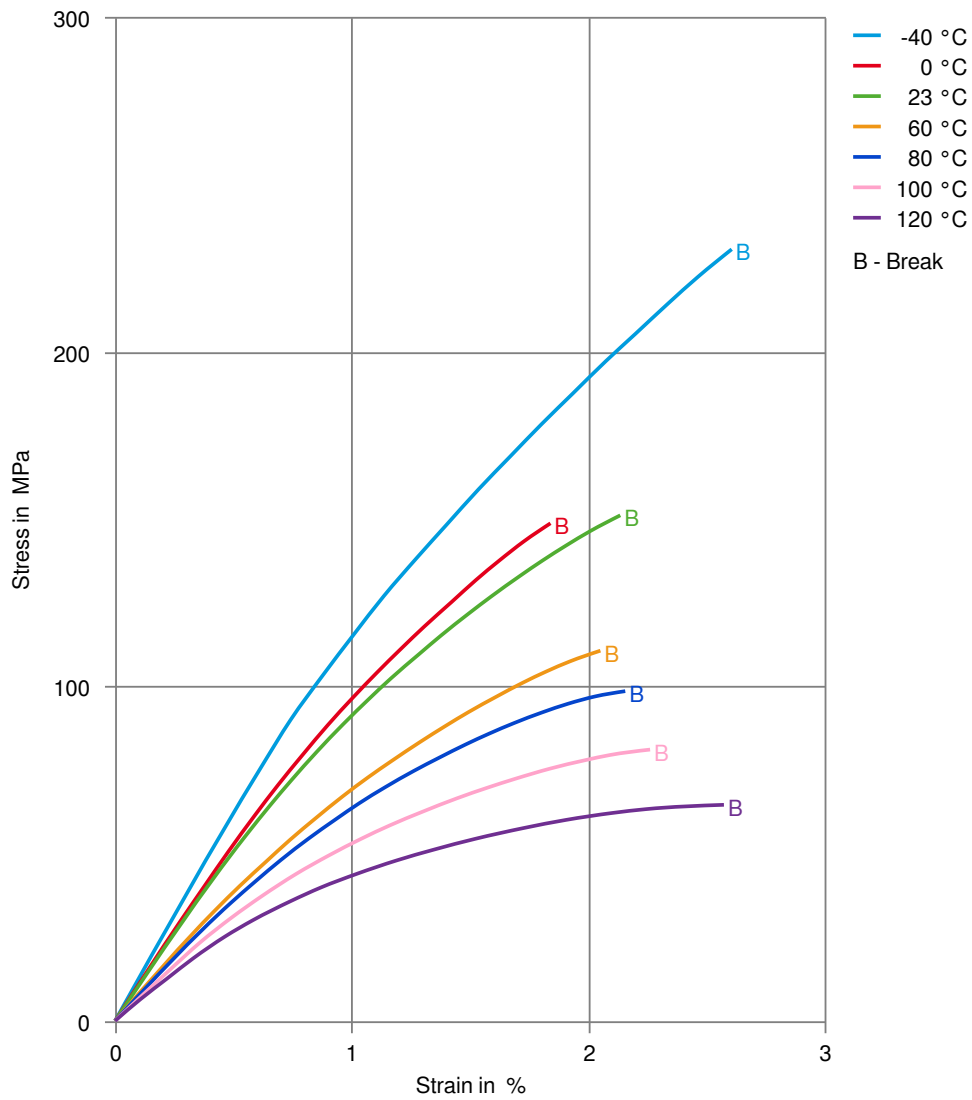

CELSTRAN® PP-GF40-20 AD3004 BLACK

CELSTRAN® Long Fibre

Secant modulus-strain

