

CELSTRAN® PP-GF50-02- NATURAL

CELSTRAN® Long Fibre

50% long strand glass fiber chemically coupled polypropylene, Natural

Product information

Resin Identification	PP-LGF50	ISO 1043
Part Marking Code	>PP-LGF50<	ISO 11469

Typical mechanical properties

Tensile modulus	11600 MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	148 MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	1.9 %	ISO 527-1/-2
Flexural modulus	12000 MPa	ISO 178
Flexural strength	250 MPa	ISO 178
Charpy notched impact strength, 23°C	44 kJ/m ²	ISO 179/1eA
Izod notched impact strength, 23°C	30 kJ/m ²	ISO 180/1A
Poisson's ratio	0.33 ^[C]	

[C]: Calculated

Flammability

Burning Behav. at 1.5mm nom. thickn.	HB class	IEC 60695-11-10
Thickness tested	1.5 mm	IEC 60695-11-10
UL recognition	yes	UL 94

Physical/Other properties

Density	1330 kg/m ³	ISO 1183
---------	------------------------	----------

Injection

Back pressure	3 MPa
---------------	-------

Characteristics

Processing	Injection Moulding
Delivery form	Pellets

Additional information

Processing Notes

Pre-Drying

It is normally not necessary to dry CELSTRAN PP. However, should there be surface moisture (condensate) on the molding compound as a result of incorrect storage, drying is required.


Storage

The product can then be stored in standard conditions until processed.

CELSTRAN® PP-GF50-02- NATURAL

CELSTRAN® Long Fibre

Stress-strain

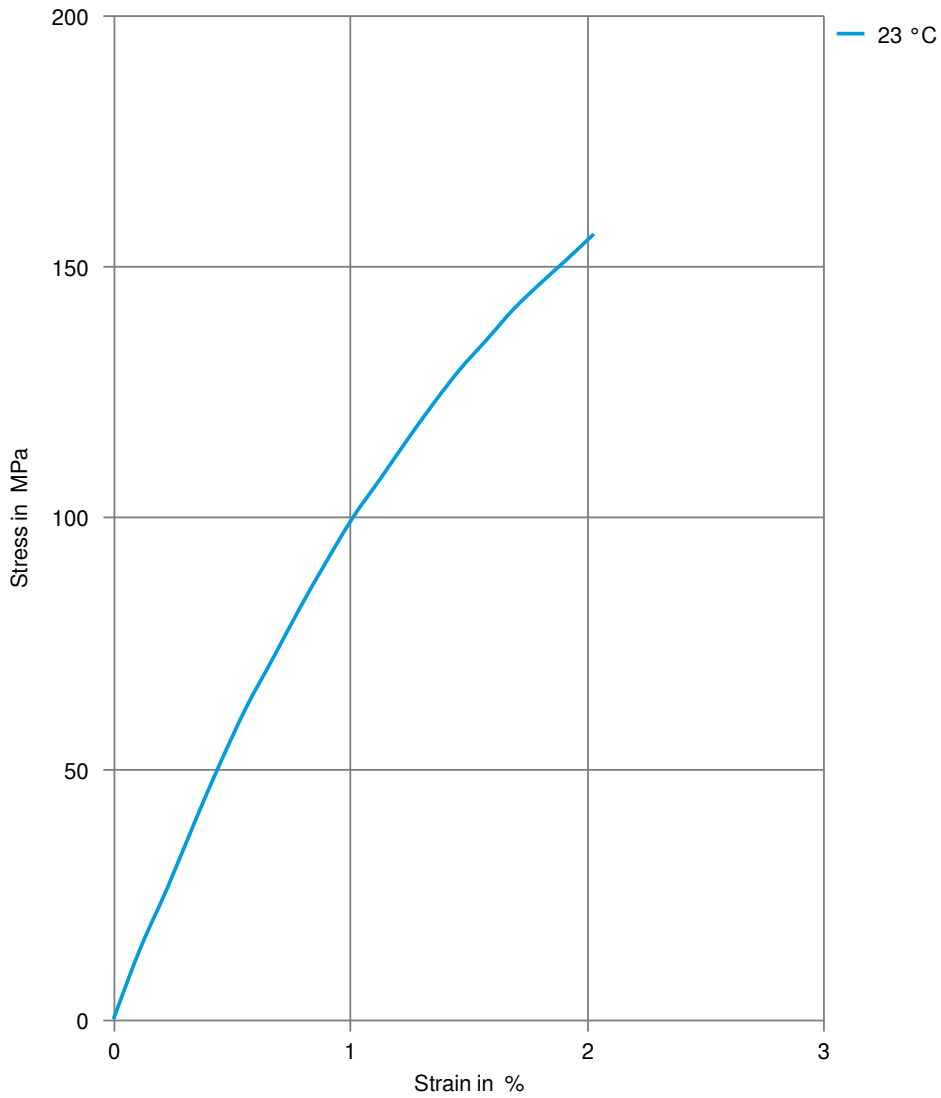

CELSTRAN® PP-GF50-02- NATURAL

CELSTRAN® Long Fibre

Secant modulus-strain

