

TECNOPRENE® FK10 NERO900 - PP

Description

Polypropylene, homopolymer, 50% glass fiber reinforced, chemically coupled.


Physical properties	Value	Unit	Test Standard
Density	1330	kg/m ³	ISO 1183
Melt flow rate, MFR	5	g/10min	ISO 1133
MFR temperature	230	°C	ISO 1133
MFR load	2.16	kg	ISO 1133

Mechanical properties	Value	Unit	Test Standard
Tensile stress at break, 5mm/min	105	MPa	ISO 527-2/1A
Tensile strain at break, 5mm/min	2.5	%	ISO 527-2/1A
Flexural modulus, 23°C	10800	MPa	ISO 178
Flexural strength, 23°C	170	MPa	ISO 178
Charpy notched impact strength, 23°C	11.5	kJ/m ²	ISO 179/1eA
Izod impact notched, 23°C	12	kJ/m ²	ISO 180/1A


Thermal properties	Value	Unit	Test Standard
DTUL at 1.8 MPa	151	°C	ISO 75-1, -2
Flammability @1.6mm nom. thickn.	HB	class	UL 94

Diagrams

Stress-strain

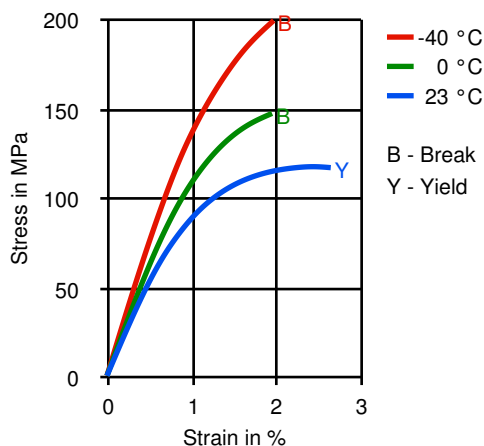


Secant modulus-strain

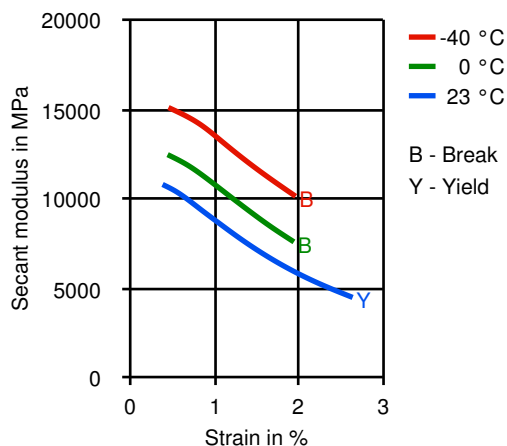

True Stress-strain

TECNOPRENE® FK10 NERO900 - PP

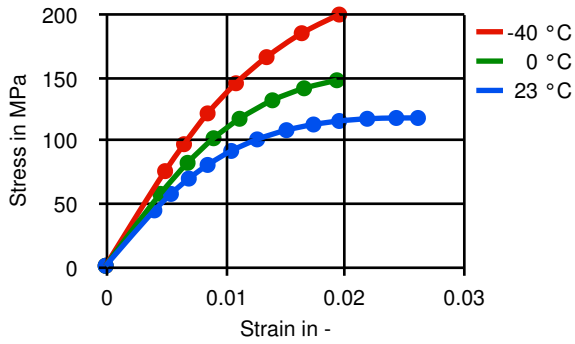

Typical injection moulding processing conditions

Pre Drying		Value	Unit	Test Standard
Drying time		2 - 3	h	-
Drying temperature		80 - 100	°C	-
Temperature		Value	Unit	Test Standard
Zone1 temperature		200 - 220	°C	-
Zone2 temperature		220 - 240	°C	-
Zone3 temperature		240 - 260	°C	-
Mold temperature		50 - 80	°C	-

Other text information

Longer pre-drying times/storage

This product should be stored in a covered facility and kept away from moisture and heat.

Characteristics

Special Characteristics

Auto spec approved

Processing

Injection molding

Product Categories

Glass reinforced