

FORTRON® 1200L1

Polyphenylene sulfide

Fortron 1200L1 is an unfilled grade recommended primarily for extrusion applications. It has a high melt viscosity and tensile elongation. Recommended processing conditions are similar to those of our standard unfilled PPS grades.

Product information

Resin Identification	PPS	ISO 1043
Part Marking Code	>PPS<	ISO 11469

Rheological properties

Moulding shrinkage, parallel	1.3 %	ISO 294-4, 2577
Moulding shrinkage, normal	1.6 %	ISO 294-4, 2577

Typical mechanical properties

Tensile modulus	4000 MPa	ISO 527-1/-2
Tensile strain at yield, 50mm/min	3 %	ISO 527-1/-2
Tensile stress at break, 50mm/min	88 MPa	ISO 527-1/-2
Tensile strain at break, 50mm/min	15 %	ISO 527-1/-2
Flexural modulus	4100 MPa	ISO 178
Flexural strength	140 MPa	ISO 178
Charpy impact strength, 23°C	200 kJ/m ²	ISO 179/1eU
Hardness, Rockwell, M-scale	93	ISO 2039-2
Poisson's ratio	0.36 ^[C]	

[C]: Calculated

Thermal properties

Melting temperature, 10°C/min	280 ^[OT, 1] °C	ISO 11357-1/-3
Glass transition temperature, 10°C/min	90 °C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	100 ^[2] °C	ISO 75-1/-2
Temperature of deflection under load, 8 MPa	87 ^[2] °C	ISO 75-1/-2
Coefficient of linear thermal expansion (CLTE), parallel	40 E-6/K	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), normal	42 E-6/K	ISO 11359-1/-2

[OT]: One time tested

[1]: In alignment with all regional Product Specialists - changed from 275°C to 280°C as no one is aware of where 275°C is coming from

[2]: FO 1200L1 SF3001 Natural (>PPS<)DTUL @ 1.8 & 8.0 MPa

Flammability

Burning Behav. at thickness h	V-0 class	IEC 60695-11-10
Thickness tested	3 mm	IEC 60695-11-10

Electrical properties

Electric strength	30 kV/mm	IEC 60243-1
-------------------	----------	-------------

FORTRON® 1200L1

Polyphenylene sulfide

Physical/Other properties

Water absorption, 2mm	0.02 %	Sim. to ISO 62
Density	1340 kg/m ³	ISO 1183

Injection

Drying Recommended	yes
Drying Temperature	100 °C
Drying Time, Dehumidified Dryer	2 - 4 h
Processing Moisture Content	≤0.02 %
Melt Temperature Optimum	330 °C
Min. melt temperature	310 °C
Max. melt temperature	340 °C
Screw tangential speed	0.2 - 0.3 m/s
Mold Temperature Optimum	150 °C
Min. mould temperature	140 °C
Max. mould temperature	160 °C
Hold pressure range	30 - 70 MPa

Characteristics

Processing	Injection Moulding, Film Extrusion, Extrusion, Sheet Extrusion, Other Extrusion
Delivery form	Pellets

Additional information

Processing Notes


Processing Notes

The higher drying conditions result in higher melt viscosity.

FORTRON® 1200L1

Polyphenylene sulfide

Stress-strain

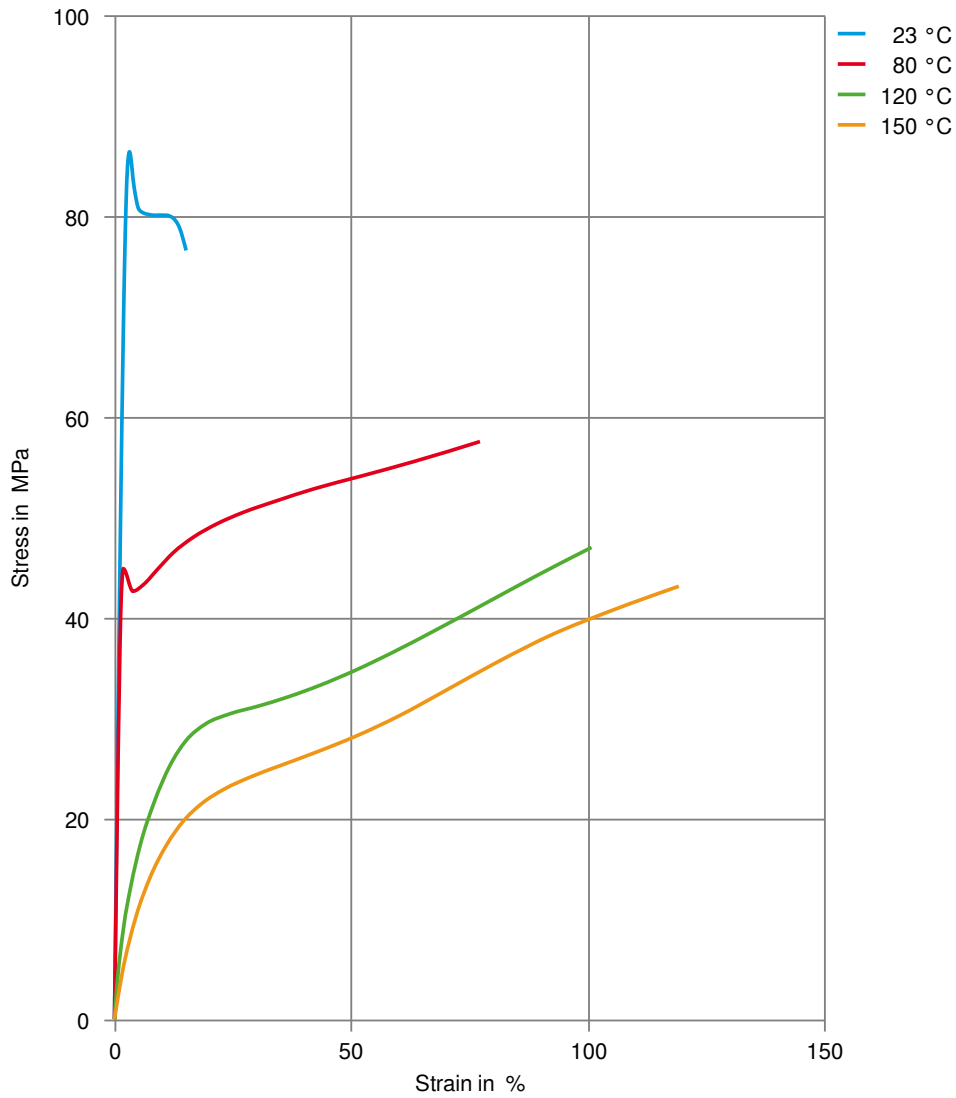

FORTRON[®] 1200L1

Polyphenylene sulfide

Secant modulus-strain

