

FORTRON® 1342L4

Polyphenylene sulfide

Fortron 1342L4 is a low wear glass filled grade, ideally suited for bearings, gears and other sliding friction/wear applications.

Product information

Resin Identification	PPS-GF40	ISO 1043
Part Marking Code	>PPS-GF40<	ISO 11469

Rheological properties

Moulding shrinkage, parallel	0.2 %	ISO 294-4, 2577
Moulding shrinkage, normal	0.5 %	ISO 294-4, 2577

Typical mechanical properties

Tensile modulus	14400 MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	165 MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	1.6 %	ISO 527-1/-2
Flexural modulus	13700 MPa	ISO 178
Flexural strength	240 MPa	ISO 178
Compressive strength	170 MPa	ISO 604
Charpy impact strength, 23°C	44 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	8.5 kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	8.5 kJ/m ²	ISO 179/1eA
Izod notched impact strength, 23°C	8.5 kJ/m ²	ISO 180/1A
Izod notched impact strength, -30°C	8.5 kJ/m ²	ISO 180/1A
Izod impact strength, 23°C	8.54 kJ/m ²	ISO 180/1U
Poisson's ratio	0.33 ^[C]	

[C]: Calculated

Tribological properties

Coefficient of static friction, against steel	0.2	ISO 8295
---	-----	----------

Thermal properties

Melting temperature, 10°C/min	280 °C	ISO 11357-1/-3
Glass transition temperature, 10°C/min	90 °C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	270 °C	ISO 75-1/-2
Temperature of deflection under load, 8 MPa	215 °C	ISO 75-1/-2
Coefficient of linear thermal expansion (CLTE), parallel	22 E-6/K	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), normal	40 E-6/K	ISO 11359-1/-2

Flammability

Burning Behav. at 1.5mm nom. thickn.	V-0 class	IEC 60695-11-10
Thickness tested	1.5 mm	IEC 60695-11-10
Burning Behav. at thickness h	V-0 class	IEC 60695-11-10
Thickness tested	0.75 mm	IEC 60695-11-10

FORTRON® 1342L4

Polyphenylene sulfide

Physical/Other properties

Water absorption, 2mm	0.02 %	Sim. to ISO 62
Water absorption, Immersion 24h	0.02 %	Sim. to ISO 62
Density	1700 kg/m ³	ISO 1183

Injection

Drying Recommended	yes
Drying Temperature	130 °C
Drying Time, Dehumidified Dryer	2 - 4 h
Processing Moisture Content	≤0.02 %
Melt Temperature Optimum	330 °C
Min. melt temperature	310 °C
Max. melt temperature	340 °C
Screw tangential speed	0.2 - 0.3 m/s
Mold Temperature Optimum	150 °C
Min. mould temperature	140 °C
Max. mould temperature	160 °C
Hold pressure range	30 - 70 MPa
Back pressure	3 MPa
Ejection temperature	215 °C

Characteristics

Processing	Injection Moulding
Delivery form	Pellets
Additives	Release agent
Special characteristics	Flame retardant, Low wear / Low friction

Additional information

Injection molding

Preprocessing

Predrying in a dehumidified air dryer at 130 - 140 degC/3-4 hours is recommended.

Processing

On injection molding machines with 15-25 D long three-section screws, as are usual in the trade, the FORTRON is processable. A shut-off nozzle is preferred to a free-flow nozzle.

Melt temperature 320-340 degC
Mold wall temperature at least 140 degC

A medium injection rate is normally preferred. All mold cavities must be effectively vented.

Postprocessing

FORTRON® 1342L4

Polyphenylene sulfide

Tool temperature of at least 135 degC is recommended for parts to achieve maximum crystallizable potential.

Processing Notes

Pre-Drying

FORTRON should in principle be predried. Because of the necessary low maximum residual moisture content the use of dry air dryers is recommended. The dew point should be $\leq -30^{\circ}\text{C}$. The time between drying and processing should be as short as possible.

Storage

For subsequent storage the material should be stored dry in the dryer until processed ($\leq 60\text{ h}$).

Automotive


OEM
Mercedes-Benz

ADDITIONAL INFORMATION
Fuel

FORTRON® 1342L4

Polyphenylene sulfide

Stress-strain

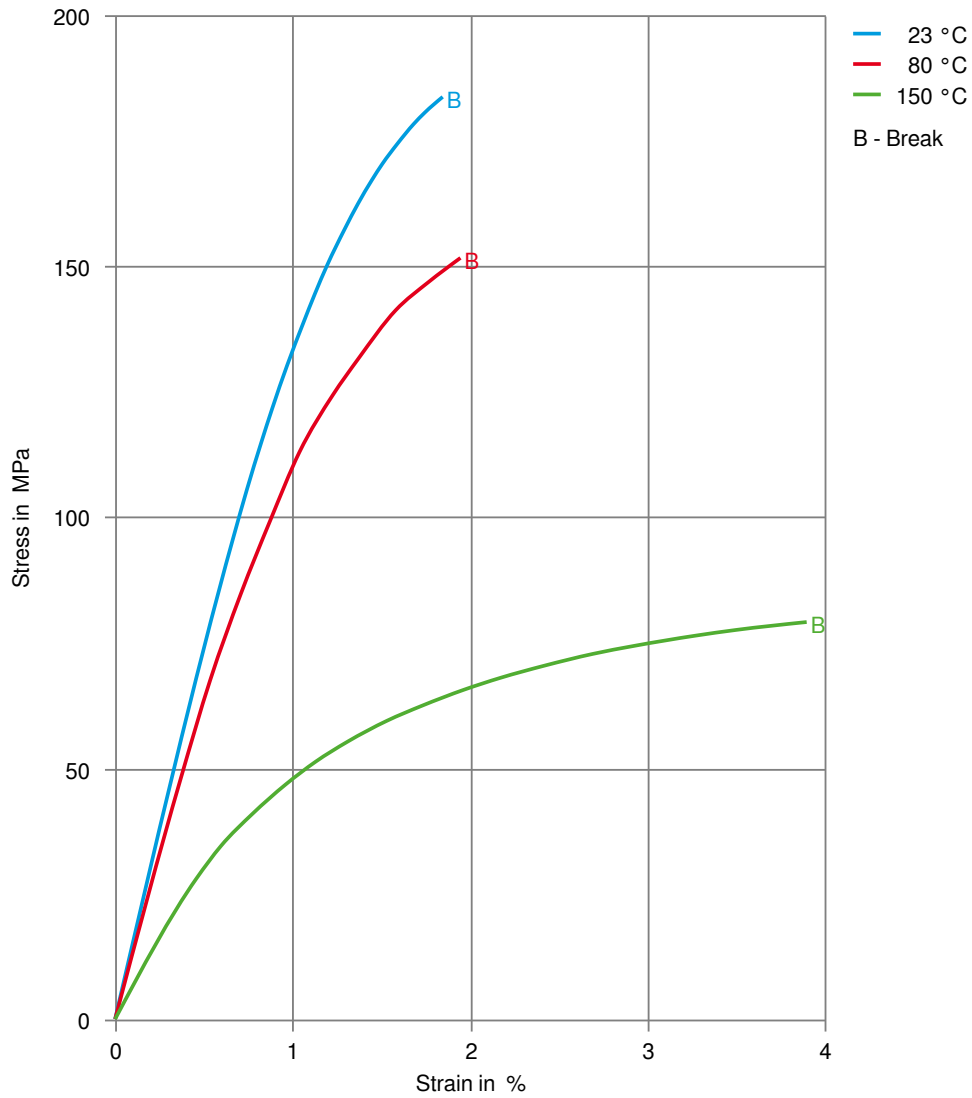

FORTRON® 1342L4

Polyphenylene sulfide

Secant modulus-strain

