

FORTRON® ICE 504L

Polyphenylene sulfide

FORTRON ICE 504L is a 40% glass fiber reinforced polyphenylene sulfide, that belongs to our new generation of Fortron® PPS.

This new technology allows optimization of molding conditions with faster cycle times. Due to the faster crystallization of the material at a higher temperature, the option of mold wall temperature reduction can be subject of advanced process optimization. The potential for optimization of Fortron® ICE by cycle time reduction is possible by standard cavity surface temperatures of 140 °C. The potential for lowering the mold temperature must be checked individually and it depends on process and part design.

Product information

Resin Identification	PPS-GF40	ISO 1043
Part Marking Code	>PPS-GF40<	ISO 11469

Rheological properties

Moulding shrinkage, parallel	0.3 %	ISO 294-4, 2577
Moulding shrinkage, normal	0.6 %	ISO 294-4, 2577

Typical mechanical properties

Tensile modulus	15100 MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	202 MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	1.9 %	ISO 527-1/-2
Flexural modulus	15000 MPa	ISO 178
Flexural strength	290 MPa	ISO 178
Compressive modulus	15000 MPa	ISO 604
Compressive strength	265 MPa	ISO 604
Charpy impact strength, 23 °C	53 kJ/m ²	ISO 179/1eU
Charpy impact strength, -30 °C	53 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23 °C	10 kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30 °C	10 kJ/m ²	ISO 179/1eA
Izod notched impact strength, 23 °C	10 kJ/m ²	ISO 180/1A
Izod notched impact strength, -30 °C	10.0 kJ/m ²	ISO 180/1A
Izod impact strength, 23 °C	34 kJ/m ²	ISO 180/1U
Izod impact strength, -30 °C	34 kJ/m ²	ISO 180/1U
Hardness, Rockwell, M-scale	100	ISO 2039-2
Poisson's ratio	0.33 ^[C]	

[C]: Calculated

Thermal properties

Melting temperature, 10 °C/min	280 °C	ISO 11357-1/-3
Glass transition temperature, 10 °C/min	90 °C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	270 °C	ISO 75-1/-2
Temperature of deflection under load, 8 MPa	215 °C	ISO 75-1/-2
Coefficient of linear thermal expansion (CLTE), parallel	26 E-6/K	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), normal	42 E-6/K	ISO 11359-1/-2
Specific heat capacity of melt	1500 J/(kg K)	ISO 22007-4

FORTRON® ICE 504L

Polyphenylene sulfide

Flammability

Burning Behav. at 1.5mm nom. thickn.	V-0 class	IEC 60695-11-10
Thickness tested	1.5 mm	IEC 60695-11-10
Burning Behav. at thickness h	V-0 class	IEC 60695-11-10
Thickness tested	0.38 mm	IEC 60695-11-10
Oxygen index	47 %	ISO 4589-1/-2
Glow Wire Flammability Index, 1.0mm	960 °C	IEC 60695-2-12
Glow Wire Flammability Index, 2.0mm	960 °C	IEC 60695-2-12
Glow Wire Ignition Temperature, 1.0mm	825 °C	IEC 60695-2-13
Glow Wire Ignition Temperature, 2.0mm	825 °C	IEC 60695-2-13

Electrical properties

Relative permittivity, 1MHz	4.1	IEC 62631-2-1
Dissipation factor, 1MHz	20 E-4	IEC 62631-2-1
Volume resistivity	1E14 ^[OT] Ohm.m	IEC 62631-3-1
Volume resistivity, at high temperature	1E10 ^[OT] Ohm.m	IEC 62631-3-1
Temperature	220 ^[OT] °C	
Surface resistivity	>1E15 Ohm	IEC 62631-3-2
Surface resistivity, at high temperature	1E10 ^[OT] Ohm	IEC 62631-3-2
Temperature	220 ^[OT] °C	
Electric strength, Direct Current	40 ^[OT] kV/mm	IEC 60243-2
Electric strength, DC, high temperature	27 ^[OT] kV/mm	IEC 60243-2
Temperature	220 ^[OT] °C	
Comparative tracking index	125	IEC 60112

[OT]: One time tested

Physical/Other properties

Water absorption, 2mm	0.02 %	Sim. to ISO 62
Density	1650 kg/m ³	ISO 1183

Injection

Drying Recommended	yes
Drying Temperature	130 °C
Drying Time, Dehumidified Dryer	2 - 4 h
Processing Moisture Content	≤0.02 %
Melt Temperature Optimum	330 °C
Min. melt temperature	310 °C
Max. melt temperature	340 °C
Screw tangential speed	0.2 - 0.3 m/s
Mold Temperature Optimum	140 °C
Min. mould temperature	125 °C
Max. mould temperature	160 °C
Hold pressure range	30 - 70 MPa
Back pressure	3 MPa
Ejection temperature	232 °C

FORTRON® ICE 504L

Polyphenylene sulfide

Characteristics

Processing	Injection Moulding
Delivery form	Pellets
Additives	Release agent, Nucleated
Special characteristics	Flame retardant, Heat stabilised or stable to heat, Chemical resistant

Additional information

Processing Notes

Pre-Drying

FORTRON should in principle be predried. Because of the necessary low maximum residual moisture content the use of dry air dryers is recommended. The dew point should be $\leq -30^{\circ}\text{C}$. The time between drying and processing should be as short as possible.

Storage

For subsequent storage the material should be stored dry in the dryer until processed (≤ 60 h).


Automotive

OEM	STANDARD	ADDITIONAL INFORMATION
General Motors	GMW17521P-PPS-GF40	
Hyundai	MS244-02 Type A-2	
Renault	IP03a, No Spec, Special Part Approval, See Your CE Account Manager.	
Stellantis	MS.50152 / PPS.GF40.14000T.7C.GR-ICE	CPN3502 BLACK
Stellantis - Chrysler	MS-DB-570 / CPN-3502	Black
VW Group	VW 50137	

FORTRON® ICE 504L

Polyphenylene sulfide

Stress-strain

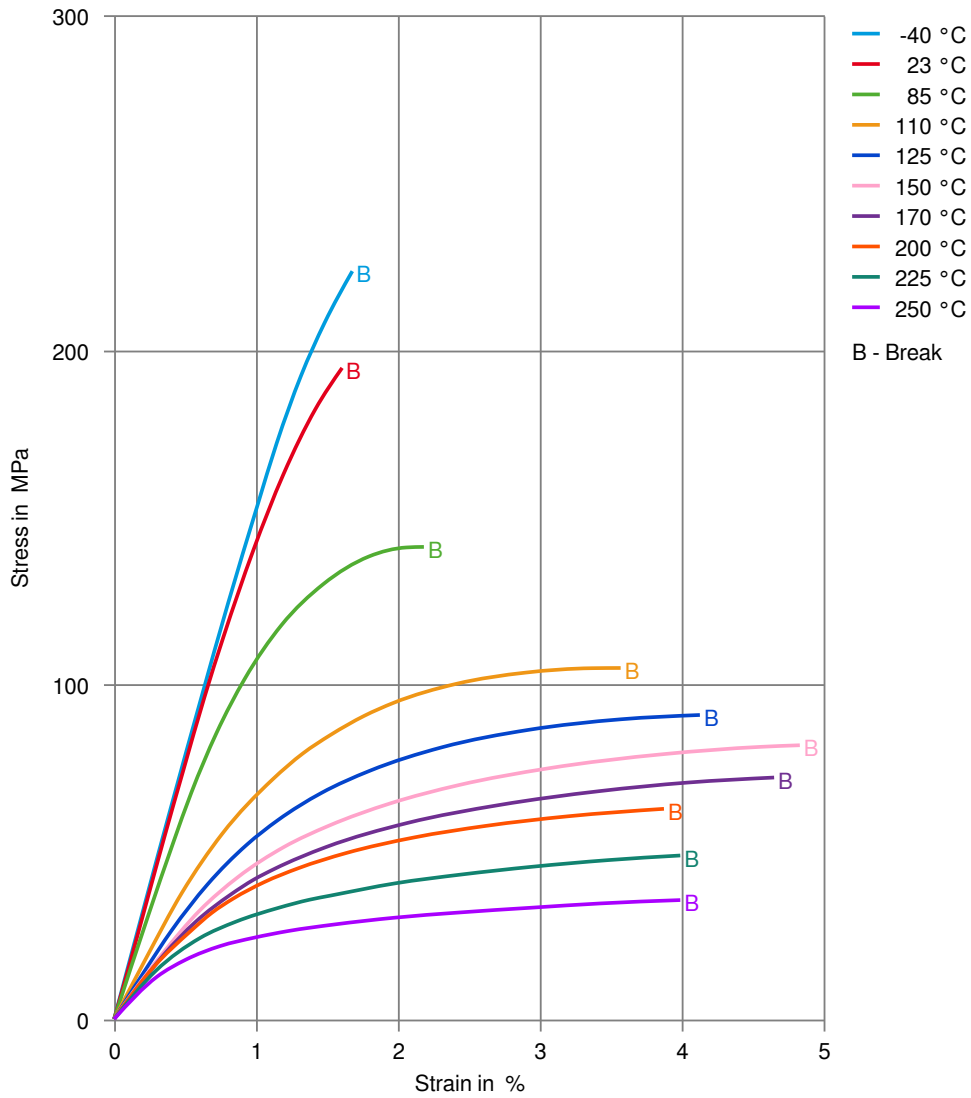

FORTRON® ICE 504L

Polyphenylene sulfide

Secant modulus-strain

