

Hytrel® 3078 ECO-B 752

THERMOPLASTIC POLYESTER ELASTOMER

Common features of Hytrel® thermoplastic polyester elastomer include mechanical and physical properties such as exceptional toughness and resilience, high resistance to creep, impact and flex fatigue, flexibility at low temperatures and good retention of properties at elevated temperatures. In addition, it resists many industrial chemicals, oils and solvents. Special grades include heat stabilised, flame retardant, food contact compliant, blow molding and extrusion grades. Concentrates offered include black pigments, UV protection additives, heat stabilisers, and flame retardants. Hytrel® thermoplastic polyester elastomer is plasticiser free.

The good melt stability of Hytrel® thermoplastic polyester elastomer normally enables the recycling of properly handled production waste. If recycling is not possible, we recommend, as the preferred option, incineration with energy recovery (-24 kJ/g of base polymer) in appropriately equipped installations.

For disposal, local regulations have to be observed.

Hytrel® thermoplastic polyester elastomer typically is used in demanding applications in the automotive, fluid power, electrical/electronic, consumer goods, appliance and power tool, sporting goods, furniture, industrial and off-road transportation/equipment industry.

Hytrel® 3078 ECO-B 752 is a very low modulus grade, with nominal hardness of 30D. It contains non-discoloring stabilizer. It can be processed by many conventional thermoplastic processing techniques like injection molding and extrusion. It has same performance and processing properties as Hytrel® 3078.

Hytrel® 3078 ECO-B 752 belongs to the Hytrel® ECO-B family. The products of this family are partially produced using bio-feedstock derived from waste*. This results in reduced lifecycle greenhouse gas emissions and lower fossil resource use.

*certified bio-circular according to ISCC Plus mass balance approach.

Food compliance:

Refer to Hytrel® 3078FG

Typical applications:

Compounding, extrusion, injection moulded and over-moulded parts for consumer use.

Rheological properties

Melt volume-flow rate	5 cm ³ /10min	ISO 1133
Temperature	190 °C	
Load	2.16 kg	
Melt mass-flow rate	5 g/10min	ISO 1133
Melt mass-flow rate, Temperature	190 °C	
Melt mass-flow rate, Load	2.16 kg	
Moulding shrinkage, parallel	0.8 %	ISO 294-4, 2577
Moulding shrinkage, normal	0.5 %	ISO 294-4, 2577

Typical mechanical properties

Tensile modulus	22 ^[1] MPa	ISO 527-1/-2
Stress at 10% strain	1.8 MPa	ISO 527-1/-2
Tensile stress at 50% strain, 1BA	5 MPa	ISO 527-1/-2
Tensile stress at break	24 MPa	ISO 527-1/-2
Nominal strain at break	900 %	ISO 527-1/-2
Tensile strain at break	>300 %	ISO 527-1/-2
Flexural modulus	27 MPa	ISO 178

Hytrel® 3078 ECO-B 752

THERMOPLASTIC POLYESTER ELASTOMER

Tensile creep modulus, 1000h	18 MPa	ISO 899-1
Charpy impact strength, 23°C	N kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	N kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	N kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	N kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -40°C	N kJ/m ²	ISO 179/1eA
Izod notched impact strength, 23°C	N kJ/m ²	ISO 180/1A
Izod notched impact strength, -40°C	N kJ/m ²	ISO 180/1A
Poisson's ratio	0.5	
Brittleness temperature	-98 °C	ISO 974
Shore D hardness, 15s	24	ISO 48-4 / ISO 868
Shore D hardness, max	30	ISO 868
Tear strength, parallel	80 kN/m	ISO 34-1
Tear strength, normal	77 kN/m	ISO 34-1

[1]: measured on 1BA specimen pulled at 50mm/min

Thermal properties

Melting temperature, 10°C/min	170 °C	ISO 11357-1/-3
Glass transition temperature, 10°C/min	-60 °C	ISO 11357-1/-3
Vicat softening temperature, 50°C/h 10N	80 °C	ISO 306
Coefficient of linear thermal expansion (CLTE), parallel	177 E-6/K	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), normal	206 E-6/K	ISO 11359-1/-2
Thermal conductivity of melt	0.15 W/(m K)	ISO 22007-2
Effective thermal diffusivity, flow	5.44E-8 m ² /s	ISO 22007-4
Specific heat capacity of melt	2150 J/(kg K)	ISO 22007-4
RTI, electrical, 1.5mm	50 °C	UL 746B
RTI, electrical, 3.0mm	50 °C	UL 746B
RTI, impact, 1.5mm	50 °C	UL 746B
RTI, impact, 3.0mm	50 °C	UL 746B
RTI, strength, 1.5mm	50 °C	UL 746B
RTI, strength, 3.0mm	50 °C	UL 746B

Flammability

Burning Behav. at 1.5mm nom. thickn.	HB class	IEC 60695-11-10
Thickness tested	1.5 mm	IEC 60695-11-10
UL recognition	yes	UL 94
Burning Behav. at thickness h	HB class	IEC 60695-11-10
Thickness tested	3 mm	IEC 60695-11-10
UL recognition	yes	UL 94
Oxygen index	19 %	ISO 4589-1/-2
FMVSS Class	B	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	33 mm/min	ISO 3795 (FMVSS 302)

Hytrel® 3078 ECO-B 752

THERMOPLASTIC POLYESTER ELASTOMER

Electrical properties

Relative permittivity, 100Hz	5.4	IEC 62631-2-1
Relative permittivity, 1MHz	5.3	IEC 62631-2-1
Dissipation factor, 100Hz	70 E-4	IEC 62631-2-1
Dissipation factor, 1MHz	150 E-4	IEC 62631-2-1
Volume resistivity	1E11 Ohm.m	IEC 62631-3-1
Surface resistivity	1E14 Ohm	IEC 62631-3-2
Electric strength	18 kV/mm	IEC 60243-1

Physical/Other properties

Humidity absorption, 2mm	0.2 %	Sim. to ISO 62
Water absorption, 2mm	0.8 %	Sim. to ISO 62
Water absorption, Immersion 24h	0.5 %	Sim. to ISO 62
Density	1070 kg/m ³	ISO 1183
Density of melt	940 kg/m ³	

Injection

Drying Recommended	yes
Drying Temperature	80 °C
Drying Time, Dehumidified Dryer	2 - 3 h
Processing Moisture Content	≤0.08 %
Melt Temperature Optimum	205 °C
Min. melt temperature	190 °C
Max. melt temperature	210 °C
Mold Temperature Optimum	30 °C
Min. mould temperature	30 °C
Max. mould temperature	40 °C

Extrusion

Drying Temperature	70 - 90 °C
Drying Time, Dehumidified Dryer	2 - 3 h
Processing Moisture Content	≤0.06 %
Melt Temperature Optimum	200 °C
Melt Temperature Range	190 - 205 °C

Characteristics

Processing	Injection Moulding, Film Extrusion, Extrusion, Sheet Extrusion, Other Extrusion, Coatable, Calendering, Casting, Thermoforming
Delivery form	Pellets
Special characteristics	Light stabilised or stable to light
Sustainability	Bio-Content

Hytrel® 3078 ECO-B 752

THERMOPLASTIC POLYESTER ELASTOMER

Additional information

Profile extrusion

PREPROCESSING

Drying temperature = 80 °C
Drying time, dehumidified dryer = 2-3 h
Processing moisture content = <0.06 %


PROCESSING

Melt temperature optimum = 200 °C
Melt temperature range = 190-205 °C

Viscosity-shear rate

Hytrel® 3078 ECO-B 752


THERMOPLASTIC POLYESTER ELASTOMER

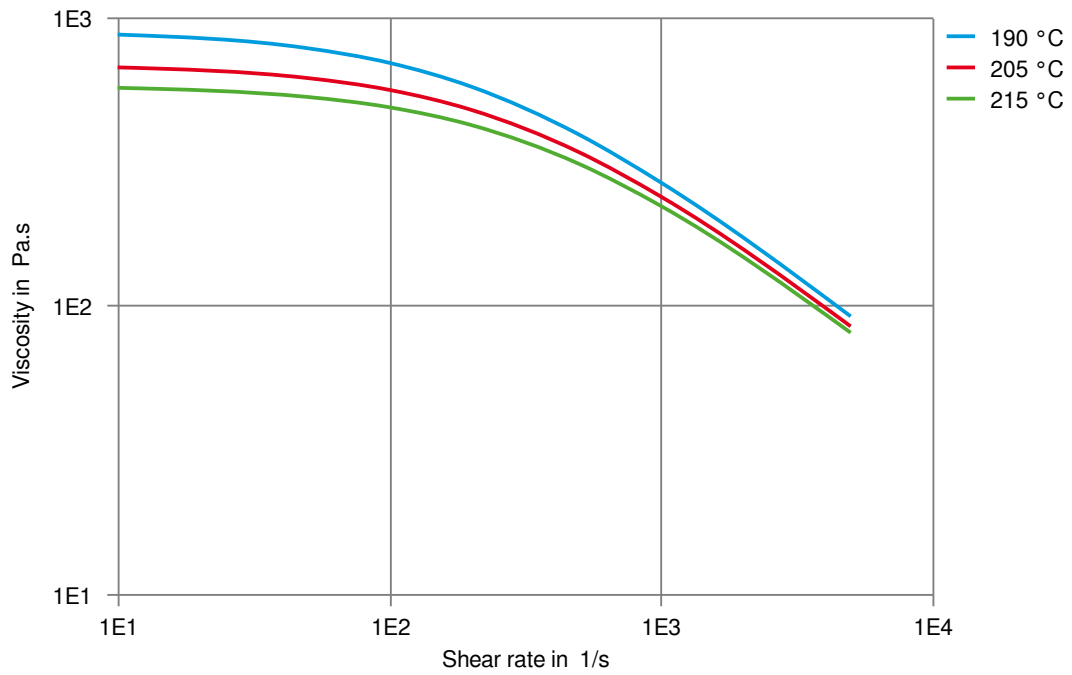

Hytrel® 3078 ECO-B 752

THERMOPLASTIC POLYESTER ELASTOMER


Shearstress-shear rate

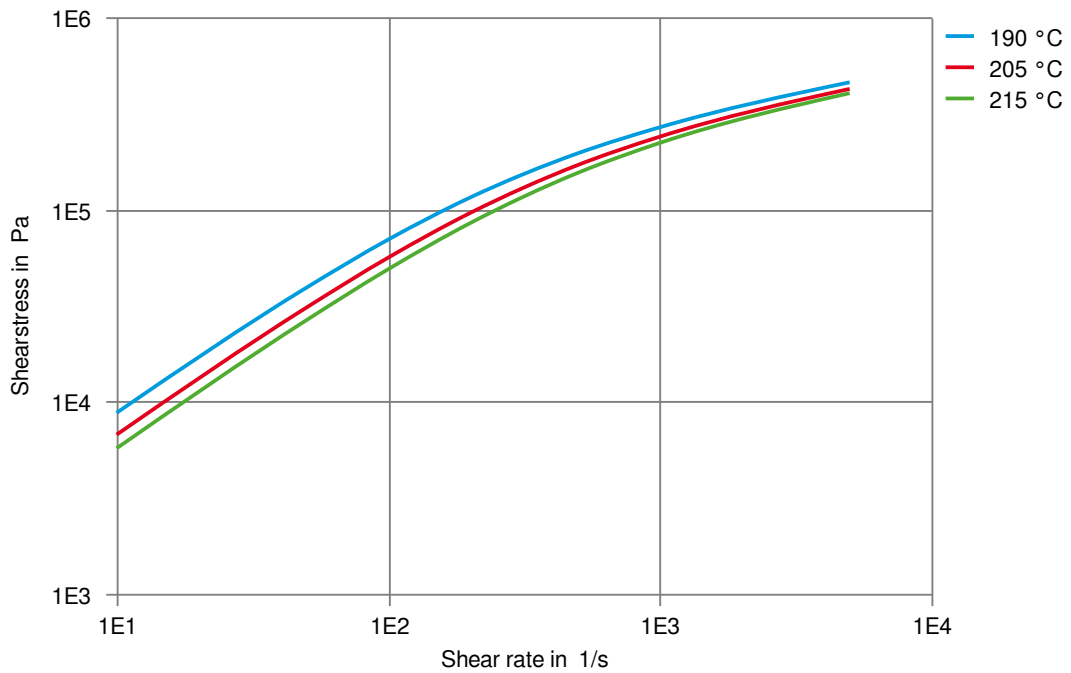

Hytrel® 3078 ECO-B 752

THERMOPLASTIC POLYESTER ELASTOMER


Stress-strain

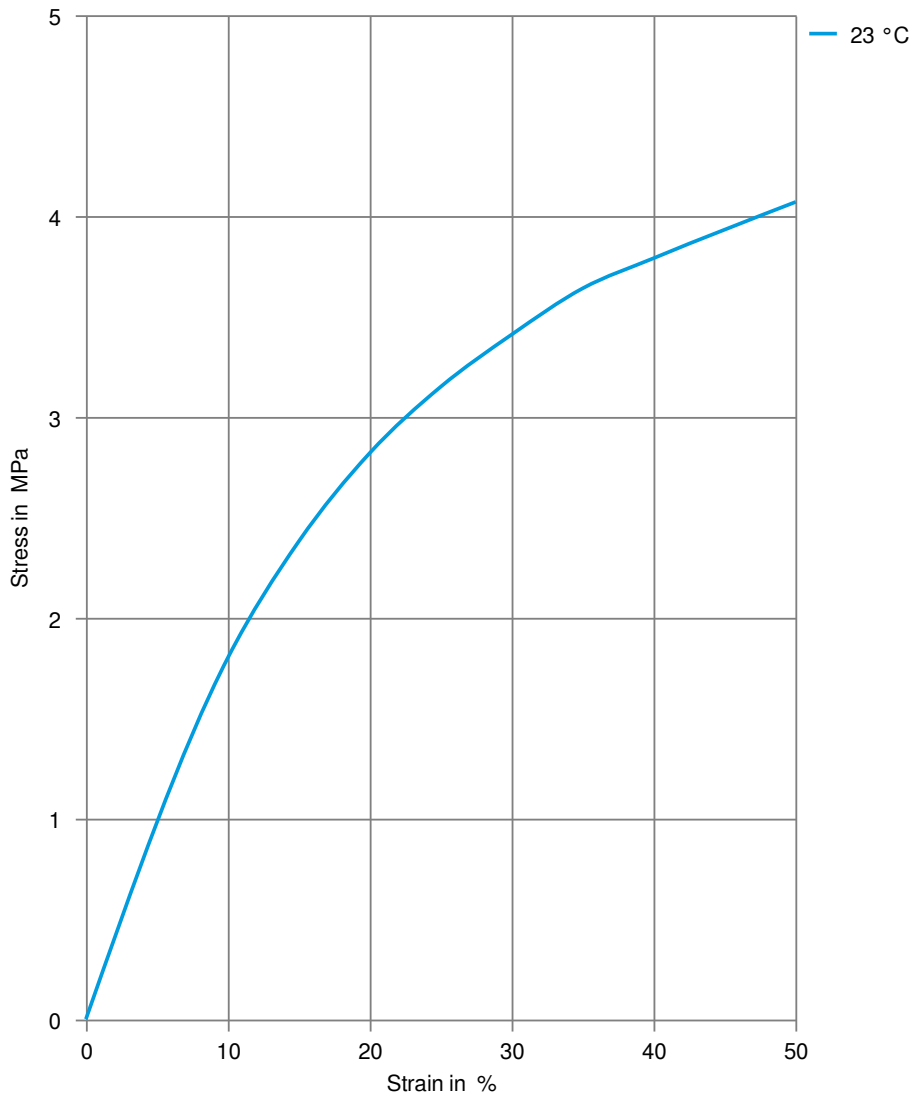

Hytrel® 3078 ECO-B 752

THERMOPLASTIC POLYESTER ELASTOMER


Secant modulus-strain

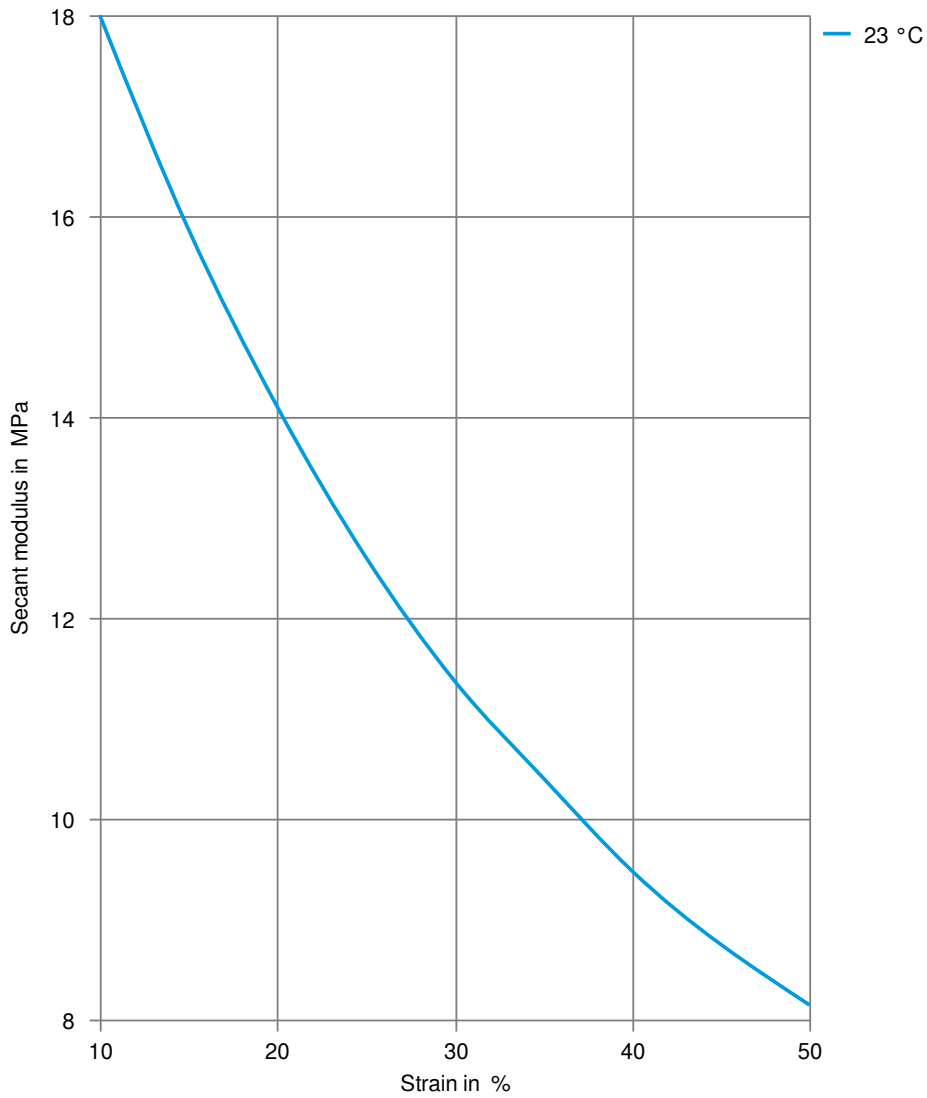

Hytrel® 3078 ECO-B 752

THERMOPLASTIC POLYESTER ELASTOMER

Stress-Strain (Flexible Materials)

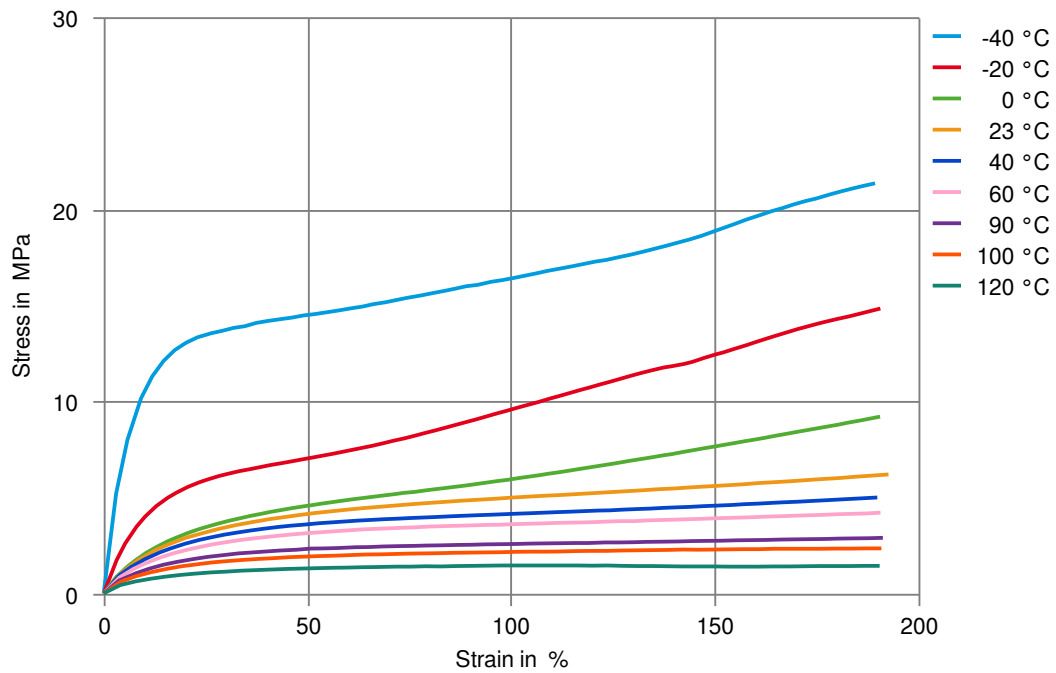

Hytrel® 3078 ECO-B 752

THERMOPLASTIC POLYESTER ELASTOMER

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass), 23°C
- ✓ Citric Acid solution (10% by mass), 23°C
- ✓ Lactic Acid (10% by mass), 23°C
- ✗ Hydrochloric Acid (36% by mass), 23°C
- ✗ Nitric Acid (40% by mass), 23°C
- ✗ Sulfuric Acid (38% by mass), 23°C
- ✓ Sulfuric Acid (5% by mass), 23°C
- ✗ Chromic Acid solution (40% by mass), 23°C

Bases

- ✓ Sodium Hydroxide solution (35% by mass), 23°C
- ✓ Sodium Hydroxide solution (1% by mass), 23°C
- ✓ Ammonium Hydroxide solution (10% by mass), 23°C

Alcohols

- ✓ Isopropyl alcohol, 23°C
- ✓ Methanol, 23°C
- ✓ Ethanol, 23°C

Hydrocarbons

- ✓ n-Hexane, 23°C
- ✓ Toluene, 23°C
- ✓ iso-Octane, 23°C

Ketones

- ✗ Acetone, 23°C

Ethers

- ✗ Diethyl ether, 23°C

Mineral oils

- ✓ SAE 10W40 multigrade motor oil, 23°C
- ✗ SAE 10W40 multigrade motor oil, 130°C
- ✗ SAE 80/90 hypoid-gear oil, 130°C
- ✓ Insulating Oil, 23°C

Standard Fuels

- ✗ ISO 1817 Liquid 1 - E5, 60°C
- ✗ ISO 1817 Liquid 2 - M15E4, 60°C
- ✗ ISO 1817 Liquid 3 - M3E7, 60°C
- ✗ ISO 1817 Liquid 4 - M15, 60°C
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C), 23°C
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 90°C
- ✗ Diesel fuel (pref. ISO 1817 Liquid F), >90°C

Salt solutions

- ✓ Sodium Chloride solution (10% by mass), 23°C
- ✗ Sodium Hypochlorite solution (10% by mass), 23°C

Hytrel® 3078 ECO-B 752

THERMOPLASTIC POLYESTER ELASTOMER

- ✓ Sodium Carbonate solution (20% by mass), 23 °C
- ✓ Sodium Carbonate solution (2% by mass), 23 °C
- ✓ Zinc Chloride solution (50% by mass), 23 °C

Other

- ✓ Ethyl Acetate, 23 °C
- ✗ Hydrogen peroxide, 23 °C
- ✗ DOT No. 4 Brake fluid, 130 °C
- ✗ Ethylene Glycol (50% by mass) in water, 108 °C
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water, 23 °C
- ✓ 50% Oleic acid + 50% Olive Oil, 23 °C
- ✓ Water, 23 °C
- ✓ Water, 90 °C
- ✓ Phenol solution (5% by mass), 23 °C

Symbols used:

- ✓ possibly resistant
Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).
- ✗ not recommended - see explanation
Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).