

Hytrel® G5544

THERMOPLASTIC POLYESTER ELASTOMER

Common features of Hytrel® thermoplastic polyester elastomer include mechanical and physical properties such as exceptional toughness and resilience, high resistance to creep, impact and flex fatigue, flexibility at low temperatures and good retention of properties at elevated temperatures. In addition, it resists many industrial chemicals, oils and solvents. Special grades include heat stabilised, flame retardant, food contact compliant, blow molding and extrusion grades. Concentrates offered include black pigments, UV protection additives, heat stabilisers, and flame retardants. Hytrel® thermoplastic polyester elastomer is plasticiser free.

The good melt stability of Hytrel® thermoplastic polyester elastomer normally enables the recycling of properly handled production waste. If recycling is not possible, we recommend, as the preferred option, incineration with energy recovery (-24 kJ/g of base polymer) in appropriately equipped installations.

For disposal, local regulations have to be observed.

Hytrel® thermoplastic polyester elastomer typically is used in demanding applications in the automotive, fluid power, electrical/electronic, consumer goods, appliance and power tool, sporting goods, furniture, industrial and off-road transportation/equipment industry.

Hytrel® G5544 is a medium modulus grade with nominal hardness of 55D. It contains discoloring stabilizer. It can be processed by many conventional thermoplastic processing techniques like injection molding and extrusion.

Typical applications:

Hose and tubing, profiles, moulded and extruded consumer products. Not suited for light-colored finished products.

Product information

| | | |
|----------------------|----------|-----------|
| Resin Identification | TPC-ET | ISO 1043 |
| Part Marking Code | >TPC-ET< | ISO 11469 |

Rheological properties

| | | |
|----------------------------------|---------------------------|-----------------|
| Melt volume-flow rate | 10 cm ³ /10min | ISO 1133 |
| Temperature | 230 °C | |
| Load | 2.16 kg | |
| Melt mass-flow rate | 10 g/10min | ISO 1133 |
| Melt mass-flow rate, Temperature | 230 °C | |
| Melt mass-flow rate, Load | 2.16 kg | |
| Moulding shrinkage, parallel | 1.6 % | ISO 294-4, 2577 |
| Moulding shrinkage, normal | 1.6 % | ISO 294-4, 2577 |

Typical mechanical properties

| | | |
|-----------------------------------|---------------------|--------------|
| Tensile modulus | 200 MPa | ISO 527-1/-2 |
| Stress at 5% strain | 8.1 MPa | ISO 527-1/-2 |
| Stress at 10% strain | 11 MPa | ISO 527-1/-2 |
| Tensile stress at 50% strain, 1BA | 9 MPa | ISO 527-1/-2 |
| Tensile stress at break | 33 MPa | ISO 527-1/-2 |
| Nominal strain at break | 290 % | ISO 527-1/-2 |
| Tensile strain at break | >300 % | ISO 527-1/-2 |
| Flexural modulus | 190 MPa | ISO 178 |
| Shear Modulus | 65 MPa | ISO 6721 |
| Tensile creep modulus, 1h | 110 MPa | ISO 899-1 |
| Tensile creep modulus, 1000h | 85 MPa | ISO 899-1 |
| Charpy impact strength, 23°C | N kJ/m ² | ISO 179/1eU |

Hytrel® G5544

THERMOPLASTIC POLYESTER ELASTOMER

| | | |
|--|-------------------------------------|--------------------|
| Charpy notched impact strength, 23 °C | 90 ^[P] kJ/m ² | ISO 179/1eA |
| Charpy notched impact strength, -30 °C | 45 kJ/m ² | ISO 179/1eA |
| Charpy notched impact strength, -40 °C | 14 kJ/m ² | ISO 179/1eA |
| Tensile notched impact strength, 23 °C | 285 kJ/m ² | ISO 8256/1 |
| Izod notched impact strength, 23 °C | 64 kJ/m ² | ISO 180/1A |
| Izod notched impact strength, -40 °C | 27.0 kJ/m ² | ISO 180/1A |
| Brittleness temperature | -61 °C | ISO 974 |
| Shore D hardness, 15s | 52 | ISO 48-4 / ISO 868 |
| Shore D hardness, max | 56 | ISO 868 |
| Tear strength, parallel | 120 kN/m | ISO 34-1 |
| Tear strength, normal | 140 kN/m | ISO 34-1 |

[P]: Partial Break

Thermal properties

| | | |
|--|---------------------------|----------------|
| Melting temperature, 10 °C/min | 214 °C | ISO 11357-1/-3 |
| Glass transition temperature, 10 °C/min | -35 °C | ISO 11357-1/-3 |
| Temperature of deflection under load, 0.45 MPa | 77 °C | ISO 75-1/-2 |
| Vicat softening temperature, 50 °C/h 10N | 190 °C | ISO 306 |
| Coeff. of linear therm. expansion, parallel, -40-23 °C | 190 E-6/K | ISO 11359-1/-2 |
| Coefficient of linear thermal expansion (CLTE), parallel | 210 E-6/K | ISO 11359-1/-2 |
| Coeff. of linear therm. expansion, normal, -40-23 °C | 160 E-6/K | ISO 11359-1/-2 |
| Coefficient of linear thermal expansion (CLTE), normal | 180 E-6/K | ISO 11359-1/-2 |
| Thermal conductivity of melt | 0.15 W/(m K) | ISO 22007-2 |
| Effective thermal diffusivity, flow | 5.44E-8 m ² /s | ISO 22007-4 |
| Specific heat capacity of melt | 2110 J/(kg K) | ISO 22007-4 |
| RTI, electrical, 0.75mm | 50 °C | UL 746B |
| RTI, electrical, 1.5mm | 50 °C | UL 746B |
| RTI, electrical, 3.0mm | 50 °C | UL 746B |
| RTI, impact, 0.75mm | 50 °C | UL 746B |
| RTI, impact, 1.5mm | 50 °C | UL 746B |
| RTI, impact, 3.0mm | 50 °C | UL 746B |
| RTI, strength, 0.75mm | 50 °C | UL 746B |
| RTI, strength, 1.5mm | 50 °C | UL 746B |
| RTI, strength, 3.0mm | 50 °C | UL 746B |
| TGA curve | available | ISO 11359-1/-2 |

Flammability

| | | |
|--------------------------------------|-----------|----------------------|
| Burning Behav. at 1.5mm nom. thickn. | HB class | IEC 60695-11-10 |
| Thickness tested | 1.5 mm | IEC 60695-11-10 |
| UL recognition | yes | UL 94 |
| Burning Behav. at thickness h | HB class | IEC 60695-11-10 |
| Thickness tested | 3 mm | IEC 60695-11-10 |
| UL recognition | yes | UL 94 |
| Oxygen index | 19 % | ISO 4589-1/-2 |
| FMVSS Class | B | ISO 3795 (FMVSS 302) |
| Burning rate, Thickness 1 mm | 25 mm/min | ISO 3795 (FMVSS 302) |

Hytrel® G5544

THERMOPLASTIC POLYESTER ELASTOMER

Electrical properties

| | | |
|-----------------------------------|--------------------|---------------|
| Relative permittivity, 100Hz | 5 | IEC 62631-2-1 |
| Relative permittivity, 1MHz | 4.5 | IEC 62631-2-1 |
| Dissipation factor, 100Hz | 200 E-4 | IEC 62631-2-1 |
| Dissipation factor, 1MHz | 400 E-4 | IEC 62631-2-1 |
| Volume resistivity | 3E10 Ohm.m | IEC 62631-3-1 |
| Surface resistivity | 1E14 Ohm | IEC 62631-3-2 |
| Electric strength | 19 kV/mm | IEC 60243-1 |
| Comparative tracking index | 600 ^[1] | IEC 60112 |
| Comparative tracking index, 3.0mm | 0 PLC | UL 746A |

[1]: Thickness = 3.0mm

Physical/Other properties

| | | |
|---------------------------------|------------------------|----------------|
| Humidity absorption, 2mm | 0.4 % | Sim. to ISO 62 |
| Water absorption, 2mm | 2.2 % | Sim. to ISO 62 |
| Water absorption, Immersion 24h | 1.6 % | Sim. to ISO 62 |
| Density | 1220 kg/m ³ | ISO 1183 |
| Density of melt | 1050 kg/m ³ | |

VDA Properties

| | | |
|-------------------------------|----------|----------|
| Emission of organic compounds | 26 µgC/g | VDA 277 |
| Odour | 3 class | VDA 270 |
| Fogging, G-value (condensate) | 0.1 mg | ISO 6452 |

Injection

| | |
|---------------------------------|---------|
| Drying Recommended | yes |
| Drying Temperature | 100 °C |
| Drying Time, Dehumidified Dryer | 2 - 3 h |
| Processing Moisture Content | ≤0.08 % |
| Melt Temperature Optimum | 240 °C |
| Min. melt temperature | 235 °C |
| Max. melt temperature | 260 °C |
| Mold Temperature Optimum | 45 °C |
| Min. mould temperature | 25 °C |
| Max. mould temperature | 50 °C |
| Ejection temperature | 144 °C |

Extrusion

| | |
|---------------------------------|--------------|
| Drying Temperature | 100 °C |
| Drying Time, Dehumidified Dryer | 2 - 3 h |
| Processing Moisture Content | ≤0.06 % |
| Melt Temperature Optimum | 230 °C |
| Melt Temperature Range | 230 - 245 °C |

Hytrel® G5544

THERMOPLASTIC POLYESTER ELASTOMER

Characteristics

| | |
|-------------------------|---|
| Processing | Injection Moulding, Film Extrusion, Extrusion, Sheet Extrusion, Other Extrusion, Casting, Thermoforming |
| Delivery form | Pellets |
| Special characteristics | Heat stabilised or stable to heat |


Automotive

| OEM | STANDARD | ADDITIONAL INFORMATION |
|-----------------------|--|--|
| Renault-Nissan | EP04, No Spec, Special Part Approval, See Your CE Account Manager. | |
| Stellantis - Chrysler | MS-DB-448 / CPN-3041 | Natural |
| Stellantis - Chrysler | MS-DB-448 / CPN-3356 | Black |
| Stellantis - Chrysler | MS-DB-448 / CPN-4038 | Blended with DX9 Color Match Concentrate |
| VW Group | VW 50123 | |

Hytrel® G5544

THERMOPLASTIC POLYESTER ELASTOMER


Viscosity-shear rate

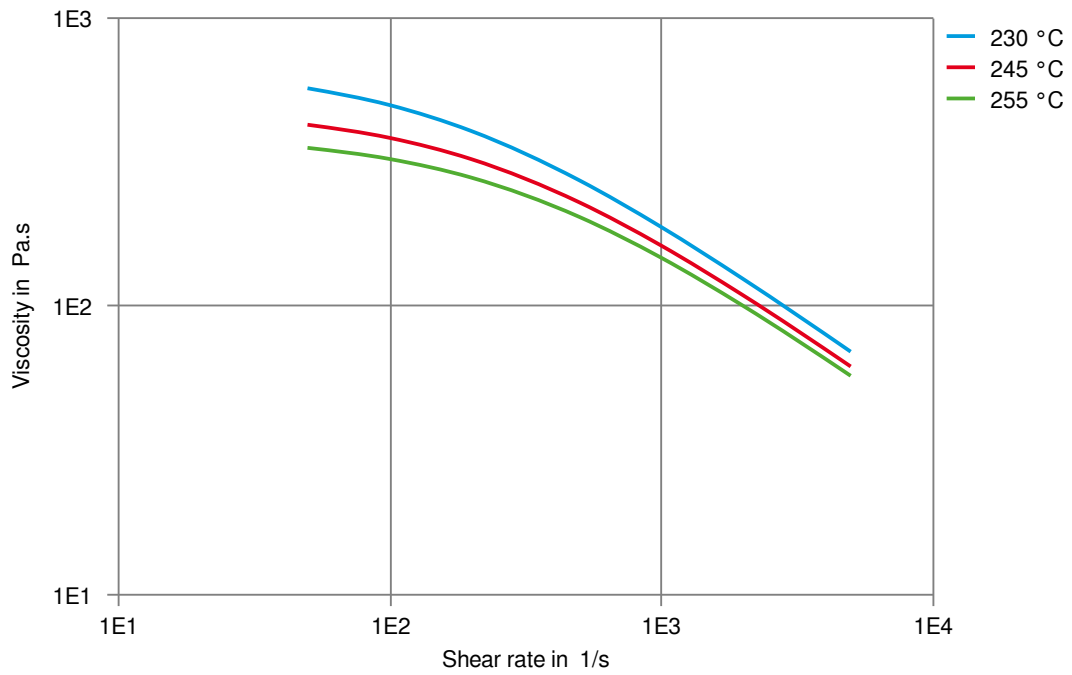

Hytrel® G5544

THERMOPLASTIC POLYESTER ELASTOMER


Shearstress-shear rate

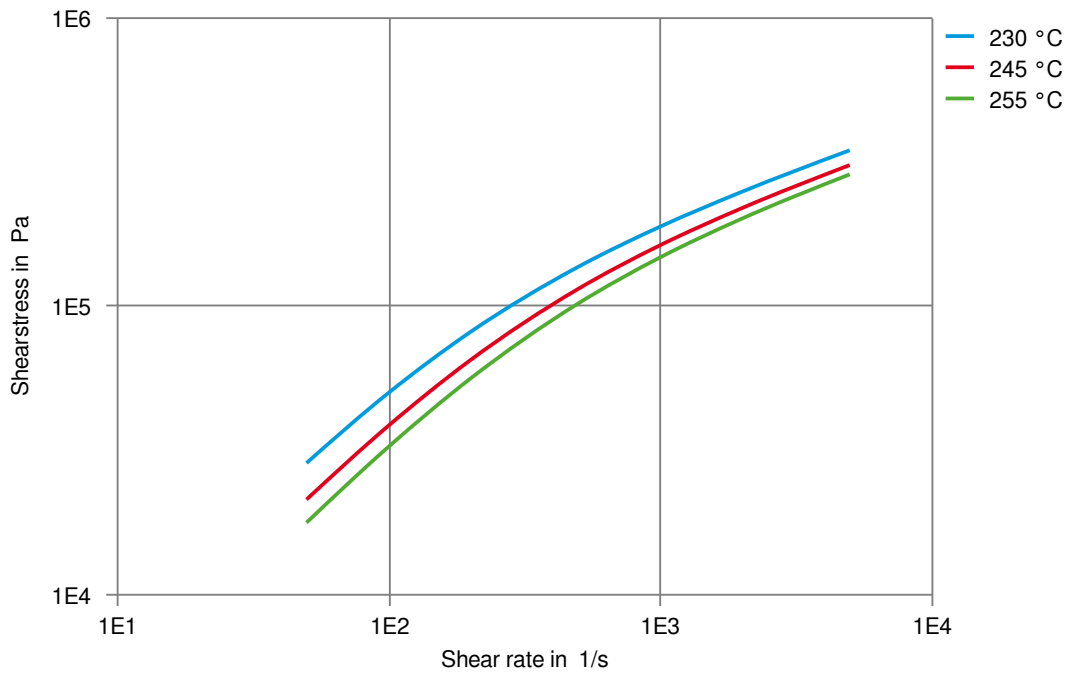

Hytrel® G5544

THERMOPLASTIC POLYESTER ELASTOMER


Stress-strain

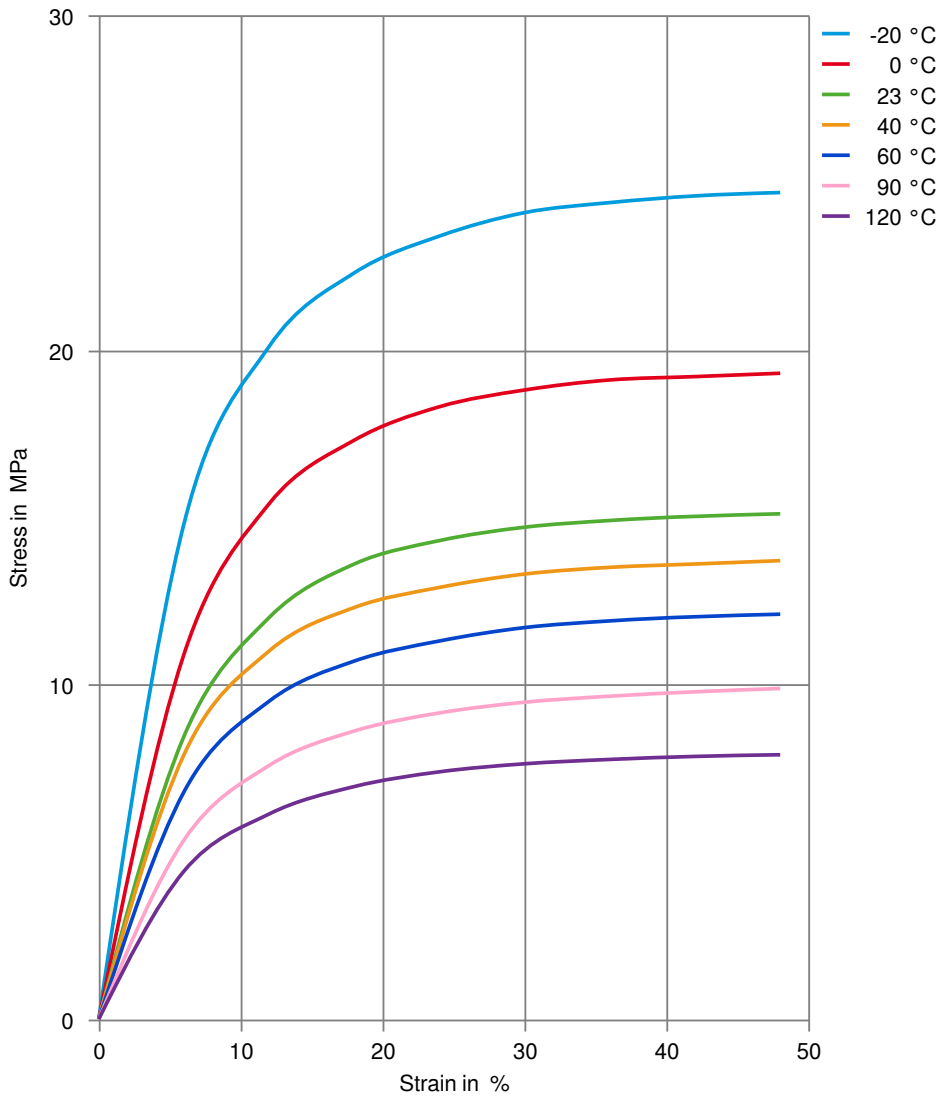

Hytrel® G5544

THERMOPLASTIC POLYESTER ELASTOMER


Secant modulus-strain

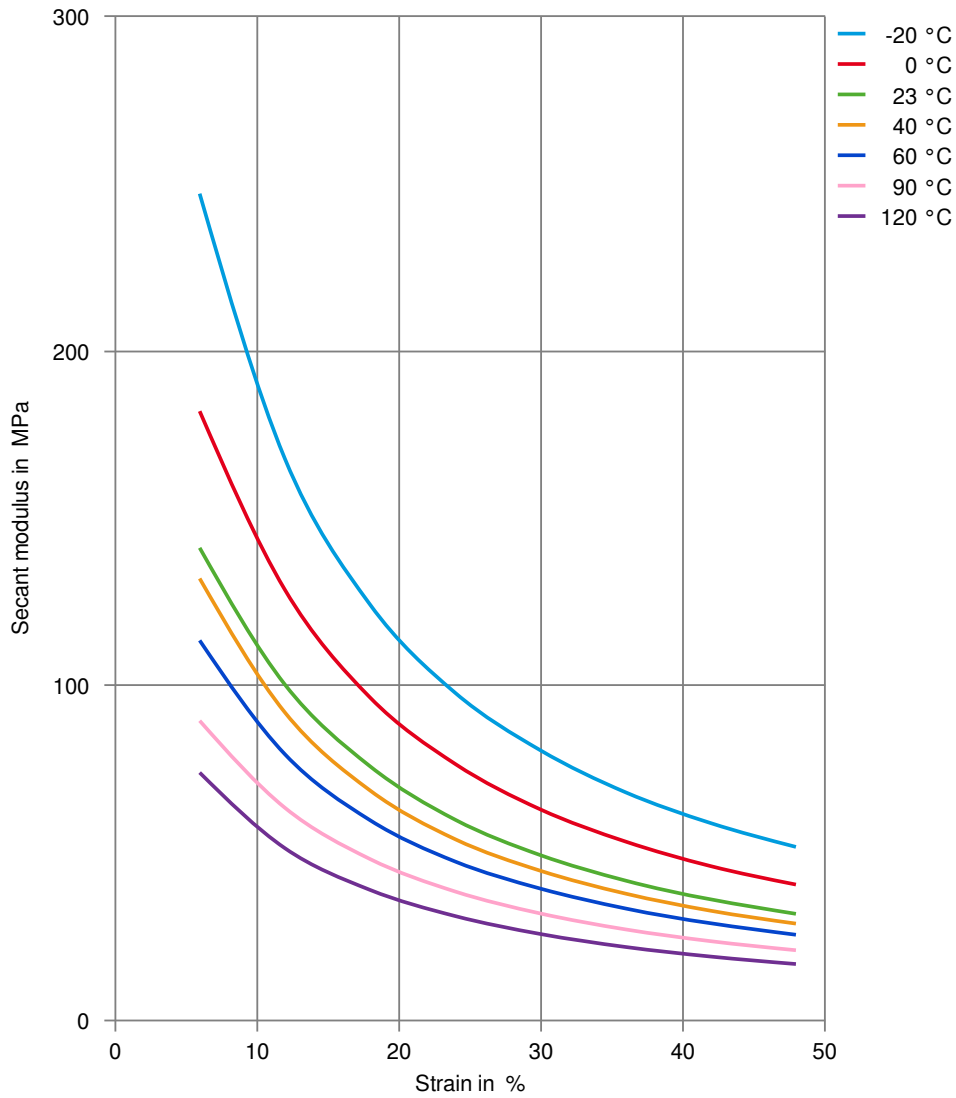

Hytrel® G5544

THERMOPLASTIC POLYESTER ELASTOMER


Stress-strain (isochronous) 23°C

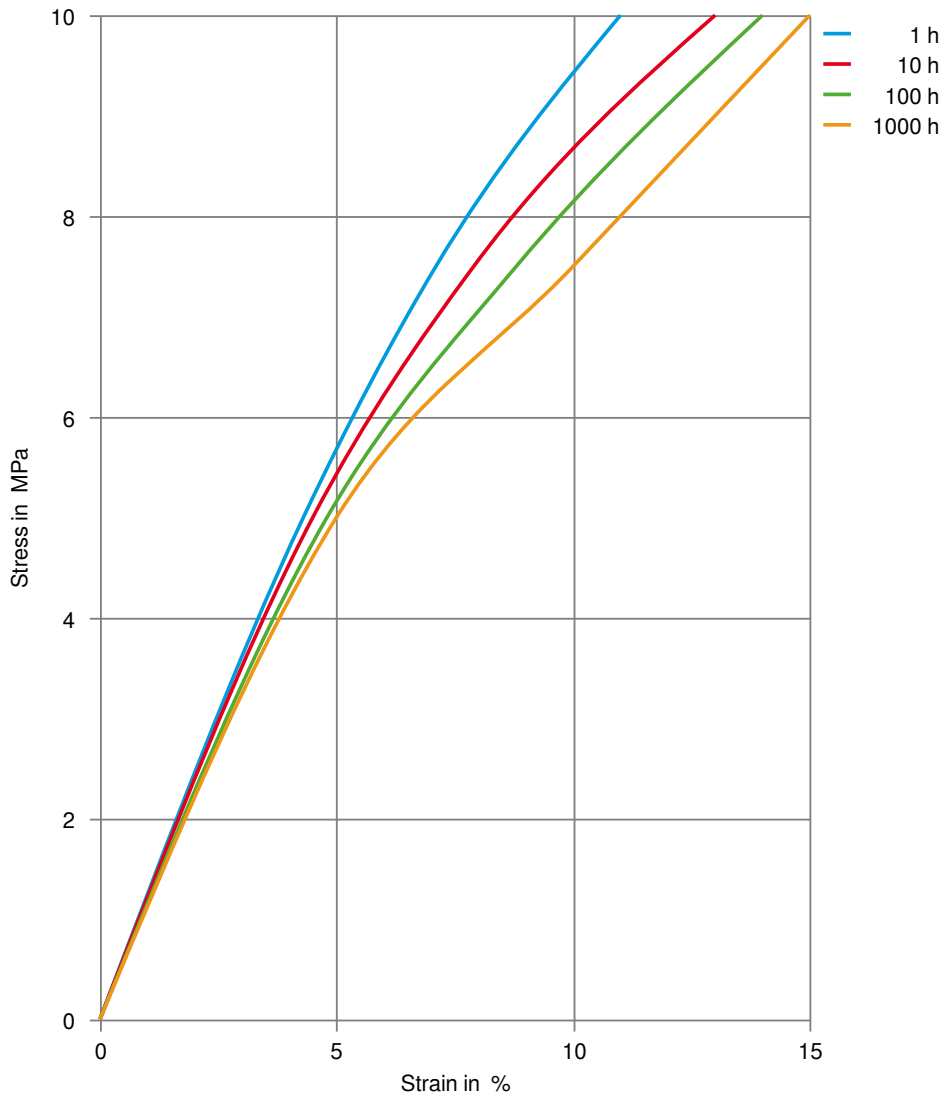

Hytrel® G5544

THERMOPLASTIC POLYESTER ELASTOMER


Creep modulus-time 23°C

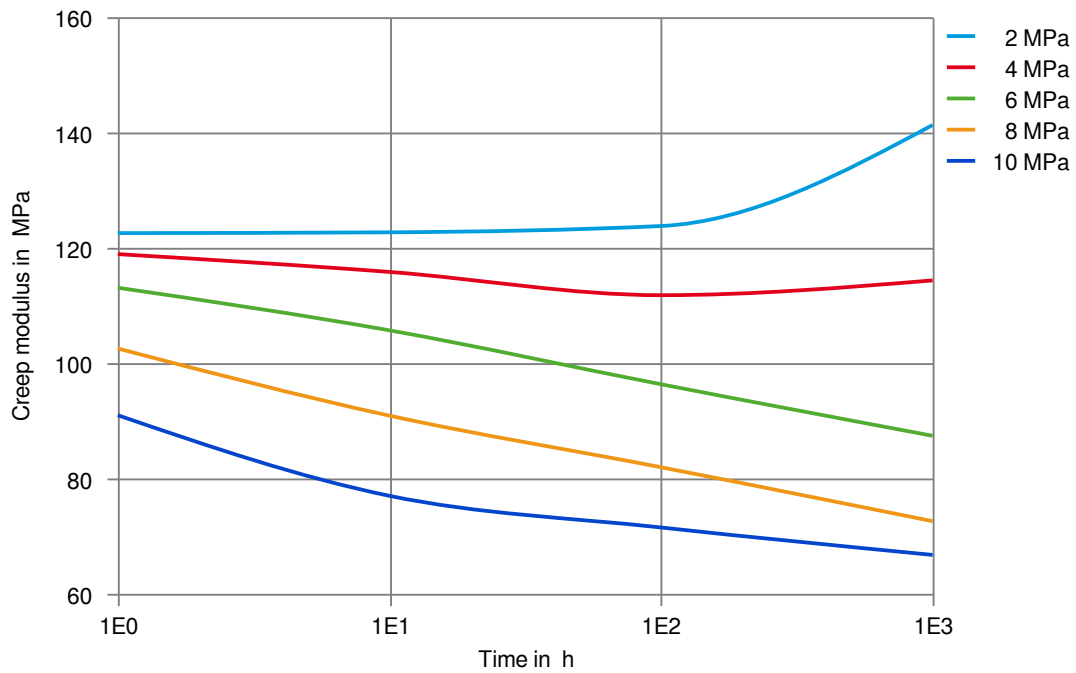

Hytrel® G5544

THERMOPLASTIC POLYESTER ELASTOMER


Stress-strain (isochronous) 40°C

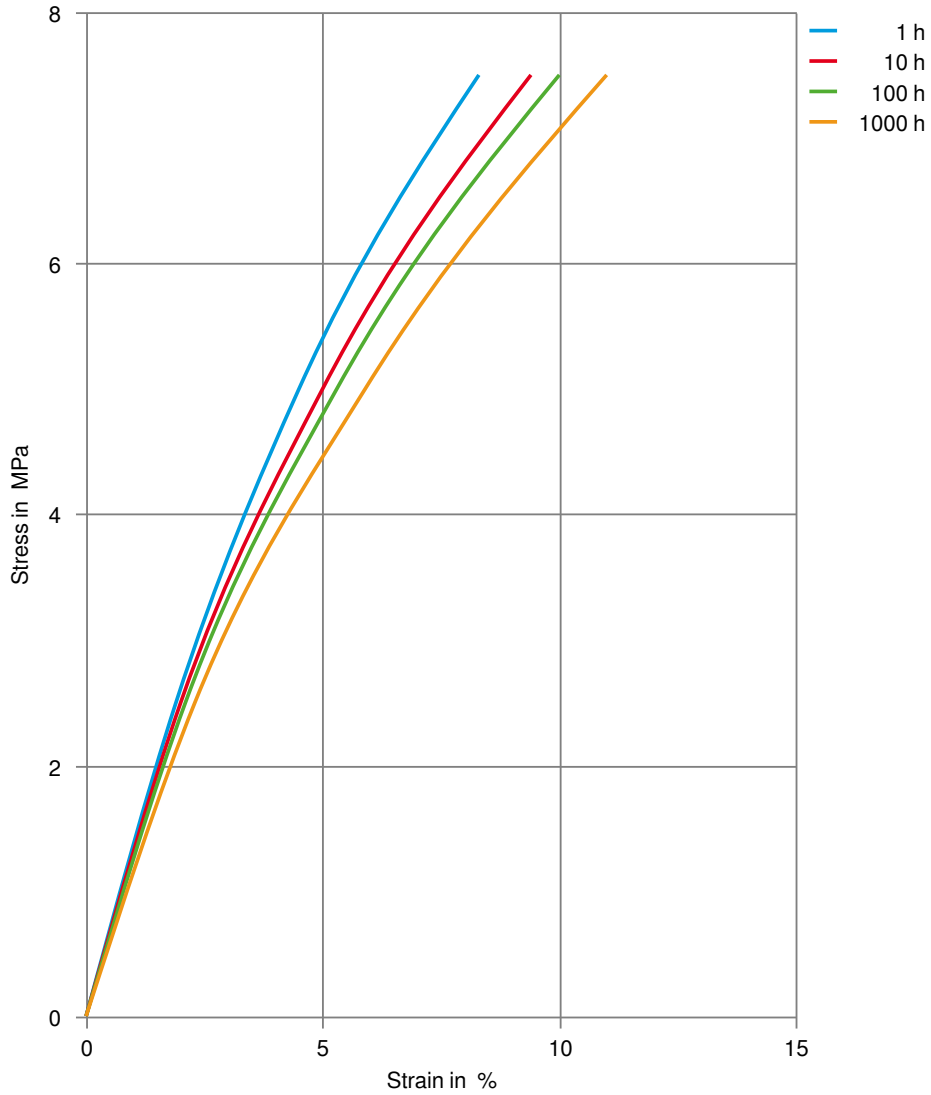

Hytrel® G5544

THERMOPLASTIC POLYESTER ELASTOMER


Creep modulus-time 40°C

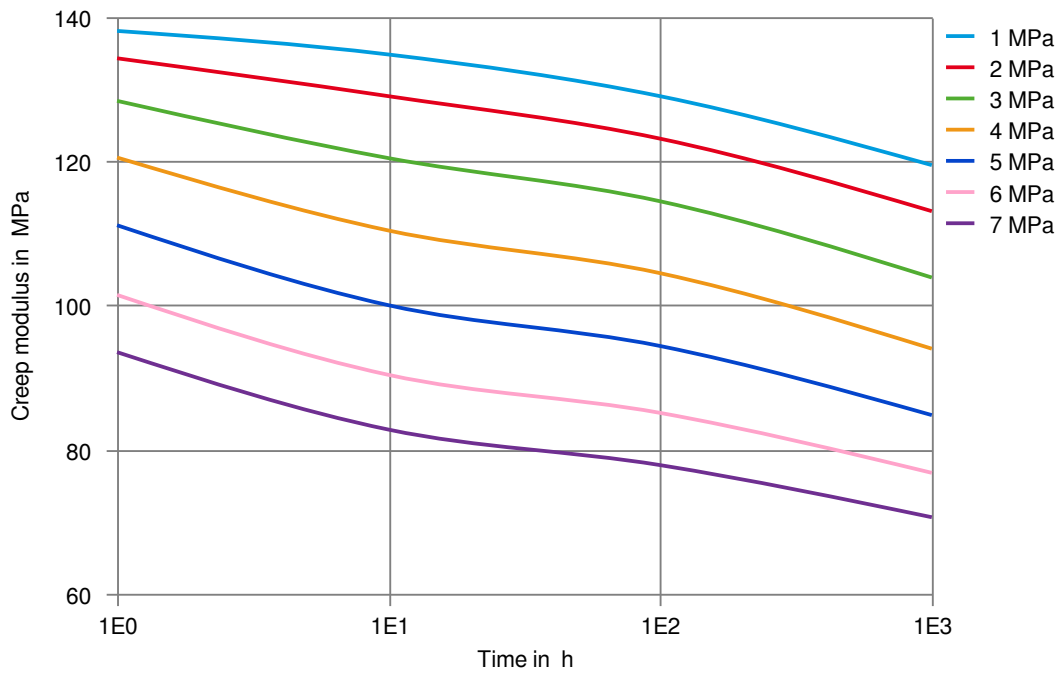

Hytrel® G5544

THERMOPLASTIC POLYESTER ELASTOMER

Stress-Strain (Flexible Materials)

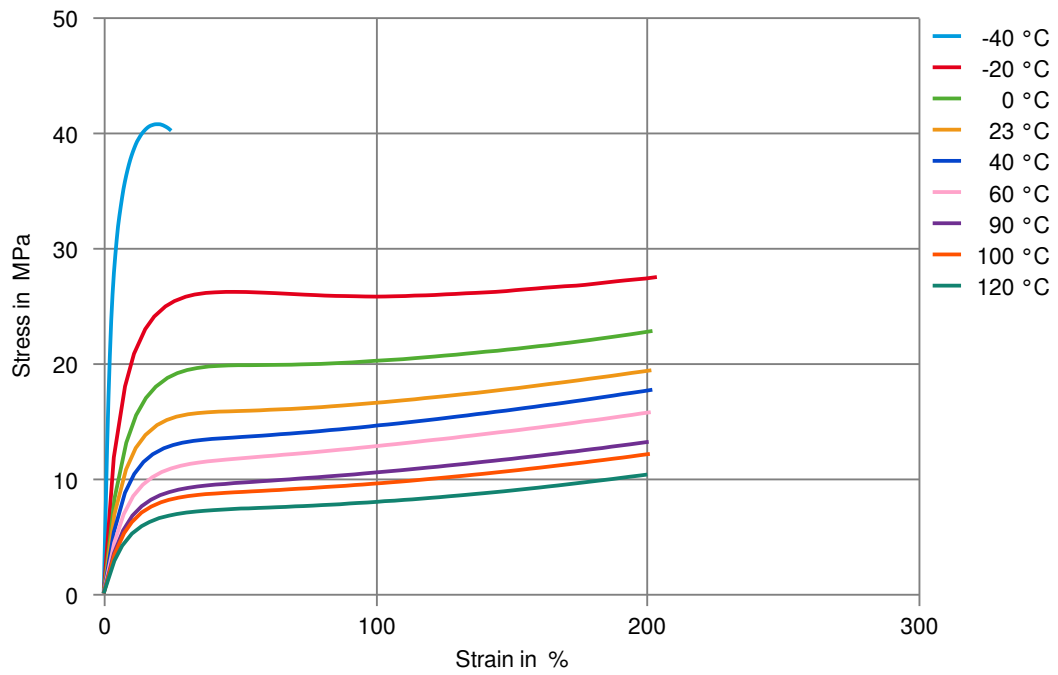

Hytrel® G5544

THERMOPLASTIC POLYESTER ELASTOMER

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass), 23°C
- ✓ Citric Acid solution (10% by mass), 23°C
- ✓ Lactic Acid (10% by mass), 23°C
- ✗ Hydrochloric Acid (36% by mass), 23°C
- ✗ Nitric Acid (40% by mass), 23°C
- ✗ Sulfuric Acid (38% by mass), 23°C
- ✓ Sulfuric Acid (5% by mass), 23°C
- ✗ Chromic Acid solution (40% by mass), 23°C

Bases

- ✗ Sodium Hydroxide solution (35% by mass), 23°C
- ✓ Sodium Hydroxide solution (1% by mass), 23°C
- ✓ Ammonium Hydroxide solution (10% by mass), 23°C

Alcohols

- ✓ Isopropyl alcohol, 23°C
- ✓ Methanol, 23°C
- ✗ Ethanol, 23°C

Hydrocarbons

- ✓ n-Hexane, 23°C
- ✓ Toluene, 23°C
- ✓ iso-Octane, 23°C

Ketones

- ✗ Acetone, 23°C

Ethers

- ✗ Diethyl ether, 23°C

Mineral oils

- ✓ SAE 10W40 multigrade motor oil, 23°C
- ✗ SAE 10W40 multigrade motor oil, 130°C
- ✗ SAE 80/90 hypoid-gear oil, 130°C
- ✓ Insulating Oil, 23°C

Standard Fuels

- ✗ ISO 1817 Liquid 1 - E5, 60°C
- ✗ ISO 1817 Liquid 2 - M15E4, 60°C
- ✗ ISO 1817 Liquid 3 - M3E7, 60°C
- ✗ ISO 1817 Liquid 4 - M15, 60°C
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C), 23°C
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 90°C
- ✗ Diesel fuel (pref. ISO 1817 Liquid F), >90°C

Salt solutions

- ✓ Sodium Chloride solution (10% by mass), 23°C
- ✗ Sodium Hypochlorite solution (10% by mass), 23°C

Hytrel® G5544

THERMOPLASTIC POLYESTER ELASTOMER

- ✓ Sodium Carbonate solution (20% by mass), 23 °C
- ✓ Sodium Carbonate solution (2% by mass), 23 °C
- ✓ Zinc Chloride solution (50% by mass), 23 °C

Other

- ✓ Ethyl Acetate, 23 °C
- ✗ Hydrogen peroxide, 23 °C
- ✗ DOT No. 4 Brake fluid, 130 °C
- ✗ Ethylene Glycol (50% by mass) in water, 108 °C
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water, 23 °C
- ✓ 50% Oleic acid + 50% Olive Oil, 23 °C
- ✓ Water, 23 °C
- ✗ Water, 90 °C
- ✓ Phenol solution (5% by mass), 23 °C

Symbols used:

- ✓ possibly resistant
Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).
- ✗ not recommended - see explanation
Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).