

# Hytrel® HTR8241

## THERMOPLASTIC POLYESTER ELASTOMER

Hytrel® HTR8241 is a 65 Shore D High Performance Polyester Elastomer Developed for Extrusion

### Product information

Resin Identification	TPC-ET	ISO 1043
Part Marking Code	>TPC-ET<	ISO 11469

### Rheological properties

Melt volume-flow rate	5 cm <sup>3</sup> /10min	ISO 1133
Temperature	230 °C	
Load	2.16 kg	
Moulding shrinkage, parallel	1.7 %	ISO 294-4, 2577
Moulding shrinkage, normal	1.6 %	ISO 294-4, 2577

### Typical mechanical properties

Tensile modulus	360 MPa	ISO 527-1/-2
Tensile stress at yield	22 MPa	ISO 527-1/-2
Tensile strain at yield	29 %	ISO 527-1/-2
Stress at 5% strain	12.5 MPa	ISO 527-1/-2
Stress at 10% strain	18 MPa	ISO 527-1/-2
Tensile stress at 50% strain, 1BA	21 MPa	ISO 527-1/-2
Tensile stress at break	45 MPa	ISO 527-1/-2
Nominal strain at break	490 %	ISO 527-1/-2
Tensile strain at break	>300 %	ISO 527-1/-2
Flexural modulus	360 MPa	ISO 178
Charpy impact strength, 23°C	N kJ/m <sup>2</sup>	ISO 179/1eU
Charpy impact strength, -30°C	N kJ/m <sup>2</sup>	ISO 179/1eU
Charpy notched impact strength, 23°C	N kJ/m <sup>2</sup>	ISO 179/1eA
Charpy notched impact strength, -30°C	14 kJ/m <sup>2</sup>	ISO 179/1eA
Charpy notched impact strength, -40°C	10 kJ/m <sup>2</sup>	ISO 179/1eA
Izod notched impact strength, -40°C	9.0 kJ/m <sup>2</sup>	ISO 180/1A
Poisson's ratio	0.48	
Shore D hardness, 15s	60	ISO 48-4 / ISO 868
Shore D hardness, max	63	ISO 868
Tear strength, parallel	210 kN/m	ISO 34-1
Tear strength, normal	200 kN/m	ISO 34-1

### Thermal properties

Melting temperature, 10°C/min	211 °C	ISO 11357-1/-3
Temperature of deflection under load, 0.45 MPa	85 °C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 10N	198 °C	ISO 306
Coefficient of linear thermal expansion (CLTE), parallel	200 E-6/K	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), normal	200 E-6/K	ISO 11359-1/-2
Thermal conductivity of melt	0.15 W/(m K)	ISO 22007-2

# Hytrel® HTR8241

## THERMOPLASTIC POLYESTER ELASTOMER

Effective thermal diffusivity, flow	5.44E-8 m <sup>2</sup> /s	ISO 22007-4
Specific heat capacity of melt	2070 J/(kg K)	ISO 22007-4

### Flammability

FMVSS Class	B	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	<80 mm/min	ISO 3795 (FMVSS 302)

### Electrical properties

Dissipation factor, 100Hz	110 E-4	IEC 62631-2-1
Dissipation factor, 1MHz	110 E-4	IEC 62631-2-1
Volume resistivity	7E10 Ohm.m	IEC 62631-3-1
Surface resistivity	2E14 Ohm	IEC 62631-3-2
Electric strength	18 kV/mm	IEC 60243-1
Comparative tracking index	600	IEC 60112

### Physical/Other properties

Humidity absorption, 2mm	0.2 %	Sim. to ISO 62
Water absorption, 2mm	0.7 %	Sim. to ISO 62
Density	1240 kg/m <sup>3</sup>	ISO 1183
Density of melt	1070 kg/m <sup>3</sup>	

### Injection

Drying Recommended	yes
Drying Temperature	110 °C
Drying Time, Dehumidified Dryer	2 - 4 h
Processing Moisture Content	≤0.08 %
Melt Temperature Optimum	240 °C
Min. melt temperature	235 °C
Max. melt temperature	260 °C
Mold Temperature Optimum	45 °C
Min. mould temperature	35 °C
Max. mould temperature	46 °C
Ejection temperature	110 °C

### Extrusion

Drying Temperature	100 - 120 °C
Drying Time, Dehumidified Dryer	2 - 3 h
Processing Moisture Content	≤0.06 %
Melt Temperature Optimum	235 °C
Melt Temperature Range	225 - 240 °C

### Characteristics

Processing	Film Extrusion, Extrusion, Sheet Extrusion, Other Extrusion, Coatable, Casting
Delivery form	Pellets
Special characteristics	Light stabilised or stable to light

# Hytrel® HTR8241


## THERMOPLASTIC POLYESTER ELASTOMER

### Automotive

OEM  
Mercedes-Benz

STANDARD  
DBL5562 AA39 TPC


### Viscosity-shear rate

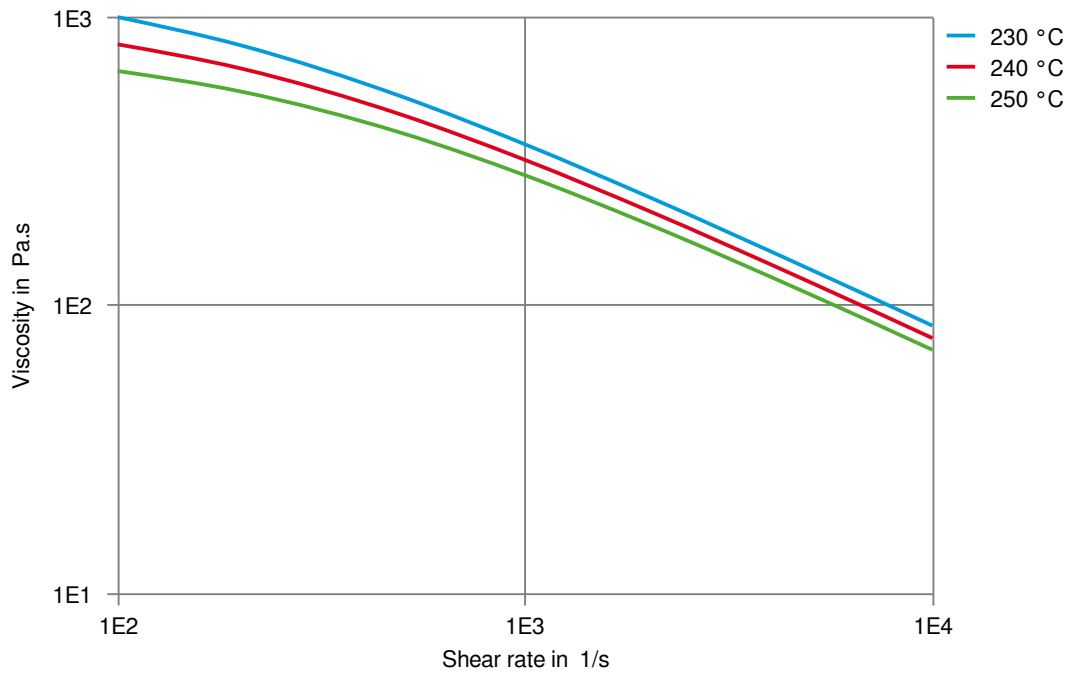

# Hytrel® HTR8241

THERMOPLASTIC POLYESTER ELASTOMER

## Shearstress-shear rate

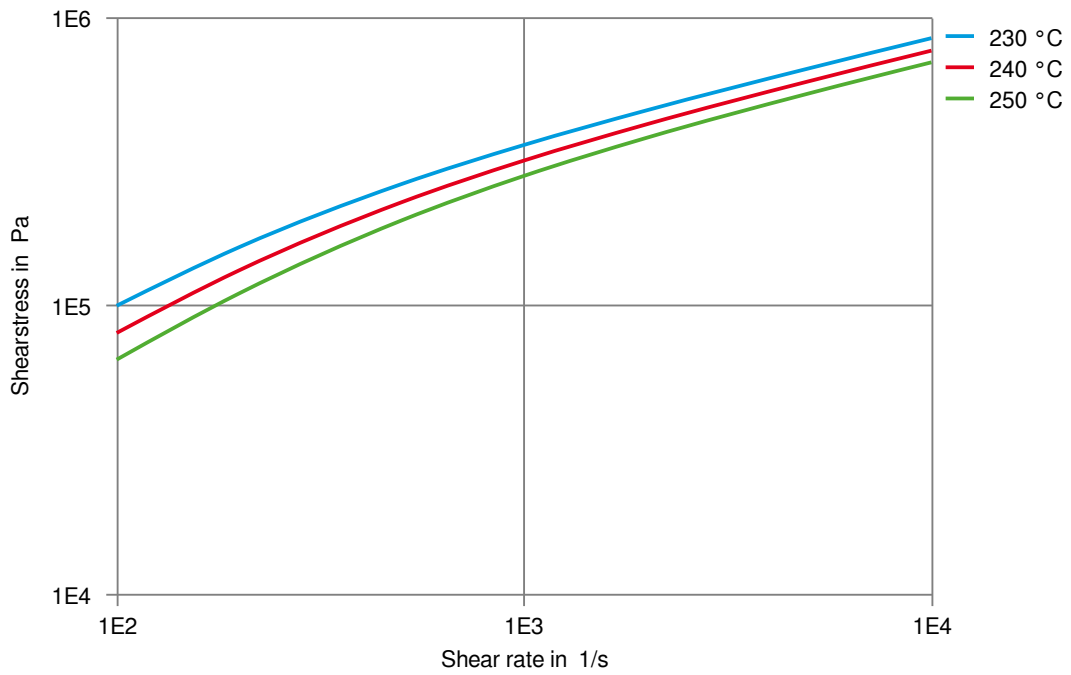

# Hytrel® HTR8241

## THERMOPLASTIC POLYESTER ELASTOMER

### Chemical Media Resistance

#### Acids

- ✓ Acetic Acid (5% by mass), 23°C
- ✓ Citric Acid solution (10% by mass), 23°C
- ✓ Lactic Acid (10% by mass), 23°C
- ✗ Hydrochloric Acid (36% by mass), 23°C
- ✗ Nitric Acid (40% by mass), 23°C
- ✗ Sulfuric Acid (38% by mass), 23°C
- ✓ Sulfuric Acid (5% by mass), 23°C
- ✗ Chromic Acid solution (40% by mass), 23°C

#### Bases

- ✓ Sodium Hydroxide solution (35% by mass), 23°C
- ✓ Sodium Hydroxide solution (1% by mass), 23°C
- ✓ Ammonium Hydroxide solution (10% by mass), 23°C

#### Alcohols

- ✓ Isopropyl alcohol, 23°C
- ✓ Methanol, 23°C
- ✓ Ethanol, 23°C

#### Hydrocarbons

- ✓ n-Hexane, 23°C
- ✓ Toluene, 23°C
- ✓ iso-Octane, 23°C

#### Ketones

- ✗ Acetone, 23°C

#### Ethers

- ✗ Diethyl ether, 23°C

#### Mineral oils

- ✓ SAE 10W40 multigrade motor oil, 23°C
- ✗ SAE 10W40 multigrade motor oil, 130°C
- ✗ SAE 80/90 hypoid-gear oil, 130°C
- ✓ Insulating Oil, 23°C

#### Standard Fuels

- ✗ ISO 1817 Liquid 1 - E5, 60°C
- ✗ ISO 1817 Liquid 2 - M15E4, 60°C
- ✗ ISO 1817 Liquid 3 - M3E7, 60°C
- ✗ ISO 1817 Liquid 4 - M15, 60°C
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C), 23°C
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 90°C
- ✗ Diesel fuel (pref. ISO 1817 Liquid F), >90°C

#### Salt solutions

- ✓ Sodium Chloride solution (10% by mass), 23°C
- ✗ Sodium Hypochlorite solution (10% by mass), 23°C

# Hytrel® HTR8241

## THERMOPLASTIC POLYESTER ELASTOMER

- ✓ Sodium Carbonate solution (20% by mass), 23 °C
- ✓ Sodium Carbonate solution (2% by mass), 23 °C
- ✓ Zinc Chloride solution (50% by mass), 23 °C

### Other

- ✓ Ethyl Acetate, 23 °C
- ✗ Hydrogen peroxide, 23 °C
- ✗ DOT No. 4 Brake fluid, 130 °C
- ✗ Ethylene Glycol (50% by mass) in water, 108 °C
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water, 23 °C
- ✓ 50% Oleic acid + 50% Olive Oil, 23 °C
- ✓ Water, 23 °C
- ✗ Water, 90 °C
- ✓ Phenol solution (5% by mass), 23 °C

### Symbols used:

- ✓ possibly resistant  
Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).
- ✗ not recommended - see explanation  
Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).