

GHR[®] 8110

HMW-PE powder grade
 HMW-PE powder grade for filtration, carbon block, melt processable

Product information

Average molecular weight	800000 g/mol	Margolies' equation
Average particle size, D50	120 µm	laser scattering

Rheological properties

Melt mass-flow rate	1.3 g/10min	ISO 1133
Melt mass-flow rate, Temperature	190 °C	
Melt mass-flow rate, Load	21.6 kg	
Viscosity number	600 cm ³ /g	ISO 307, 1157, 1628
Intrinsic viscosity	600	ISO 307, 1157, 1628

Typical mechanical properties

Tensile Modulus	1100 MPa	ISO 527-1/-2
Yield stress, 50mm/min	26 MPa	ISO 527-1/-2
Yield strain, 50mm/min	9 %	ISO 527-1/-2
Stress at 50% strain	18 MPa	ISO 527-1/-2
Stress at break, 50mm/min	35 MPa	ISO 527-1/-2
Nominal strain at break	650 %	ISO 527-1/-2
Elongational stress, 150/10	0.01 MPa	ISO 21304-2
Charpy double notched impact strength, 23°C	25 kJ/m ²	ISO 21304-2
Shore D hardness, 15s	63	ISO 48-4 / ISO 868

Tribological properties

Relative Wear (based on GUR 4120=100), sandslurry method	310	Internal
---	-----	----------

Thermal properties

Temp. of deflection under load, 1.8 MPa	41 °C	ISO 75-1/-2
Vicat softening temperature, 50°C/h, 50N	80 °C	ISO 306

Electrical properties

Volume resistivity	>1E12 Ohm.m	IEC 62631-3-1
Surface resistivity	>1E12 Ohm	IEC 62631-3-2

Other properties

Density	950 kg/m ³	ISO 1183
Bulk density	440 kg/m ³	ISO 60


GHR[®] 8110

Characteristics

Food contact

FDA 21 CFR

Stress-strain

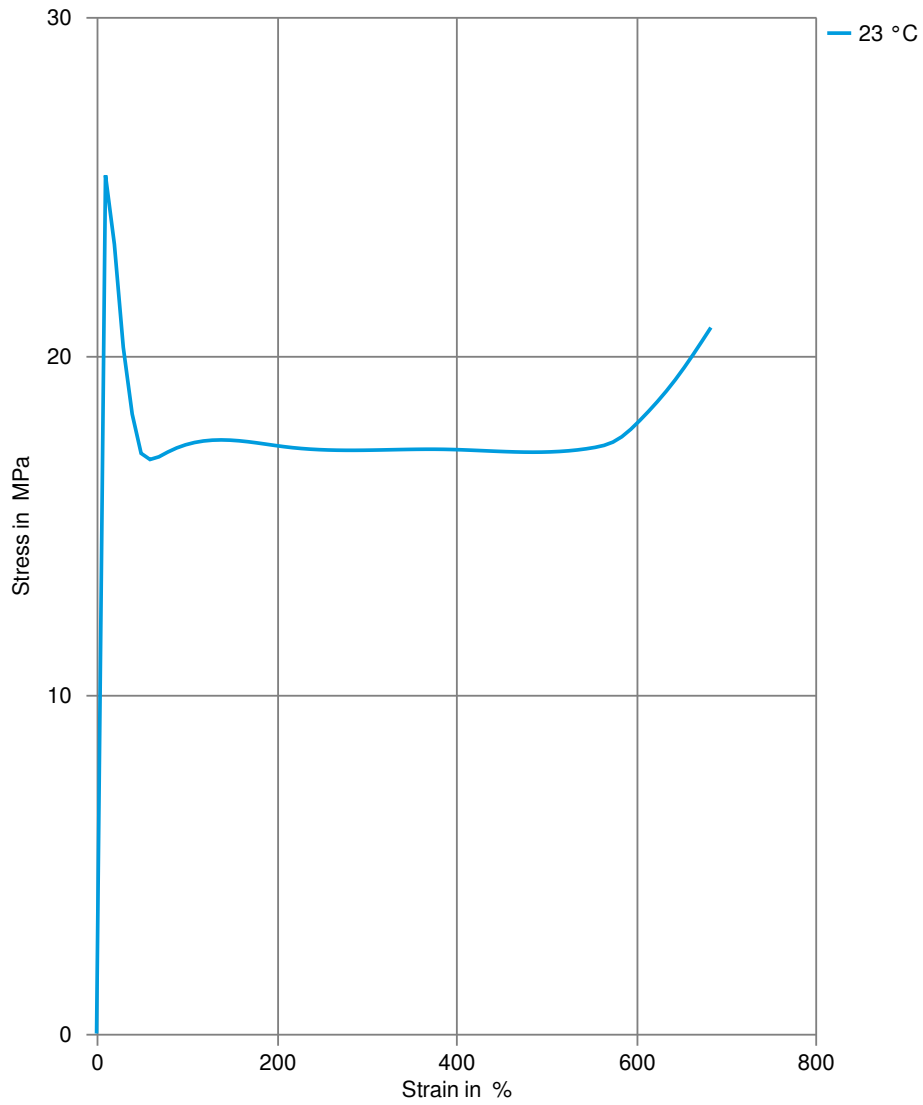

GHR[®] 8110

Secant modulus-strain

