

# GUR® 2122-5

GUR®

UHMW-PE powder grade: coarse particle, special particle morphology

## Product information

Resin Identification	(PE-UHMW)	ISO 1043
Part Marking Code	>(PE-UHMW)<	ISO 11469
Average molecular weight	4.2E6 g/mol	Margolies' equation
Average particle size, d50	200 µm	laser scattering

## Rheological properties

Viscosity number	2100 cm <sup>3</sup> /g	ISO 307, 1628
Intrinsic viscosity	1900	ISO 307, 1628

## Typical mechanical properties

Tensile modulus	730 MPa	ISO 527-1/-2
Tensile stress at yield, 50mm/min	20 MPa	ISO 527-1/-2
Tensile strain at yield, 50mm/min	15 %	ISO 527-1/-2
Tensile stress at 50% strain	20 MPa	ISO 527-1/-2
Tensile stress at break, 50mm/min	34 MPa	ISO 527-1/-2
Nominal strain at break	330 %	ISO 527-1/-2
Elongational stress F, 150/10	0.25 MPa	ISO 21304-2
Charpy double notched impact strength, 23°C	210 kJ/m <sup>2</sup>	ISO 21304-2
Poisson's ratio	0.46 <sup>[C]</sup>	
Shore D hardness, 15s	60	ISO 48-4 / ISO 868

[C]: Calculated

## Tribological properties

Wear by sandslurry method (based on GUR 4120=100)	100
--	-----

## Thermal properties

Temperature of deflection under load, 1.8 MPa	41 °C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 50N	80 °C	ISO 306

## Electrical properties

Volume resistivity	1E12 Ohm.m	IEC 62631-3-1
Surface resistivity	1E12 Ohm	IEC 62631-3-2

## Physical/Other properties

Density	930 kg/m <sup>3</sup>	ISO 1183
Bulk density	220 kg/m <sup>3</sup>	ISO 60


## Characteristics

Processing	Porous Sintering
Delivery form	Powder
Special characteristics	High impact or impact modified, Hydrolysis resistant, Low wear / Low friction, Chemical resistant

# GUR<sup>®</sup> 2122-5

GUR<sup>®</sup>

Stress-strain

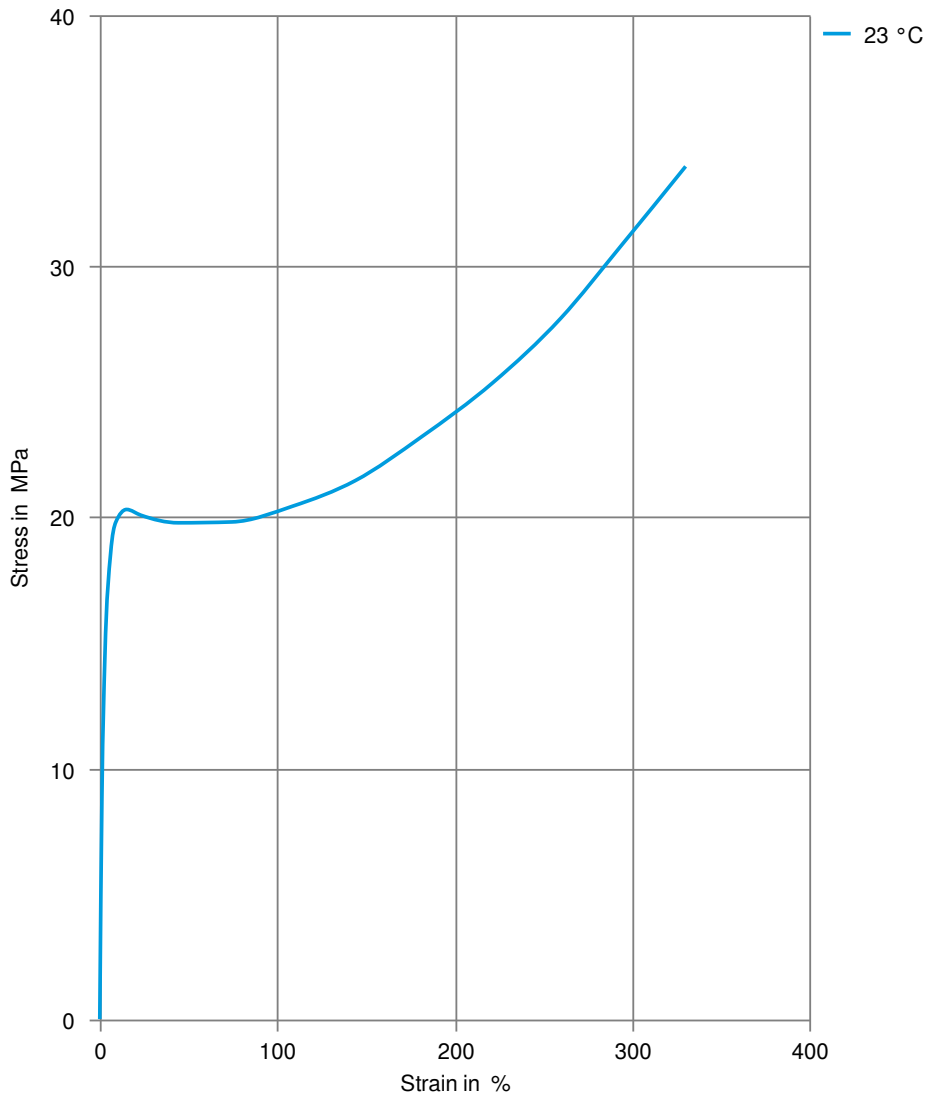

# GUR® 2122-5

GUR®

## Secant modulus-strain

