

GUR® 4150

GUR®

UHMW-PE powder grade for sheet and profile

The density of the particles according DIN 51913 (Helium Pycnometry) is > 0,94 g/cm³.

Product information

Resin Identification	(PE-UHMW)	ISO 1043
Part Marking Code	>(PE-UHMW)<	ISO 11469
Average molecular weight	8.4E6 g/mol	Margolies' equation
Average particle size, d50	120 µm	laser scattering

Rheological properties

Viscosity number	3600 cm ³ /g	ISO 307, 1628
Intrinsic viscosity	3000	ISO 307, 1628

Typical mechanical properties

Tensile modulus	630 MPa	ISO 527-1/-2
Tensile stress at yield, 50mm/min	19 MPa	ISO 527-1/-2
Tensile strain at yield, 50mm/min	14 %	ISO 527-1/-2
Tensile stress at 50% strain	19 MPa	ISO 527-1/-2
Tensile stress at break, 50mm/min	40 MPa	ISO 527-1/-2
Nominal strain at break	400 %	ISO 527-1/-2
Elongational stress F, 150/10	0.51 MPa	ISO 21304-2
Charpy double notched impact strength, 23°C	180 kJ/m ²	ISO 21304-2
Poisson's ratio	0.47 ^[C]	
Shore D hardness, 15s	60	ISO 48-4 / ISO 868

[C]: Calculated

Tribological properties

Wear by sandslurry method (based on GUR 4120=100)	85
--	----

Thermal properties

Temperature of deflection under load, 1.8 MPa	38 °C	ISO 75-1/-2
Vicat softening temperature, 50°C/h 50N	80 °C	ISO 306

Flammability

UL recognition	yes	UL 94
----------------	-----	-------

Electrical properties

Volume resistivity	1E12 Ohm.m	IEC 62631-3-1
Surface resistivity	1E12 Ohm	IEC 62631-3-2

GUR® 4150

GUR®


Physical/Other properties

Density	930 kg/m ³	ISO 1183
Bulk density	450 kg/m ³	ISO 60

Characteristics

Processing	Ram Extrusion, Compression moulding
Delivery form	Powder
Special characteristics	High impact or impact modified, Hydrolysis resistant, Low wear / Low friction, Chemical resistant

Stress-strain

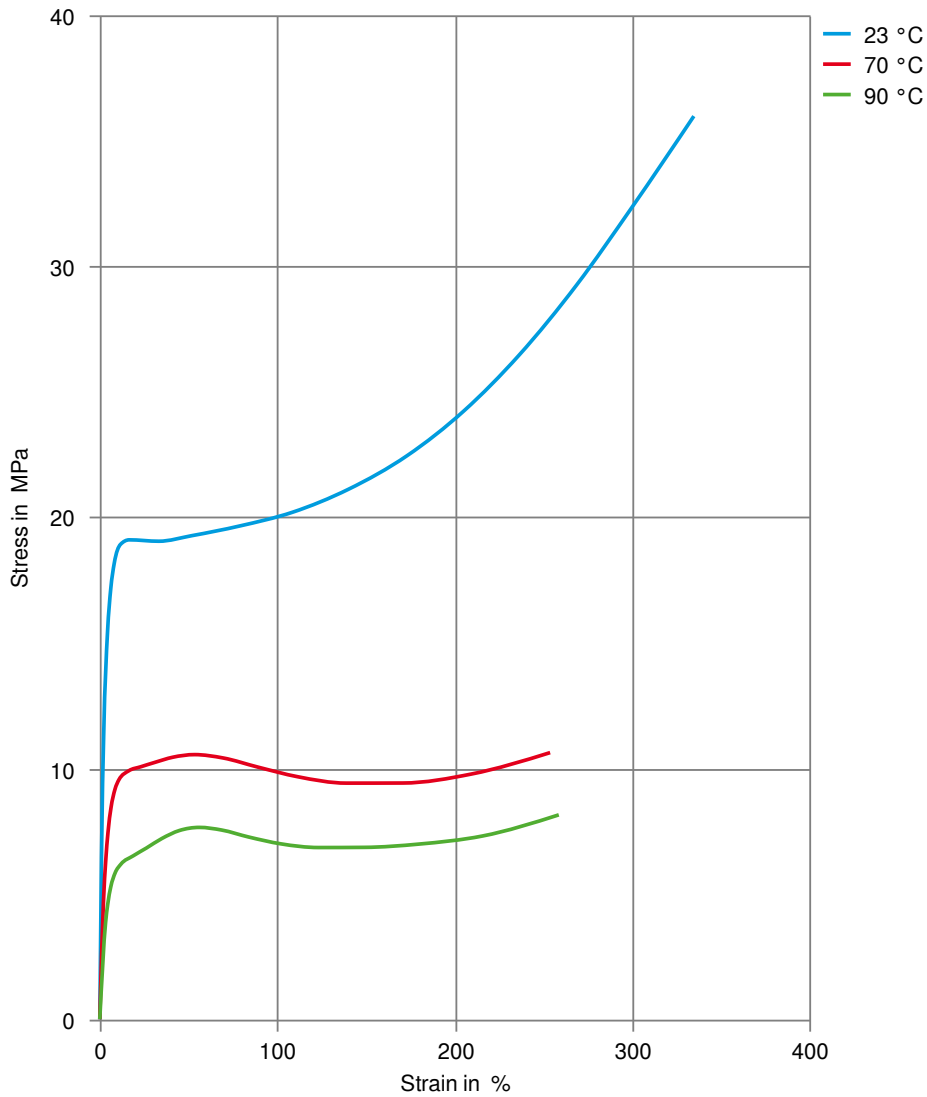

GUR® 4150

GUR®

Secant modulus-strain

