

Product Information

VESTAKEEP® 4000 GF30

GLASS FIBER-REINFORCED (30%) POLYETHER ETHER KETONE



VESTAKEEP® 4000 GF30 is a glass fiber-reinforced (30%) polyether ether ketone for injection molding.

The semi-crystalline polymer features superior mechanical, thermal, and chemical resistance. Parts made from VESTAKEEP® 4000 GF30 are of low flammability.

VESTAKEEP® 4000 GF30 can be processed on common injection molding machines for thermoplastics.

We recommend a melt temperature of 380°C to 400°C during the injection molding process. The mold temperature should be within a range of 160°C to 200°C, preferably 180°C.

VESTAKEEP® 4000 GF30 is supplied as cylindrical pellets in 25kg boxes with moisture-proof polyethylene liners.

Inside the original and undamaged packaging, the product has a shelf life of at least 2 years when stored in dry rooms at temperatures not exceeding 30°C.

Pigmentation may affect the values.

For guidance processing of VESTAKEEP® 4000 GF30 please follow the general recommendations in our brochure "VESTAKEEP® PEEK Processing Guidelines".

The values presented are typical or average values, they do not constitute a specification.

Key Features

Industrial Sector

Automotive and Mobility, Aircraft and Aerospace, Industry and Engineering, Energy, Oil and Gas

Processing

Injection molding, Extrusion

Delivery form

Pellets, Granules

Resistance to

Heat (thermal stability), Fire / burn

Additives

Glass fibers

Mechanical properties ISO

Tensile modulus

dry

11000

Unit

MPa

Test Standard

ISO 527

Tensile strength	160	MPa	ISO 527
Stress at break	160	MPa	ISO 527
Strain at break, B	2	%	ISO 527
Poisson's ratio, 23°C	0.41	-	ISO 527
Charpy impact strength, +23°C	70	kJ/m ²	ISO 179/1eU
Type of failure	C	-	-
Charpy impact strength, -30°C	75	kJ/m ²	ISO 179/1eU
Type of failure	C	-	-
Charpy notched impact strength, +23°C	11	kJ/m ²	ISO 179/1eA
Type of failure	C	-	-
Charpy notched impact strength, -30°C	9	kJ/m ²	ISO 179/1eA
Type of failure	C	-	-

Thermal properties	dry	Unit	Test Standard
Melting temperature	340	°C	ISO 11357-1/-3
Temp. of deflection under load A, 1.80 MPa	312	°C	ISO 75-1/-2
Temp. of deflection under load B, 0.45 MPa	335	°C	ISO 75-1/-2
Vicat softening temperature A, 10 N, 50 K/h	340	°C	ISO 306
Vicat softening temperature B, 50 N, 50 K/h	335	°C	ISO 306
Coeff. of linear therm. expansion, 23°C to 55 °C, parallel	30	E-6/K	ISO 11359-1/-2
Melting Temperature	340	°C	ASTM D 3418

Physical properties	dry	Unit	Test Standard
Density	1500	kg/m ³	ISO 1183
Water absorption	0.4	%	Sim. to ISO 62
Density	1500	kg/m ³	ASTM D 792

Burning Behav.	dry	Unit	Test Standard
Burning behav. at 1.5 mm nom. thickn.	V-0	class	IEC 60695-11-10
Thickness tested	1.6	mm	-
Burnin behav. at thickness h	V-0	class	IEC 60695-11-10
Thickness tested	3.2	mm	-
Oxygen index	45	%	ISO 4589-1/-2
Limiting Oxygen Index	45	%	ASTM D 2863
Glow Wire Flammability Index (GWFI)	960	°C	IEC 60695-2-12
GWFI - thickness tested	2	mm	-
Glow Wire Ignition Temperature (GWIT)	825	°C	IEC 60695-2-13
GWIT - thickness tested	2	mm	-

Electrical properties	dry	Unit	Test Standard
Volume resistivity, ρ_v	>1E13	Ohm*m	IEC 62631-3-1
Surface resistivity, ρ_s	1E15	Ohm	IEC 62631-3-2
Surface resistance, RSD	1E14	Ohm	IEC 62631-3-2
Relative permittivity, 1MHz	3.3	-	IEC 62631-2-1
Dissipation factor, 1MHz	40	E-4	IEC 62631-2-1
Dielectric strength, AC, S20/P50	16	kV/mm	Sim. to IEC 60243-1
CTI, test solution A, 50 drops value	200	-	IEC 60112
Assessment of the insulation group	III a	-	DIN EN 60664-1


Rheological properties	dry	Unit	Test Standard
Melt volume-flow rate, MVR	32	cm ³ /10min	ISO 1133
Temperature	400	°C	-
Load	21.6	kg	-
Melt volume-flow rate, MVR	2	cm ³ /10min	ISO 1133
Temperature	380	°C	-

Load	5	kg	-
Molding shrinkage, parallel	0.3	%	ISO 294-4, 2577
Molding shrinkage, normal	0.7	%	ISO 294-4, 2577
Mold temperature	180	°C	-
Melt temperature	380	°C	-

Test specimen production	dry	Unit	Test Standard
Injection Molding, melt temperature	400	°C	ISO 294
Injection Molding, mold temperature	180	°C	ISO 294
Injection Molding, injection velocity	200	mm/s	ISO 294
Injection Molding, pressure at hold	120	MPa	ISO 294

Diagrams

Tensile modulus-temperature

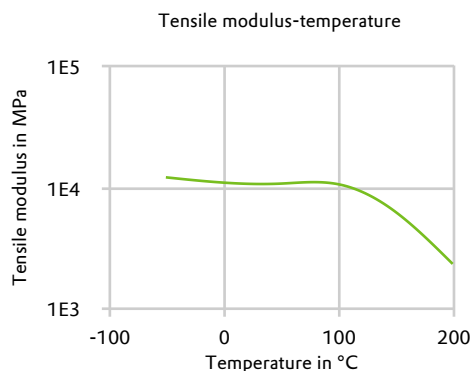

Characteristics

Applications

Electrical and Electronical, Encapsulation

Color

Natural color

Special Characteristics

Low warpage / Low shrinkage

Chemical Resistance

General chemical resistance

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass) (23°C)
- ✓ Citric Acid solution (10% by mass) (23°C)
- ✓ Hydrochloric Acid (36% by mass) (23°C)
- ✗ Nitric Acid (40% by mass) (23°C)
- ✓ Sulfuric Acid (5% by mass) (23°C)
- ✓ Chromic Acid solution (40% by mass) (23°C)

Bases

- ✓ Sodium Hydroxide solution (35% by mass) (23°C)
- ✓ Sodium Hydroxide solution (1% by mass) (23°C)
- ✓ Ammonium Hydroxide solution (10% by mass) (23°C)

Alcohols

- ✓ Isopropyl alcohol (23°C)
- ✓ Methanol (23°C)
- ✓ Ethanol (23°C)

Hydrocarbons

- ✓ n-Hexane (23°C)
- ✓ Toluene (23°C)
- ✓ iso-Octane (23°C)

Ketones

- ✓ Acetone (23°C)

Ethers

- ✓ Diethyl ether (23°C)

Mineral oils

- ✓ SAE 10W40 multigrade motor oil (23°C)
- ✓ Insulating Oil (23°C)

Standard Fuels

- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (23°C)

Salt solutions

- ✓ Sodium Chloride solution (10% by mass) (23°C)
- ✓ Sodium Hypochlorite solution (10% by mass) (23°C)
- ✓ Sodium Carbonate solution (20% by mass) (23°C)
- ✓ Sodium Carbonate solution (2% by mass) (23°C)
- ✓ Zinc Chloride solution (50% by mass) (23°C)

Other

- ✓ Ethyl Acetate (23°C)
- ✓ Hydrogen peroxide (23°C)

- ✓ Ethylene Glycol (50% by mass) in water (108°C)
- ✓ Water (23°C)
- ✓ Deionized water (90°C)

Rheological calculation properties

	dry	Unit	Test Standard
Min. mold temperature	160	°C	-
Max. mold temperature	200	°C	-
Min. melt temperature	380	°C	-
Max. melt temperature	400	°C	-