



VALOX™ Resin 4631

Europe-Africa-Middle East: COMMERCIAL

VALOX 4631 is a 30% glass reinforced, flame retarded PBT injection moulding resin with good electrical properties and excellent mechanical properties.

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
MECHANICAL			
Tensile Stress, yld, Type I, 5 mm/min	1320	kgf/cm ²	ASTM D 638
Tensile Stress, brk, Type I, 5 mm/min	1320	kgf/cm ²	ASTM D 638
Tensile Strain, yld, Type I, 5 mm/min	2	%	ASTM D 638
Tensile Strain, brk, Type I, 5 mm/min	2	%	ASTM D 638
Tensile Modulus, 5 mm/min	117200	kgf/cm ²	ASTM D 638
Flexural Stress, yld, 1.3 mm/min, 50 mm span	2030	kgf/cm ²	ASTM D 790
Flexural Stress, brk, 1.3 mm/min, 50 mm span	2030	kgf/cm ²	ASTM D 790
Flexural Modulus, 1.3 mm/min, 50 mm span	91700	kgf/cm ²	ASTM D 790
Tensile Stress, yield, 5 mm/min	130	MPa	ISO 527
Tensile Stress, break, 5 mm/min	130	MPa	ISO 527
Tensile Strain, yield, 5 mm/min	2	%	ISO 527
Tensile Strain, break, 5 mm/min	2	%	ISO 527
Tensile Modulus, 1 mm/min	11500	MPa	ISO 527
Flexural Stress, yield, 2 mm/min	200	MPa	ISO 178
Flexural Stress, break, 2 mm/min	200	MPa	ISO 178
Flexural Strain, break, 2 mm/min	3	%	ISO 178
Flexural Modulus, 2 mm/min	9600	MPa	ISO 178
Hardness, H358/30	115	MPa	ISO 2039-1
Hardness, Rockwell R	118	-	ISO 2039-2
IMPACT			
Charpy Impact, unnotched, 23°C	50	kJ/m ²	ISO 179/2C
Charpy Impact, unnotched, -30°C	50	kJ/m ²	ISO 179/2C



VALOX™ Resin 4631

Europe-Africa-Middle East: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
IMPACT			
Izod Impact, unnotched, 23°C	67	cm-kgf/cm	ASTM D 4812
Izod Impact, unnotched, -30°C	67	cm-kgf/cm	ASTM D 4812
Izod Impact, notched, 23°C	8	cm-kgf/cm	ASTM D 256
Izod Impact, notched, 0°C	8	cm-kgf/cm	ASTM D 256
Izod Impact, notched, -30°C	8	cm-kgf/cm	ASTM D 256
Izod Impact, unnotched 80*10*4 +23°C	45	kJ/m ²	ISO 180/1U
Izod Impact, unnotched 80*10*4 -30°C	45	kJ/m ²	ISO 180/1U
Izod Impact, notched 80*10*4 +23°C	8	kJ/m ²	ISO 180/1A
Izod Impact, notched 80*10*4 0°C	8	kJ/m ²	ISO 180/1A
Izod Impact, notched 80*10*4 -30°C	8	kJ/m ²	ISO 180/1A
Charpy 23°C, V-notch Edgew 80*10*4 sp=62mm	10	kJ/m ²	ISO 179/1eA
Charpy Impact, notched, 23°C	11	kJ/m ²	ISO 179/2C
Charpy -30°C, V-notch Edgew 80*10*4 sp=62mm	10	kJ/m ²	ISO 179/1eA
Charpy Impact, notched, -30°C	9	kJ/m ²	ISO 179/2C
Charpy 23°C, Unnotch Edgew 80*10*4 sp=62mm	50	kJ/m ²	ISO 179/1eU
Charpy -30°C, Unnotch Edgew 80*10*4 sp=62mm	55	kJ/m ²	ISO 179/1eU
THERMAL			
Vicat Softening Temp, Rate A/50	220	°C	ASTM D 1525
Vicat Softening Temp, Rate B/50	205	°C	ASTM D 1525
HDT, 0.45 MPa, 3.2 mm, unannealed	220	°C	ASTM D 648
HDT, 1.82 MPa, 3.2mm, unannealed	205	°C	ASTM D 648
CTE, -40°C to 40°C, flow	2.18E-05	1/°C	ISO 11359-2
CTE, -40°C to 40°C, xflow	8.18E-05	1/°C	ISO 11359-2
CTE, 23°C to 80°C, flow	1.6E-05	1/°C	ISO 11359-2



VALOX™ Resin 4631

Europe-Africa-Middle East: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
THERMAL			
CTE, 23°C to 80°C, xflow	1.2E-04	1/°C	ISO 11359-2
CTE, 23°C to 150°C, flow	1.4E-05	1/°C	ISO 11359-2
CTE, 23°C to 150°C, xflow	1.3E-04	1/°C	ISO 11359-2
Ball Pressure Test, 125°C +/- 2°C	PASSES	-	IEC 60695-10-2
Vicat Softening Temp, Rate A/50	220	°C	ISO 306
Vicat Softening Temp, Rate B/50	205	°C	ISO 306
Vicat Softening Temp, Rate B/120	205	°C	ISO 306
HDT/Be, 0.45MPa Edgew 120*10*4 sp=100mm	220	°C	ISO 75/Be
HDT/Bf, 0.45 MPa Flatw 80*10*4 sp=64mm	220	°C	ISO 75/Bf
HDT/Af, 1.8 MPa Flatw 80*10*4 sp=64mm	205	°C	ISO 75/Af
Relative Temp Index, Elec	130	°C	UL 746B
Relative Temp Index, Mech w/impact	130	°C	UL 746B
Relative Temp Index, Mech w/o impact	140	°C	UL 746B
PHYSICAL			
Specific Gravity	1.67	-	ASTM D 792
Filler Content	30	%	ASTM D 229
Mold Shrinkage on Tensile Bar, flow (2) (5)	0.1 - 0.3	%	SABIC Method
Mold Shrinkage on Tensile Bar, xflow (2) (5)	0.4 - 0.7	%	SABIC Method
Melt Flow Rate, 250°C/2.16 kgf	13	g/10 min	ASTM D 1238
Melt Flow Rate, 250°C/5.0 kgf	67	g/10 min	ASTM D 1238
Melt Flow Rate, 265°C/5.0 kgf	90	g/10 min	ASTM D 1238
Melt Flow Rate, 266°C/5.0 kgf	90	g/10 min	ASTM D 1238
Density	1.67	g/cm ³	ISO 1183
Water Absorption, (23°C/sat)	0.25	%	ISO 62
Moisture Absorption (23°C / 50% RH)	0.07	%	ISO 62
Melt Volume Rate, MVR at 250°C/5.0 kg	40	cm ³ /10 min	ISO 1133
Melt Volume Rate, MVR at 265°C/5.0 kg	65	cm ³ /10 min	ISO 1133



VALOX™ Resin 4631

Europe-Africa-Middle East: COMMERCIAL

TYPICAL PROPERTIES ¹	TYPICAL VALUE	Unit	Standard
PHYSICAL			
Melt Viscosity, 260°C, 1500 sec-1	115	Pa-s	ISO 11443
ELECTRICAL			
Volume Resistivity	>1.E+15	Ohm-cm	ASTM D 257
Relative Permittivity, 1 MHz	3.5	-	ASTM D 150
Dissipation Factor, 1 MHz	0.01	-	ASTM D 150
Hot Wire Ignition {PLC}	0	PLC Code	UL 746A
High Voltage Arc Track Rate {PLC}	4	PLC Code	UL 746A
High Ampere Arc Ign, surface {PLC}	3	PLC Code	UL 746A
Comparative Tracking Index (UL) {PLC}	2	PLC Code	UL 746A
Volume Resistivity	>1.E+15	Ohm-cm	IEC 60093
Surface Resistivity, ROA	>1.E+15	Ohm	IEC 60093
Dielectric Strength, in oil, 0.8 mm	27	kV/mm	IEC 60243-1
Dielectric Strength, in oil, 1.6 mm	23	kV/mm	IEC 60243-1
Dielectric Strength, in oil, 3.2 mm	19	kV/mm	IEC 60243-1
Relative Permittivity, 1 MHz	3.5	-	IEC 60250
Dissipation Factor, 50/60 Hz	0.001	-	IEC 60250
Dissipation Factor, 1 MHz	0.01	-	IEC 60250
Comparative Tracking Index	250	V	IEC 60112
Relative Permittivity, 50/60 Hz	3	-	IEC 60250
FLAME CHARACTERISTICS			
UL Recognized, 94V-0 Flame Class Rating (3)	0.75	mm	UL 94
Glow Wire Flammability Index 960°C, passes at	3	mm	IEC 60695-2-12
Oxygen Index (LOI)	34	%	ISO 4589



VALOX™ Resin 4631

Europe-Africa-Middle East: COMMERCIAL

PROCESSING PARAMETERS	TYPICAL VALUE	Unit
Injection Molding		
Drying Temperature	110 - 120	°C
Drying Time	2 - 4	hrs
Maximum Moisture Content	0.02	%
Melt Temperature	250 - 270	°C
Nozzle Temperature	240 - 260	°C
Front - Zone 3 Temperature	245 - 265	°C
Middle - Zone 2 Temperature	240 - 255	°C
Rear - Zone 1 Temperature	230 - 245	°C
Hopper Temperature	40 - 60	°C
Mold Temperature	40 - 100	°C



VALOX™ Resin 4631

Europe-Africa-Middle East: COMMERCIAL


CALCULATED FLOW LENGTH INDICATION

Moldflow® Radial Flow Analysis

VALOX® 4631

Melt Temperature : 260°C

Mold Temperature : 70°C

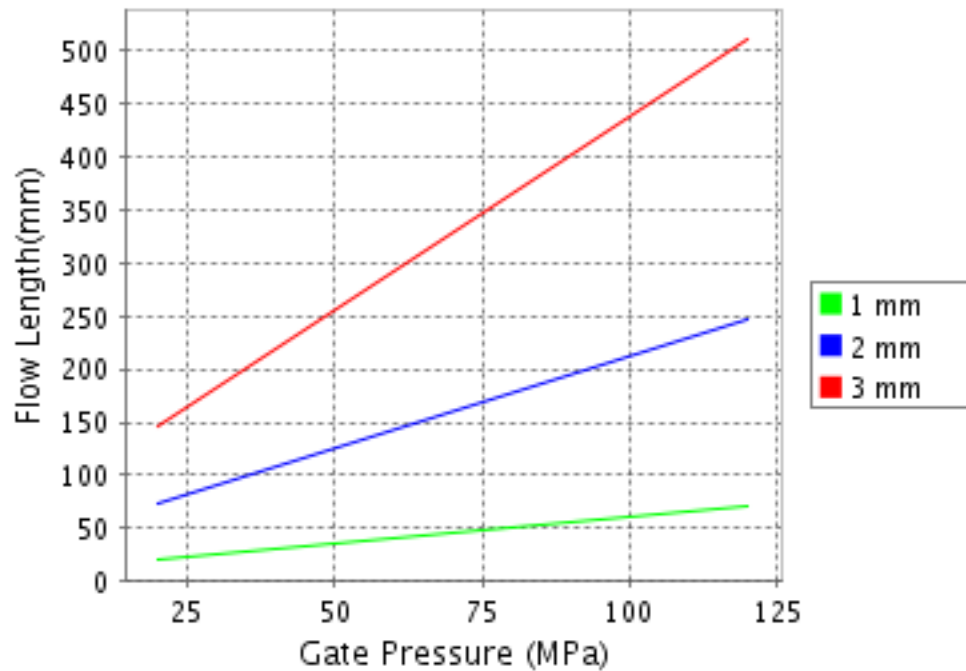

Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.

© Moldflow is a registered trademark of the Moldflow Corporation.