

Technical Data Sheet

# Ronfalin ABS 1337 U

Acrylonitrile Butadiene Styrene  
LyondellBasell Industries  
Engineering Plastics

**Product Description**

General purpose ABS Compound, high flow with UV stabilization. (Former name: POLYMAN ABS M/TK SF K1516)

**General**

Features	• Good Flow
Processing Method	• Injection Molding
Resin ID (ISO 1043)	• ABS

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density	1.04 g/cm <sup>3</sup>	1.04 g/cm <sup>3</sup>	ISO 1183/A
Melt Volume-Flow Rate (MVR) (220°C/10.0 Kg)	37 cm <sup>3</sup> /10min	37 cm <sup>3</sup> /10min	ISO 1133

Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Modulus	377000 psi	2600 MPa	ISO 527-1/1A/1
Tensile Stress (Yield)	6960 psi	48.0 MPa	ISO 527-2/1A/50
Tensile Strain (Yield)	3.0 %	3.0 %	ISO 527-2/1A/50
Nominal Tensile Strain at Break	16 %	16 %	ISO 527-2/1A/50
Flexural Modulus <sup>1</sup>	406000 psi	2800 MPa	ISO 178
Flexural Stress <sup>1</sup> (4.8% Strain)	11500 psi	79.0 MPa	ISO 178

Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Charpy Notched Impact Strength			ISO 179/1eA
-22°F (-30°C)	3.8 ft·lb/in <sup>2</sup>	8.0 kJ/m <sup>2</sup>	
73°F (23°C)	8.1 ft·lb/in <sup>2</sup>	17 kJ/m <sup>2</sup>	
Charpy Unnotched Impact Strength			ISO 179/1eU
-22°F (-30°C)	39 ft·lb/in <sup>2</sup>	83 kJ/m <sup>2</sup>	
73°F (23°C)	No Break	No Break	

Hardness	Nominal Value (English)	Nominal Value (SI)	Test Method
Ball Indentation Hardness (H 358/30)	17400 psi	120 MPa	ISO 2039-1

Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			
66 Psi (0.45 Mpa), Unannealed	196 °F	91.0 °C	ISO 75-2/Bf
264 Psi (1.8 Mpa), Unannealed	174 °F	79.0 °C	ISO 75-2/Af
Vicat Softening Temperature			
--	207 °F	97.0 °C	ISO 306/B50
--	217 °F	103 °C	ISO 306/A50

Electrical	Nominal Value (English)	Nominal Value (SI)	Test Method
Surface Resistivity	> 1.0E+15 ohms	> 1.0E+15 ohms	IEC 60093
Volume Resistivity	> 1.0E+13 ohms·m	> 1.0E+13 ohms·m	IEC 62631-3-1
Comparative Tracking Index (Solution A)	600 V	600 V	IEC 60112



Technical Data Sheet

**Ronfalin ABS 1337 U**

Acrylonitrile Butadiene Styrene  
 LyondellBasell Industries  
 Engineering Plastics

Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Burning Rate			
0.0787 In (2.00 Mm)	< 3.9 in/min	< 100 mm/min	ISO 3795
0.0787 In (2.00 Mm)	< 3.9 in/min	< 100 mm/min	FMVSS 302
Flammability Classification			IEC 60695-11-10, -20
0.06 In (1.5 Mm)	HB	HB	
0.12 In (3.0 Mm)	HB	HB	
Glow Wire Ignition Temperature			IEC 60695-2-13
0.06 In (1.5 Mm)	1290 °F	700 °C	
0.12 In (3.0 Mm)	1290 °F	700 °C	


**Additional Information**

- 1.) Not for use in food contact applications
- 2.) Not for use in medical or pharmaceutical applications

Technical Data Sheet

# Ronfalin ABS 1337 U

Acrylonitrile Butadiene Styrene  
 LyondellBasell Industries  
 Engineering Plastics

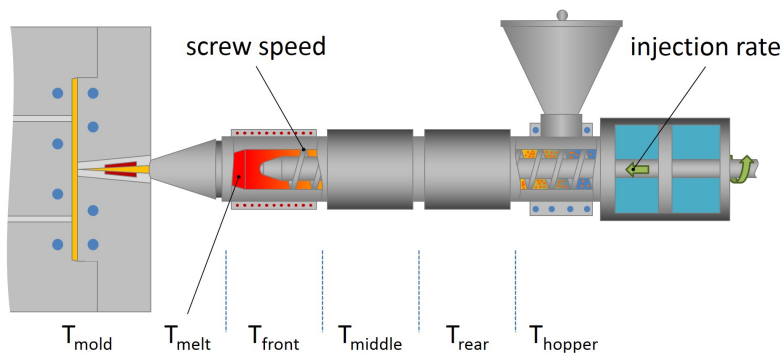

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	176 °F	80 °C
Drying Time	2.0 to 4.0 hr	2.0 to 4.0 hr
Processing (Melt) Temp	446 to 482 °F	230 to 250 °C
Mold Temperature	104 to 176 °F	40 to 80 °C

**Notes**

<sup>1</sup> 0.079 in/min (2.0 mm/min)

**Notes**

These are typical property values not to be construed as specification limits.