

Technical Data Sheet

SCHULAMID[®] 66 CF 30 BLACK

Polyamide 66
Engineering Plastics

Product Description

30% carbon fiber reinforced Polyamide 66, available with different kinds of Heat Stabilizations Systems

General

Filler / Reinforcement	• Carbon Fiber, 30% Filler by Weight
Processing Method	• Injection Molding

Physical	Dry	Conditioned	Unit	Test Method
Density	1.27	--	g/cm ³	ISO 1183/A
Molding Shrinkage				ISO 294-4
Across Flow	0.70	--	%	
Flow	0.20	--	%	
Viscosity Number	145	--	cm ³ /g	ISO 307
Mechanical	Dry	Conditioned	Unit	Test Method
Tensile Modulus	3.22E+6 (22200)	2.34E+6 (16100)	psi (MPa)	ISO 527-2/1A/1
Tensile Stress (Break)	37000 (255)	30500 (210)	psi (MPa)	ISO 527-2/1A/5
Tensile Strain (Break)	2.0	3.0	%	ISO 527-2/1A/5
Flexural Modulus ¹	2.97E+6 (20500)	--	psi (MPa)	ISO 178
Flexural Stress ¹				ISO 178
2.8% Strain	58000 (400)	--	psi (MPa)	
2.8% Strain ²	56600 (390)	--	psi (MPa)	
Impact	Dry	Conditioned	Unit	Test Method
Charpy Notched Impact Strength				ISO 179/1eA
-22°F (-30°C)	3.6 (7.5)	--	ft-lb/in ² (kJ/m ²)	
73°F (23°C)	4.8 (10)	6.2 (13)	ft-lb/in ² (kJ/m ²)	
Charpy Unnotched Impact Strength				ISO 179/1eU
-22°F (-30°C)	31 (65)	--	ft-lb/in ² (kJ/m ²)	
73°F (23°C)	38 (80)	43 (90)	ft-lb/in ² (kJ/m ²)	
Thermal	Dry	Conditioned	Unit	Test Method
Heat Deflection Temperature				ISO 75-2/ Af
264 psi (1.8 MPa), Unannealed	> 482 (> 250)	--	°F (°C)	
Electrical	Dry	Conditioned	Unit	Test Method
Volume Resistivity	1.0E+2	--	ohms-m	IEC 62631-3-1

Technical Data Sheet

SCHULAMID[®] 66 CF 30 BLACK


Polyamide 66
Engineering Plastics

Flammability	Dry	Conditioned	Unit	Test Method
Burning Rate				
0.0787 in (2.00 mm)	< 3.9 (< 100)	--	in/min (mm/min)	ISO 3795
0.0787 in (2.00 mm)	< 3.9 (< 100)	--	in/min (mm/min)	FMVSS 302

Technical Data Sheet

SCHULAMID® 66 CF 30 BLACK

Polyamide 66
Engineering Plastics

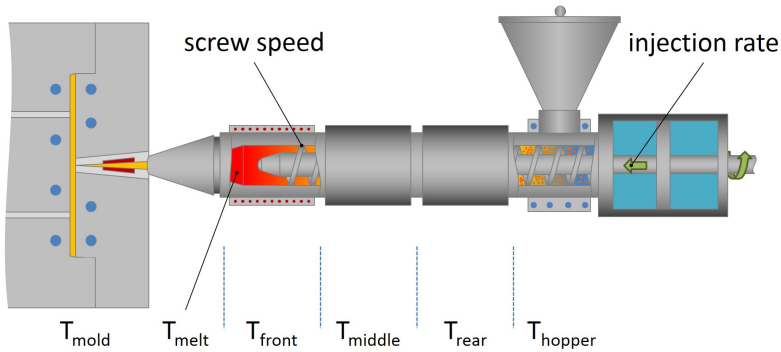

Injection	Dry (English)	Dry (SI)
Drying Temperature	176 °F	80 °C
Drying Time	3.0 to 4.0 hr	3.0 to 4.0 hr
Suggested Max Regrind	20 %	20 %
Processing (Melt) Temp	500 to 572 °F	260 to 300 °C
Mold Temperature	140 to 248 °F	60 to 120 °C

Notes

¹ 0.079 in/min (2.0 mm/min)

² at Break

Notes

These are typical property values not to be construed as specification limits.