

## Technical Data Sheet

# Schulaketon MV FC

Polyketone, Aliphatic  
LyondellBasell Industries  
Engineering Plastics

### Product Description

Medium viscosity aliphatic Polyketone for food contact applications

### General

Processing Method	• Extrusion	• Injection Molding
Resin ID (ISO 1043)	• PK	

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density	1.24 g/cm <sup>3</sup>	1.24 g/cm <sup>3</sup>	ISO 1183/A
Melt Volume-Flow Rate (MVR) (240°C/2.16 Kg)	6.0 cm <sup>3</sup> /10min	6.0 cm <sup>3</sup> /10min	ISO 1133
Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Modulus	203000 psi	1400 MPa	ISO 527-1/1A/1
Tensile Stress (Yield)	8700 psi	60.0 MPa	ISO 527-2/1A/50
Tensile Strain (Yield)	20 %	20 %	ISO 527-2/1A/50
Flexural Modulus <sup>1</sup>	218000 psi	1500 MPa	ISO 178
Flexural Stress <sup>1</sup>			ISO 178
9.0% Strain	8700 psi	60.0 MPa	
3.5% Strain	8700 psi	60.0 MPa	
Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Charpy Notched Impact Strength			ISO 179/1eA
-40°F (-40°C)	2.4 ft·lb/in <sup>2</sup>	5.0 kJ/m <sup>2</sup>	
73°F (23°C)	10 ft·lb/in <sup>2</sup>	22 kJ/m <sup>2</sup>	
Charpy Unnotched Impact Strength			ISO 179
-40°F (-40°C)	No Break	No Break	
73°F (23°C)	No Break	No Break	ISO 179/1eU
Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			
66 Psi (0.45 Mpa), Unannealed	336 °F	169 °C	ISO 75-2/Bf
264 Psi (1.8 Mpa), Unannealed	171 °F	77.0 °C	ISO 75-2/Af
Vicat Softening Temperature			
--	369 °F	187 °C	ISO 306/B50
--	417 °F	214 °C	ISO 306/A50
RTI Elec			UL 746B
0.031 In (0.8 Mm)	122 °F	50.0 °C	
0.06 In (1.6 Mm)	122 °F	50.0 °C	
0.12 In (3.0 Mm)	122 °F	50.0 °C	
RTI Imp			UL 746B
0.031 In (0.8 Mm)	122 °F	50.0 °C	
0.06 In (1.6 Mm)	122 °F	50.0 °C	
0.12 In (3.0 Mm)	122 °F	50.0 °C	
RTI Str			UL 746B
0.031 In (0.8 Mm)	122 °F	50.0 °C	
0.06 In (1.6 Mm)	122 °F	50.0 °C	
0.12 In (3.0 Mm)	122 °F	50.0 °C	

Technical Data Sheet

# Schulaketon MV FC


Polyketone, Aliphatic  
LyondellBasell Industries  
Engineering Plastics

Electrical	Nominal Value (English)	Nominal Value (SI)	Test Method
Surface Resistivity	> 1.0E+15 ohms	> 1.0E+15 ohms	IEC 60093
Volume Resistivity	> 1.0E+13 ohms·m	> 1.0E+13 ohms·m	IEC 62631-3-1
Comparative Tracking Index (Solution A)	600 V	600 V	IEC 60112
Flammability	Nominal Value (English)	Nominal Value (SI)	Test Method
Burning Rate			
0.0787 In (2.00 Mm)	< 3.9 in/min	< 100 mm/min	ISO 3795
0.0787 In (2.00 Mm)	< 3.9 in/min	< 100 mm/min	FMVSS 302
Flame Rating			
0.031 In (0.8 Mm)	HB	HB	UL 94
0.06 In (1.6 Mm)	HB	HB	UL 94 IEC 60695-11-10, -20
0.13 In (3.2 Mm)	HB	HB	UL 94
0.03 In (0.8 Mm)	HB	HB	IEC 60695-11-10, -20
0.12 In (3.0 Mm)	HB	HB	IEC 60695-11-10, -20
Glow Wire Flammability Index			
0.06 In (1.5 Mm)	1290 °F	700 °C	IEC 60695-2-12
0.12 In (3.0 Mm)	1290 °F	700 °C	
Glow Wire Ignition Temperature			
0.06 In (1.5 Mm)	1340 °F	725 °C	IEC 60695-2-13
0.12 In (3.0 Mm)	1340 °F	725 °C	

Technical Data Sheet

# Schulaketon MV FC

Polyketone, Aliphatic  
LyondellBasell Industries  
Engineering Plastics

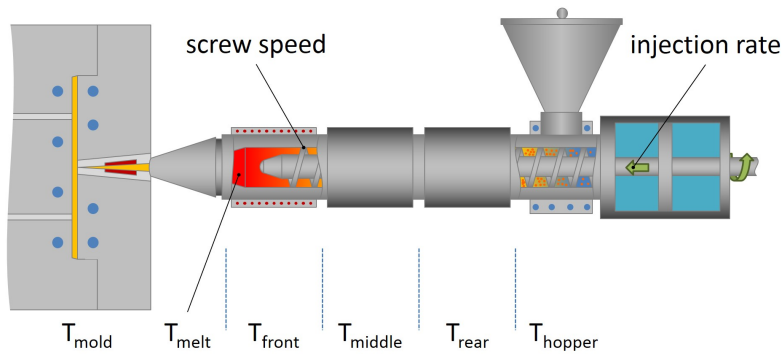

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	176 °F	80 °C
Drying Time	3.0 to 4.0 hr	3.0 to 4.0 hr
Suggested Max Moisture	0.15 %	0.15 %
Processing (Melt) Temp	437 to 464 °F	225 to 240 °C
Mold Temperature	140 to 248 °F	60 to 120 °C

### Injection Notes

Before start, nozzle, screw, barrel and hot-runner have to be cleaned with Polyolefin. Contamination of other material leads to degradation or crosslinking of SCHULAKETON®.

Avoid shut down for more than 15 minutes at moulding temperature, because of degradation and crosslinking of SCHULAKETON®. Purge with Polyolefin!

### Notes

<sup>1</sup> 0.079 in/min (2.0 mm/min)

### Notes

These are typical property values not to be construed as specification limits.