

Technical Data Sheet

# Ferro Pp NPP00GD16HB

Polypropylene Copolymer  
LyondellBasell Industries  
Engineering Plastics

**General**

Features	• Copolymer
Appearance	• Natural Color
Forms	• Pellets
Processing Method	• Injection Molding

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	0.900	0.898 g/cm <sup>3</sup>	ASTM D792
Melt Mass-Flow Rate (MFR) (230°C/2.16 Kg)	12 g/10 min	12 g/10 min	ASTM D1238

Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Strength (Yield, 73°F (23°C))	4000 psi	27.6 MPa	ASTM D638
Tensile Elongation (Break, 73°F (23°C))	10 %	10 %	ASTM D638
Flexural Modulus			ASTM D790
1% Secant : 73°F (23°C)	129000 psi	889 MPa	
Tangent : 73°F (23°C)	135000 psi	931 MPa	
Flexural Strength (Yield, 73°F (23°C))	4400 psi	30.3 MPa	ASTM D790


Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact (73°F (23°C))	1.7 ft·lb/in	91 J/m	ASTM D256
Unnotched Izod Impact (73°F (23°C))	20 ft·lb/in	1100 J/m	ASTM D4812

Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load 66 Psi (0.45 Mpa), Unannealed	185 °F	85.0 °C	ASTM D648

Technical Data Sheet

# Ferro Pp NPP00GD16HB

Polypropylene Copolymer  
 LyondellBasell Industries  
 Engineering Plastics

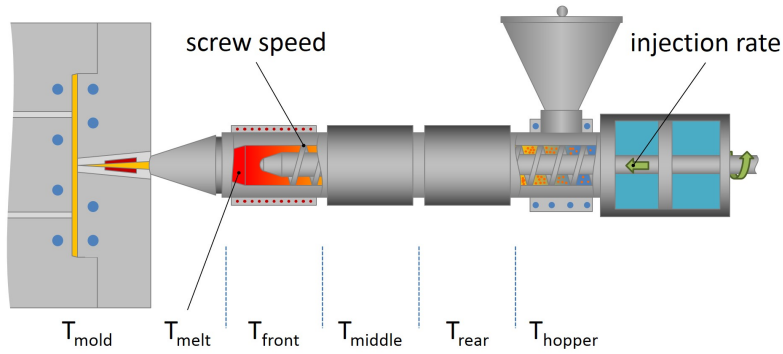

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	176 °F	80 °C
Drying Time	2.0 to 3.0 hr	2.0 to 3.0 hr
Processing (Melt) Temp	428 to 500 °F	220 to 260 °C
Mold Temperature	86 to 140 °F	30 to 60 °C

**Notes**

These are typical property values not to be construed as specification limits.