

Technical Data Sheet
Ferro PP TPP40AC35WH
 Polypropylene Homopolymer
 Engineering Plastics



General

Filler / Reinforcement	• Talc, 41% Filler by Weight
Features	• Homopolymer
Appearance	• White
Forms	• Pellets


Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity	1.27	1.27 g/cm ³	ASTM D792
Melt Mass-Flow Rate (MFR) (230°C/2.16 kg)	6.0 g/10 min	6.0 g/10 min	ASTM D1238
Molding Shrinkage			ASTM D955
Flow	0.011 in/in	1.1 %	
Across Flow	0.013 in/in	1.3 %	

Mechanical	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Strength (73°F (23°C))	4600 psi	31.7 MPa	ASTM D638
Tensile Elongation (Break, 73°F (23°C))	6.0 %	6.0 %	ASTM D638
Flexural Modulus			ASTM D790
1% Secant : 73°F (23°C)	455000 psi	3140 MPa	
Tangent : 73°F (23°C)	592000 psi	4080 MPa	
Flexural Strength (73°F (23°C))	7600 psi	52.4 MPa	ASTM D790

Impact	Nominal Value (English)	Nominal Value (SI)	Test Method
Notched Izod Impact (73°F (23°C))	0.40 ft·lb/in	21 J/m	ASTM D256
Unnotched Izod Impact (73°F (23°C))	5.0 ft·lb/in	270 J/m	ASTM D4812
Gardner Impact (73°F (23°C))	10.0 in·lb	1.13 J	ASTM D5420

Thermal	Nominal Value (English)	Nominal Value (SI)	Test Method
Deflection Temperature Under Load			ASTM D648
66 psi (0.45 MPa), Unannealed	275 °F	135 °C	
264 psi (1.8 MPa), Unannealed	195 °F	90.6 °C	

Technical Data Sheet
Ferro PP TPP40AC35WH
 Polypropylene Homopolymer
 Engineering Plastics

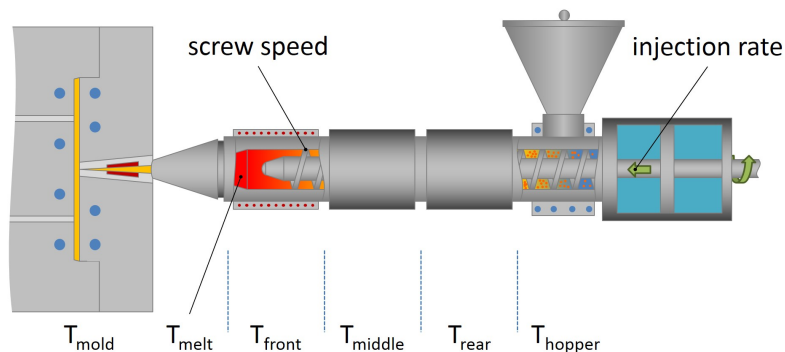

Injection	Nominal Value (English)	Nominal Value (SI)
Drying Temperature	200 °F	93 °C
Drying Time	2.0 to 3.0 hr	2.0 to 3.0 hr
Rear Temperature	400 to 410 °F	204 to 210 °C
Middle Temperature	410 to 415 °F	210 to 213 °C
Front Temperature	415 to 420 °F	213 to 216 °C
Nozzle Temperature	420 to 425 °F	216 to 218 °C
Mold Temperature	110 to 130 °F	43 to 54 °C
Back Pressure	20.0 to 50.0 psi	0.138 to 0.345 MPa
Screw Speed	100 to 150 rpm	100 to 150 rpm
Clamp Tonnage	2.0 to 3.0 tons/in ²	2.8 to 4.1 kN/cm ²
Screw L/D Ratio	20.0:1.0	20.0:1.0
Screw Compression Ratio	2.0:1.0	2.0:1.0

Notes

These are typical property values not to be construed as specification limits.