

Technical Data Sheet

Duragrip DGR 6150NC

Thermoplastic Elastomer
LyondellBasell Industries
Engineering Plastics

Product Description

DuraGrip® DGR 6150 is offered in an NC (colorable) version, and is designed to chemically bond to a wide variety of thermoplastic substrates including ABS, PC, Nylon 6, Nylon 6/6, glass filled Nylon, ASA, PC/ABS alloys, PBT, and PC/PBT alloys. It is easy to use in injection molding and extrusion processes. DGR 6150NC has excellent elastomeric properties and soft touch feel. DuraGrip® bonding grades are hygroscopic, and for best results drying is recommended prior to use.

General

Features	• Good Adhesion
Agency Ratings	• EU 2002/96/EC (WEEE)
RoHS Compliance	• RoHS Compliant
Forms	• Pellets
Processing Method	• Extrusion • Injection Molding

Physical	Nominal Value (English)	Nominal Value (SI)	Test Method
Density / Specific Gravity			
--	1.07	1.07 g/cm³	ASTM D792
--	1.07 g/cm³	1.07 g/cm³	ISO 1183
Elastomers	Nominal Value (English)	Nominal Value (SI)	Test Method
Tensile Stress (100% Strain)	261 psi	1.80 MPa	ASTM D412 ISO 37
Tensile Strength (Yield)	1170 psi	8.07 MPa	ASTM D412 ISO 37
Tensile Elongation (Break)	540 %	540 %	ASTM D412 ISO 37
Hardness	Nominal Value (English)	Nominal Value (SI)	Test Method
Durometer Hardness (Shore A, 5 Sec)	52	52	ASTM D2240 ISO 868
Fill Analysis	Nominal Value (English)	Nominal Value (SI)	Test Method
Melt Viscosity (374°F (190°C), 200 Sec ⁻¹)	323 Pa·s	323 Pa·s	ASTM D3835


Additional Information

The value listed as Density -Specific Gravity, ASTM D792, was tested in accordance with ASTM D471.
The value listed as Density, ISO 1183, was tested in accordance with ISO 2781.

Technical Data Sheet

Duragrip DGR 6150NC

Thermoplastic Elastomer
LyondellBasell Industries
Engineering Plastics

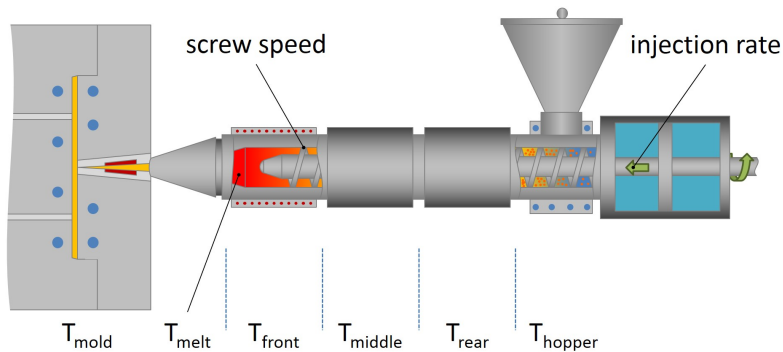

Injection	Nominal Value (English)	Nominal Value (SI)
Rear Temperature	400 to 430 °F	204 to 221 °C
Middle Temperature	420 to 440 °F	216 to 227 °C
Front Temperature	440 to 460 °F	227 to 238 °C
Nozzle Temperature	440 to 480 °F	227 to 249 °C
Processing (Melt) Temp	440 to 490 °F	227 to 254 °C
Mold Temperature	110 to 130 °F	43 to 54 °C
Injection Pressure	400 to 800 psi	2.76 to 5.52 MPa
Screw Speed	50 to 150 rpm	50 to 150 rpm

Injection Notes

- Injection Speed: 1 to 3 in³/sec
- Injection Time (1st Stage/Boost): 0.5 to 4 sec
- Second Stage Pressure: 300 to 500 psi
- Second Stage Time: 3 to 10 sec
- Cooling Time: 10 to 25 sec
- Back Pressure: 25 to 75 %

Notes

These are typical property values not to be construed as specification limits.