

**FRIANYL® DEV B3 GF30 X V0 - PA6**
**Description**

Polyamide 6 compound, 30% glass fiber reinforced, heat resistant, based on flame retardants halogen and red phosphorous free, UL listed V0@0.38mm all color.

*Designed for Electrical applications requiring self-extinguishing properties combined with good mechanical performances, this grade meets the most stringent safety requirements for insulating materials.*

Preliminary Technical Datasheet

Physical properties	Value	Unit	Test Standard
Density	88.6	lb/ft <sup>3</sup>	ISO 1183
Molding shrinkage, parallel (flow)	0.3 - 0.6	%	ISO 294-4, 2577
Molding shrinkage, transverse normal	0.6 - 0.9	%	ISO 294-4, 2577
Water absorption, 23°C-sat	4.3	%	Sim. to ISO 62
Humidity absorption, 23°C/50%RH	1.2	%	ISO 62

Mechanical properties	Value	Unit	Test Standard
Tensile modulus	1.52E6/870228	psi	ISO 527-1, -2
Tensile stress at break, 5mm/min	20300/12300	psi	ISO 527-1, -2
Tensile strain at break, 5mm/min	3/7	%	ISO 527-1, -2
Charpy impact strength, 23°C	30.9/>60	ft-lb/in <sup>2</sup>	ISO 179/1eU
Charpy impact strength, -30°C	21.4/28.5	ft-lb/in <sup>2</sup>	ISO 179/1eU
Charpy notched impact strength, 23°C	4.52/7.61	ft-lb/in <sup>2</sup>	ISO 179/1eA
Charpy notched impact strength, -30°C	3.57/4.04	ft-lb/in <sup>2</sup>	ISO 179/1eA

Thermal properties	Value	Unit	Test Standard
Melting temperature, 20°C/min	428	°F	ISO 11357-1/-3
DTUL at 1.8 MPa	374	°F	ISO 75-1, -2
DTUL at 0.45 MPa	410	°F	ISO 75-1, -2
Vicat softening temperature, 50°C/h 10N	410	°F	ISO 306
FMVSS	SE	-	ISO 3795 (FMVSS 302)
Flammability @3.2mm nom. thickn.	V-0	class	UL 94
Flammability @1.6mm nom. thickn.	V-0	class	UL 94
Flammability @0.8mm nom. thickn.	V-0	class	UL 94
Flammability @0.4mm nom. thickn.	V-0	class	UL 94
Continuous service temperature	130	°C	DIN/IEC 60216-1
Glow wire flammability index, 0.8 mm	1760	°F	IEC 60695-2-12
Glow wire flammability index, 3.2 mm	1760	°F	IEC 60695-2-12
Ball pressure test	347	°F	IEC 60695-10-2


Electrical properties	Value	Unit	Test Standard
Volume resistivity, 23°C	>1E13/-	Ohm*m	IEC 62631-3-1
Surface resistivity, 23°C	>1E13/-	Ohm	IEC 62631-3-2
Comparative tracking index	PLC 0/-	-	UL 746
Comparative tracking index	Group I	-	IEC 60112
CTI 50 drops	600	V	IEC 60112
CTI 100 drops	600	V	IEC 60112

VDA Properties	Value	Unit	Test Standard
FMVSS	SE		ISO 3795 (FMVSS 302)


**FRIANYL® DEV B3 GF30 X V0 - PA6**

**Diagrams**


**Stress-strain (dry)**

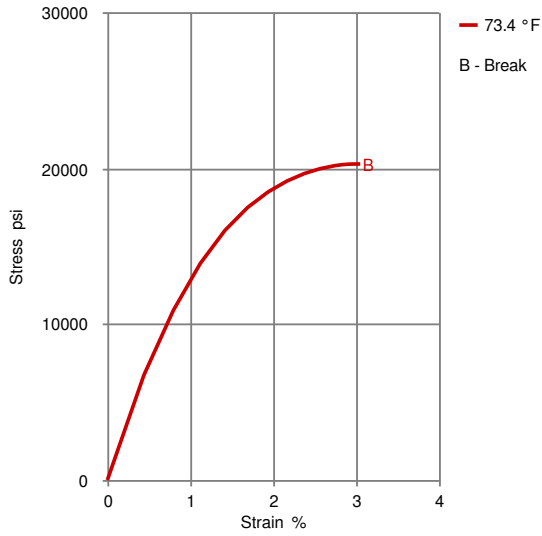


**Stress-strain (cond.)**

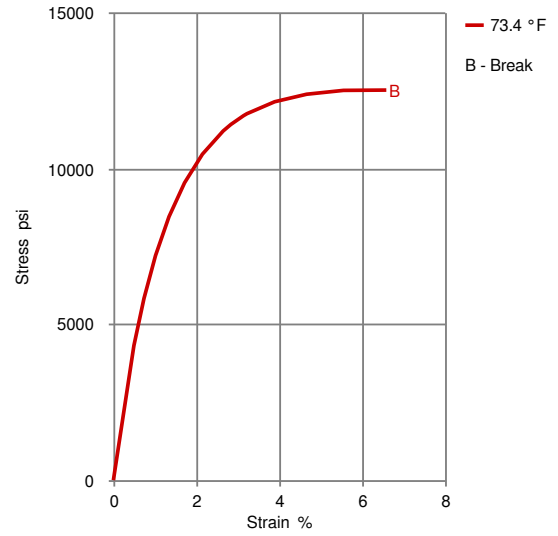

**Secant modulus-strain (dry)**

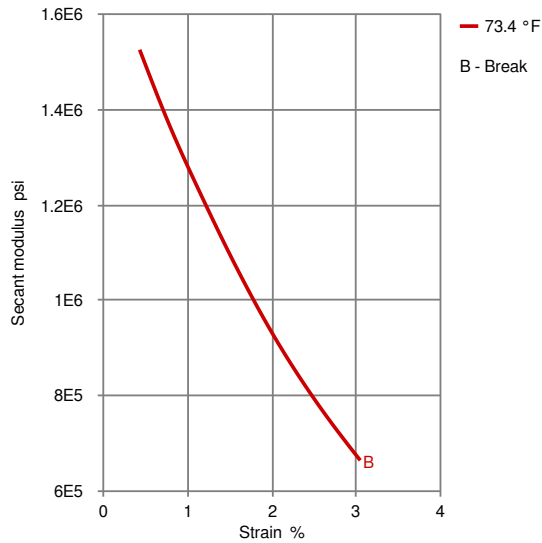



**Secant modulus-strain (cond.)**

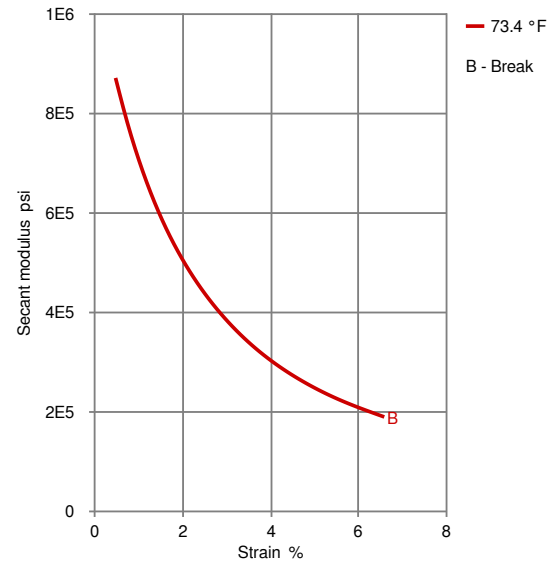

**FRIANYL® DEV B3 GF30 X V0 - PA6**



**True Stress-strain (dry)**

**True Stress-strain (cond.)**

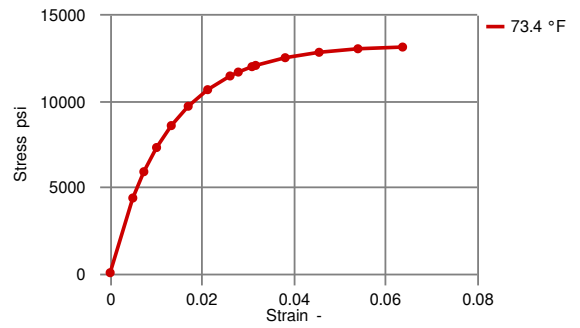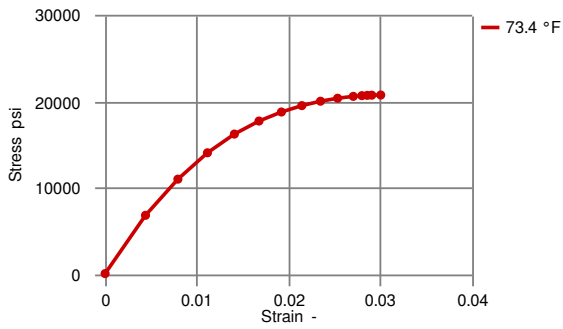


**LTHA-Stress at Break Retention 0.16in**

**LTHA-Strain at Break Retention 0.16in**

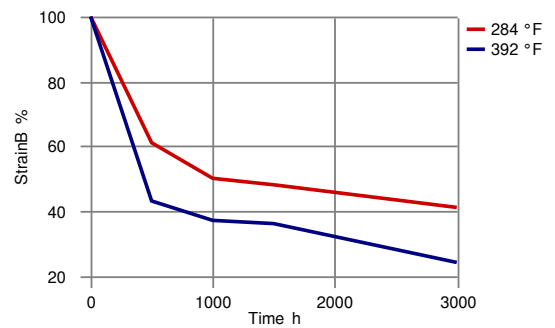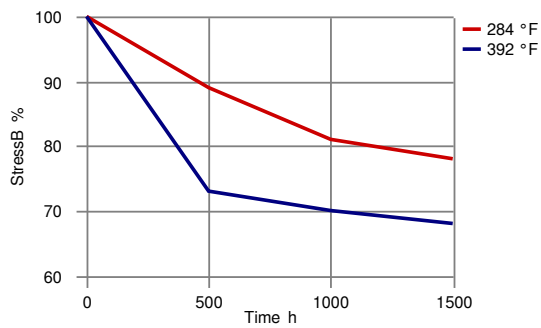

**FRIANYL® DEV B3 GF30 X V0 - PA6**

**LTHA-Charyp Notched Impact Strength Retention 0.16in**

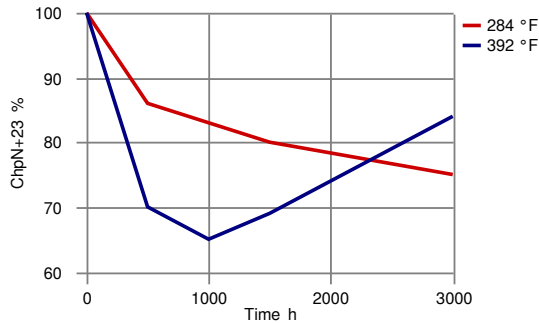

**Other text information**

**Injection Molding Preprocessing**

PA materials, stocked in a moisture-proof packaging, can be processed without drying; however, it is always recommended drying the product that comes from a large package (e.g. Octabin). The moisture content suggested for the injection moulding process should be lower than 0.15%, according to the grade and to the moulded part characteristics. The materials containing flame retardants should have moisture content below 0.10%. Red phosphorous containing grades must always be dried below 0.08%. The drying time depends on the moisture content and the drying conditions. Typically 4-8 hours at 80-90 °C using dehumidified air (dew point of -20 °C) are suitable conditions for a starting moisture content of 0.20%-0.40%.

**Injection molding**

The following conditions apply to a standard injection moulding process. Machine temperatures: barrel 265-290 °C (PA66), 235-270 °C (PA6), nozzle and hot runners up to 300 °C (up to 290 °C products with flame retardants). Mould temperatures: 60-80 °C, (80-100 °C highly reinforced grades). Back pressure: typically 5-10 bar (hydraulic pressure). Temperatures exceeding 300 °C and long residence time could lead to additives degradation and brittleness of the material. In case of gas generation in the melt, please verify moisture content and processing temperatures. Usage of regrind is possible depending on the moulded part characteristics. For further details, please refer to the document 'Instructions for injection moulding' or contact our technical support team.

**Injection Molding Postprocessing**

PA materials reach their final performance with a water content of about 1.5 to 3.5% by weight, depending on the type. This percentage corresponds to the point of equilibrium between the rates of absorption and desorption of moisture. After moulding, in favourable environmental conditions, a part can quickly absorb moisture up to 0.5-1.0%, while the equilibrium will be reached during its life. A conditioning treatment can accelerate further the initial water absorption of the moulded parts. Conditioning is usually carried out in hot and humid environment (for example 50 °C, 100% RH), inside climatic chambers. Slight dimensional variations (increase in volume due to the water absorbed) must be taken into account, especially in unfilled grades. Post-treatments of parts may also include the annealing (60-80 °C in oven, up to four hours). This procedure can be useful to relax any internal stresses.

**Characteristics**

<b>Special Characteristics</b>	Flame retardant, Heat resistant
<b>Product Categories</b>	Glass reinforced
<b>Processing</b>	Injection molding
<b>Delivery Form</b>	Granules
<b>Additives</b>	Flame retarding agent