

CELANYL[®] A3 H J20 BK 9005/2

CELANYL[®]

Toughened grade for outstanding impact resistance over a wide temperature range. Long term heat ageing resistance.

Product information

Resin Identification	PA66-I	ISO 1043
Part Marking Code	>PA66-I<	ISO 11469

Rheological properties

Moulding shrinkage range, parallel	1.4 - 1.8 %	ISO 294-4, 2577
Moulding shrinkage range, normal	1.4 - 1.8 %	ISO 294-4, 2577

Typical mechanical properties

	dry/cond.		
Tensile modulus	1900 / 750	MPa	ISO 527-1/-2
Tensile stress at yield, 50mm/min	48 / -	MPa	ISO 527-1/-2
Tensile strain at yield, 50mm/min	5.5 / -	%	ISO 527-1/-2
Tensile stress at break, 50mm/min	44 / 41	MPa	ISO 527-1/-2
Tensile strain at break, 50mm/min	35 / 200	%	ISO 527-1/-2
Flexural modulus	1900 / 670	MPa	ISO 178
Flexural strength	68 / 26	MPa	ISO 178
Charpy impact strength, 23°C	180 / N	kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	80 / 120	kJ/m ²	ISO 179/1eA
Poisson's ratio	0.41 / 0.46 ^[C]		

[C]: Calculated

Thermal properties

	dry/cond.		
Melting temperature, 10°C/min	265 / *	°C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	60 / *	°C	ISO 75-1/-2

Flammability

FMVSS Class	B	ISO 3795 (FMVSS 302)
-------------	---	----------------------

Physical/Other properties

	dry/cond.		
Humidity absorption, 2mm	1.8 / *	%	Sim. to ISO 62
Water absorption, 2mm	6.5 / *	%	Sim. to ISO 62
Density	1070 / -	kg/m ³	ISO 1183

Injection

Drying Recommended	yes
Drying Temperature	80 °C
Drying Time, Dehumidified Dryer	2 - 4 h
Processing Moisture Content	≤0.15 %
Melt Temperature Optimum	290 °C
Min. melt temperature	280 °C
Max. melt temperature	300 °C
Screw tangential speed	≤0.3 m/s
Mold Temperature Optimum	80 °C
Min. mould temperature	50 °C

CELANYL® A3 H J20 BK 9005/2

CELANYL®

Max. mould temperature 100 °C

Characteristics

Processing	Injection Moulding
Delivery form	Granules
Special characteristics	High impact or impact modified, Heat stabilised or stable to heat


Automotive

OEM	STANDARD	ADDITIONAL INFORMATION
VW Group	VW 50127	*Best Fitting Grade To PA66-3, Not Officially Approved

CELANYL® A3 H J20 BK 9005/2

CELANYL®


Stress-strain (dry)

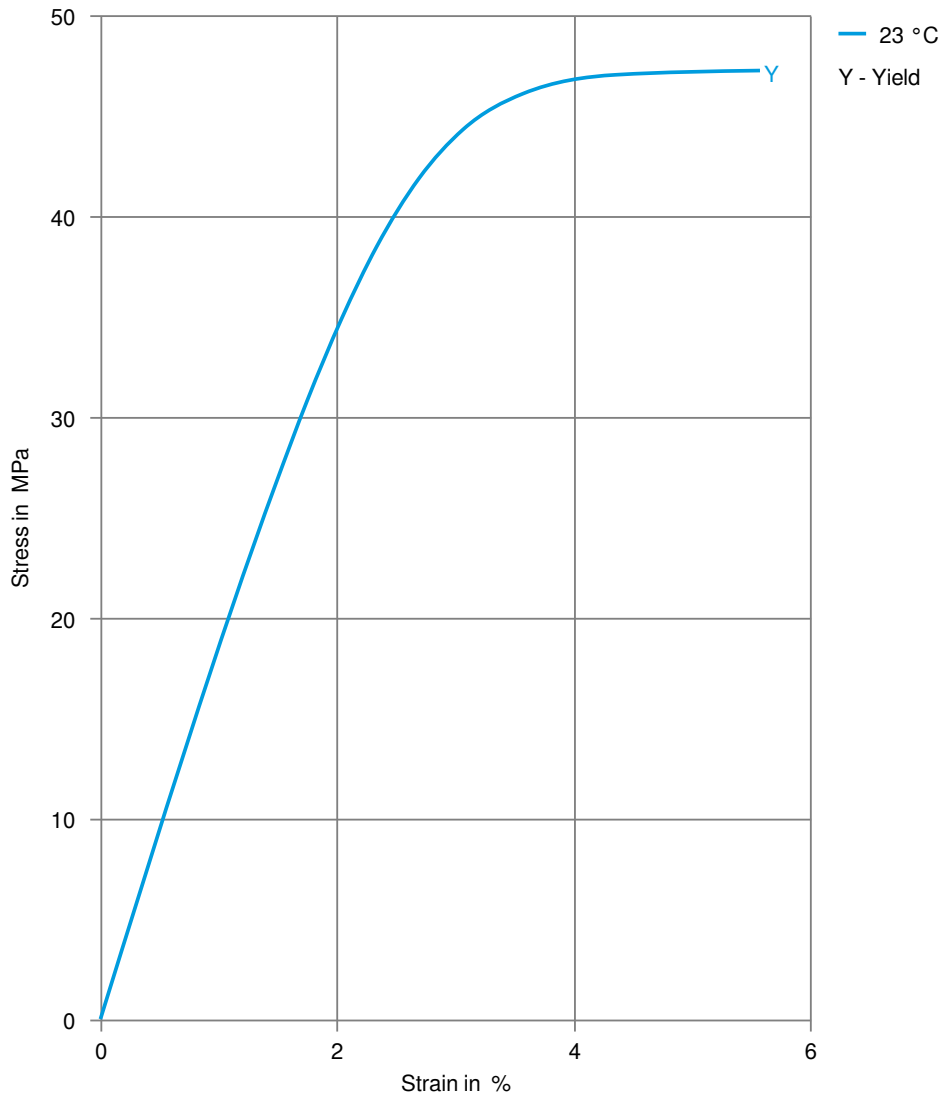

CELANYL® A3 H J20 BK 9005/2

CELANYL®


Stress-strain (cond.)

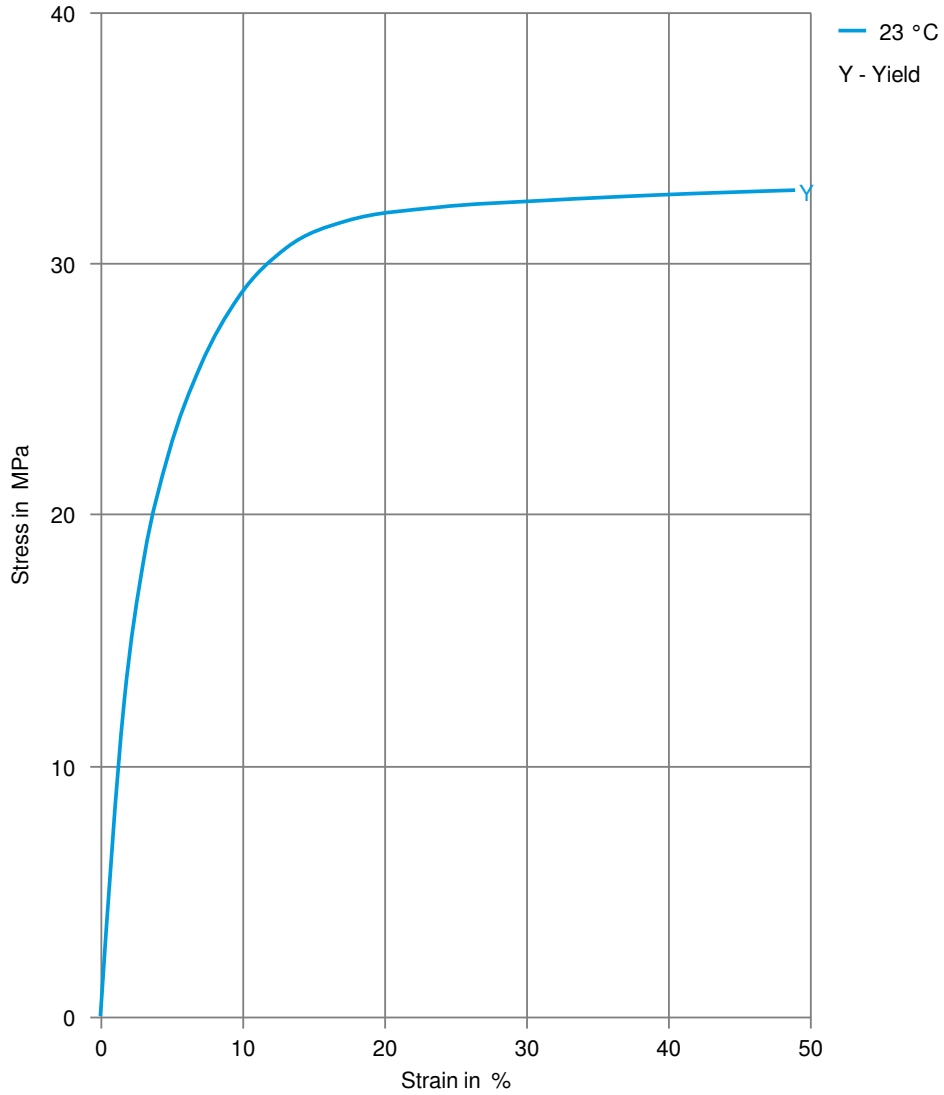

CELANYL® A3 H J20 BK 9005/2

CELANYL®


Secant modulus-strain (dry)

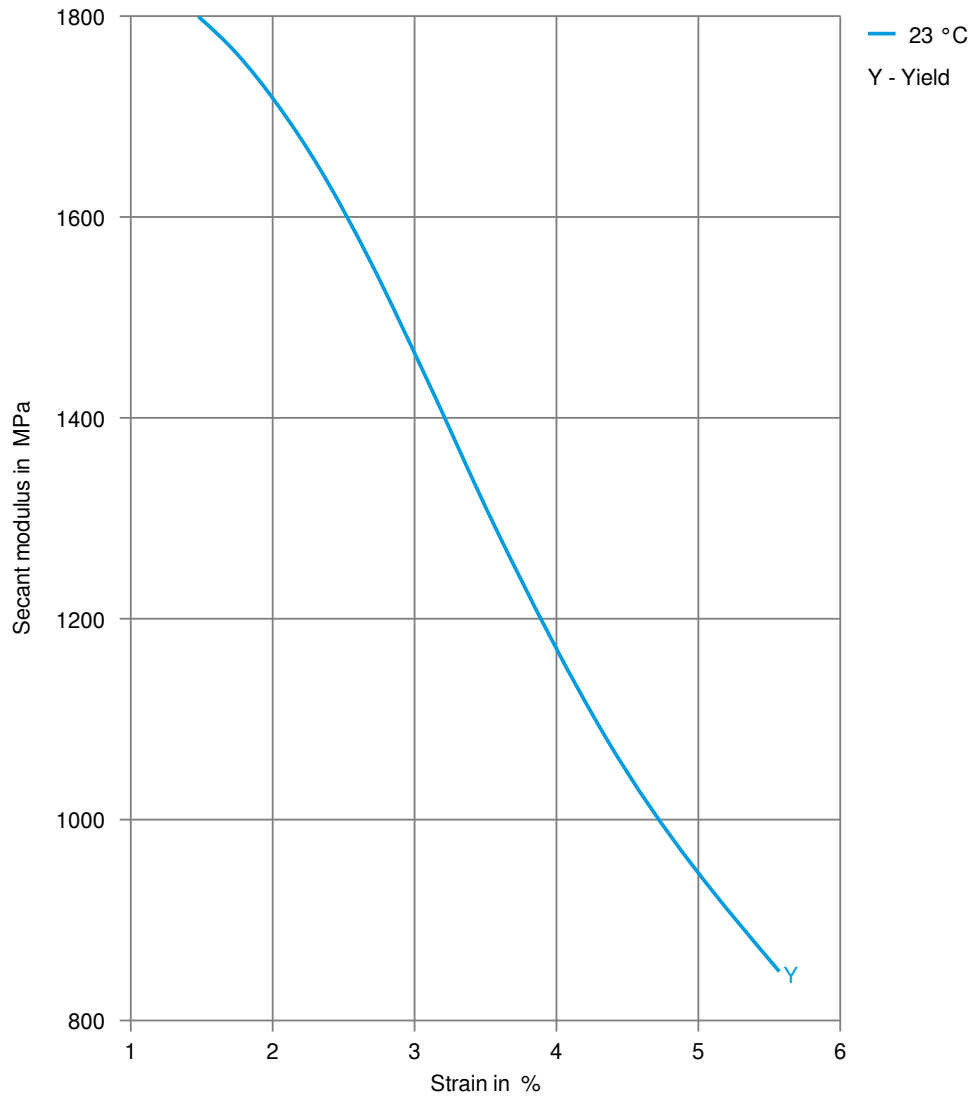

CELANYL® A3 H J20 BK 9005/2

CELANYL®


Secant modulus-strain (cond.)

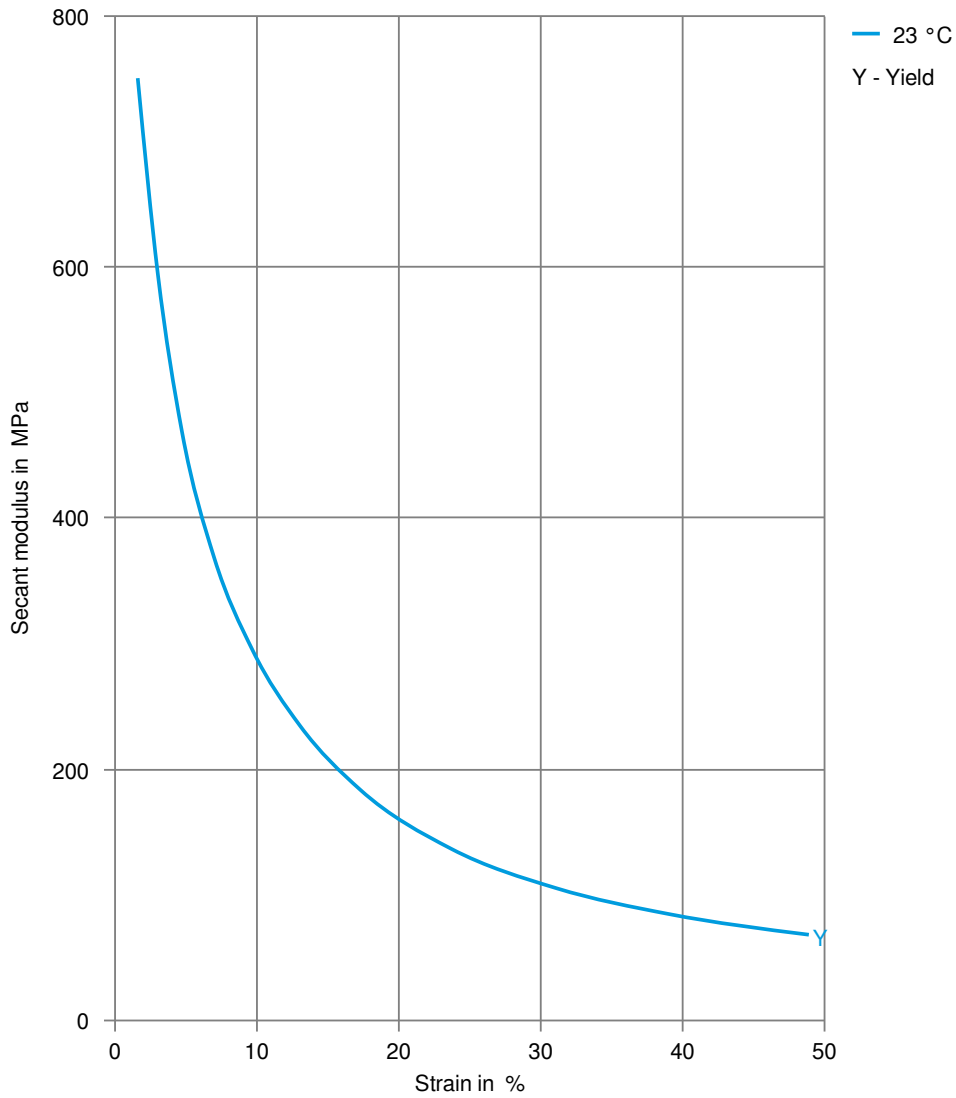

CELANYL® A3 H J20 BK 9005/2

CELANYL®


Stress-strain, 50mm/min (dry)

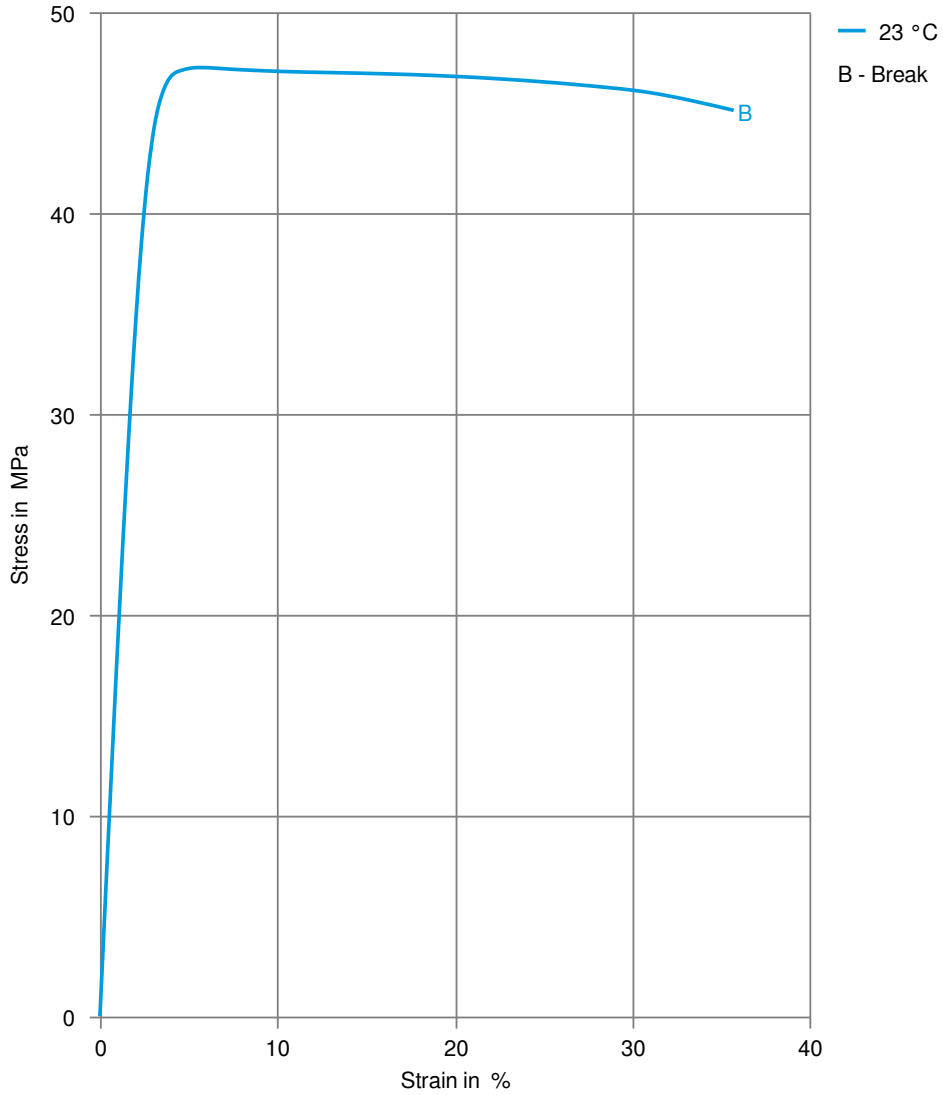

CELANYL® A3 H J20 BK 9005/2

CELANYL®


Stress-strain, 50mm/min (cond.)

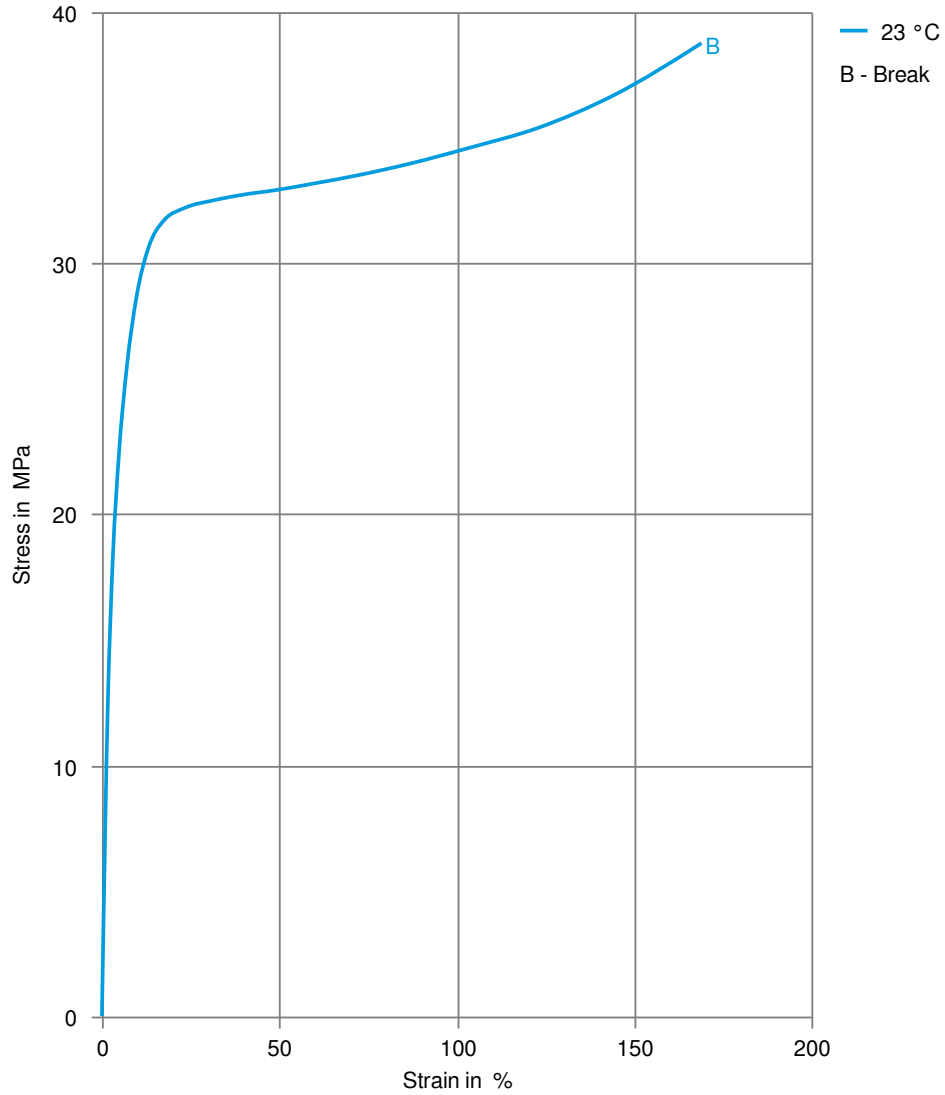

CELANYL® A3 H J20 BK 9005/2

CELANYL®

Secant modulus-strain, 50mm/min (dry)

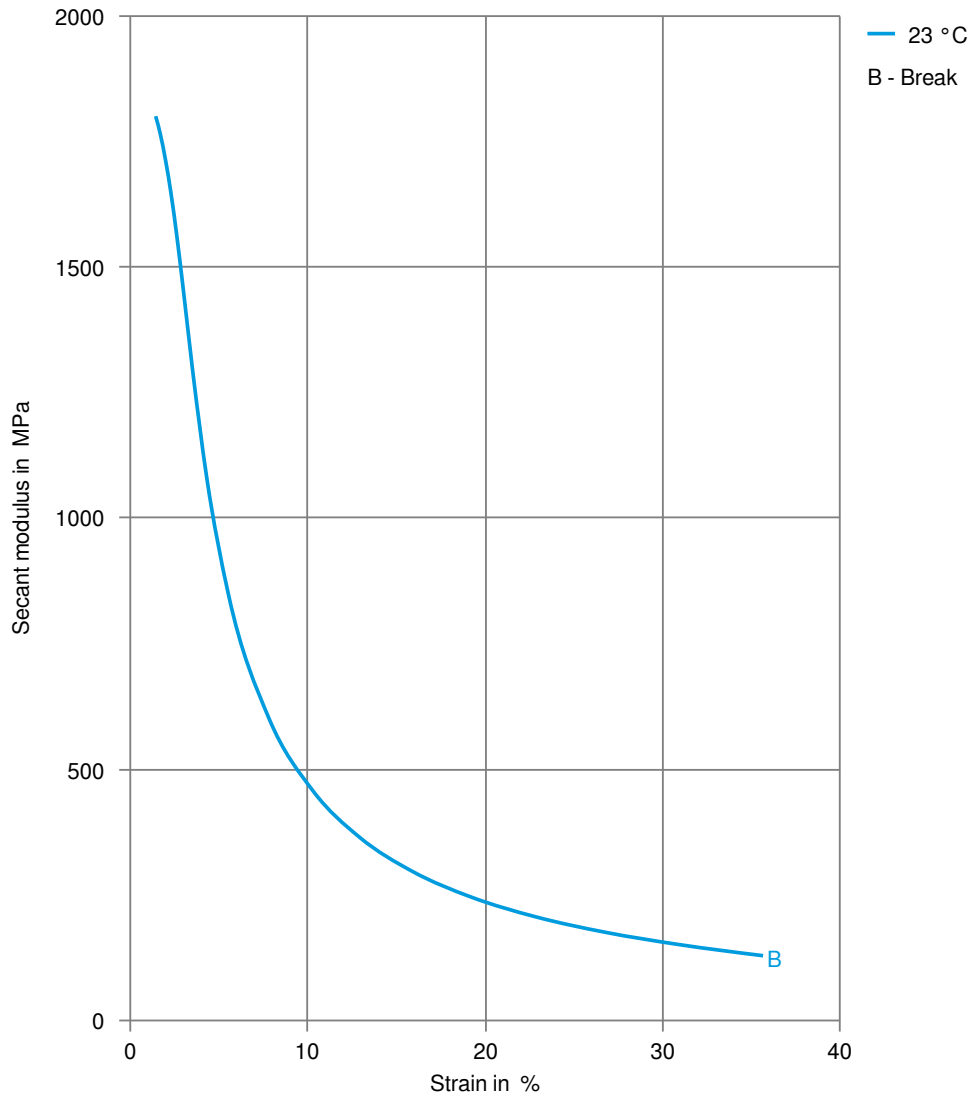

CELANYL® A3 H J20 BK 9005/2

CELANYL®

Secant modulus-strain, 50mm/min (cond.)

