

CELSTRAN® PP-GF40-0414 P7 (PRELIMINARY)

CELSTRAN® Long Fibre

Material code according to ISO 1043-1: PP Heat stabilized polypropylene reinforced with 40 weight percent long glass fibers. Natural. The fibers are chemically coupled to the polypropylene matrix. The pellets are cylindrical and normally as well as the embedded fibers 7 mm long. Parts molded of CELSTRAN have outstanding mechanical properties such as high strength and stiffness combined with high heat deflection. The notched impact strength is increased at elevated and low temperatures due to the fiber skeleton built in the parts. The long fiber reinforcement reduces creep significantly. The very isotropic shrinkage in the molded parts minimizes the warpage. Complex parts can be manufactured with high reproducibility by injection molding. Application field: Functional/structural parts for automotive

Product information

Resin Identification	PP-LGF40	ISO 1043
Part Marking Code	>PP-LGF40<	ISO 11469

Typical mechanical properties

Tensile modulus	9100 MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	135 MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	2.3 %	ISO 527-1/-2
Flexural modulus	9300 MPa	ISO 178
Flexural strength	220 MPa	ISO 178
Charpy impact strength, 23°C	70 kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	50 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	30 kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	35 kJ/m ²	ISO 179/1eA
Poisson's ratio	0.34 ^[C]	

[C]: Calculated

Thermal properties

Melting temperature, 10°C/min	166 °C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	158 °C	ISO 75-1/-2
Temperature of deflection under load, 8 MPa	134 °C	ISO 75-1/-2

Physical/Other properties

Density	1230 kg/m ³	ISO 1183
Bulk density	600 kg/m ³	ISO 60

Injection

Back pressure	3 MPa
---------------	-------

Characteristics

Delivery form	Pellets
---------------	---------

Additional information

Processing Notes


Pre-Drying

It is normally not necessary to dry CELSTRAN PP

CELSTRAN® PP-GF40-0414 P7 (PRELIMINARY)

CELSTRAN® Long Fibre

Stress-strain

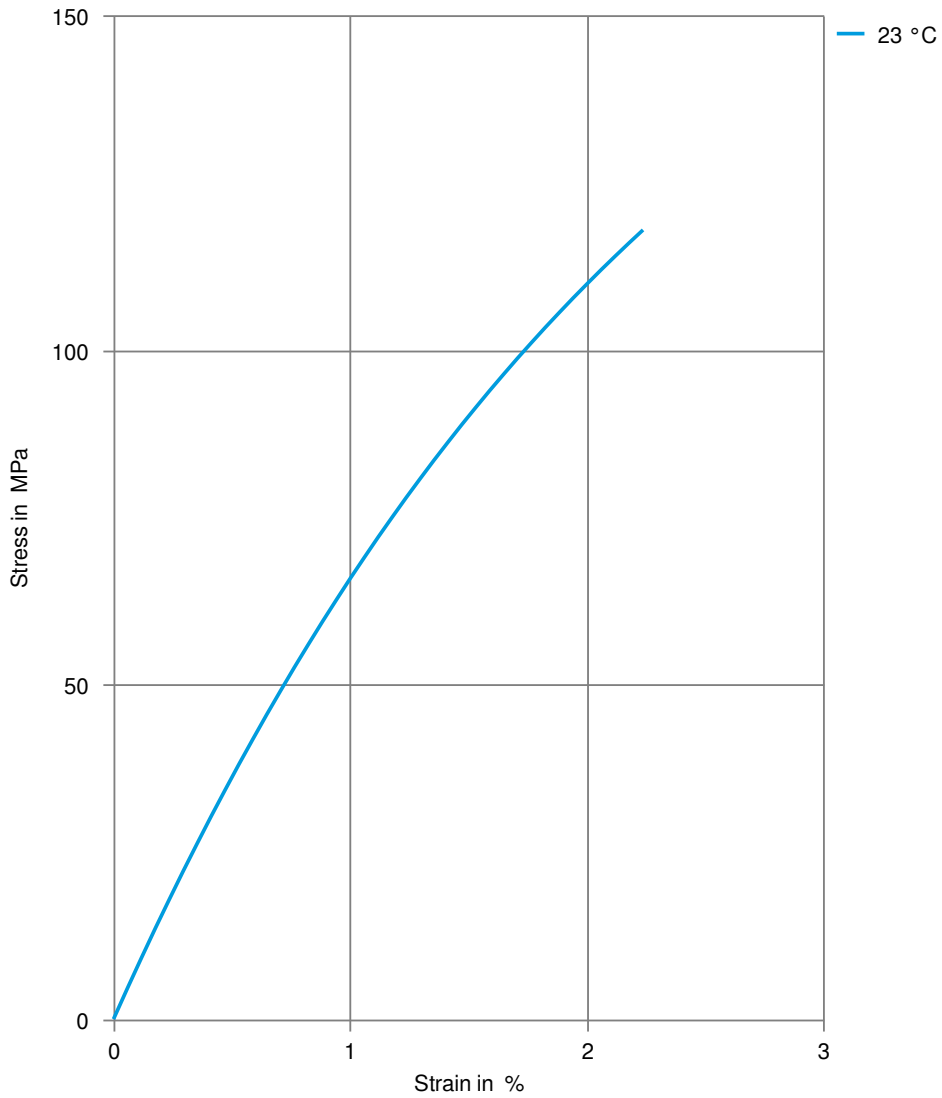

CELSTRAN® PP-GF40-0414 P7 (PRELIMINARY)

CELSTRAN® Long Fibre

Secant modulus-strain

