

CELSTRAN® PP-GF40-0455 ECO-B352SOUL 4PK BLK

CELSTRAN® Long Fibre

Material code according to ISO 1043-1: PP UV-stabilized polypropylene reinforced with 40 weight percent long glass fibers, low emission. The fibers are chemically coupled to the polypropylene matrix. The pellets are cylindrical and normally as well as the embedded fibers 10 mm long. Parts molded of CELSTRAN have outstanding mechanical properties such as high strength and stiffness combined with high heat deflection. The notched impact strength is increased at elevated and low temperatures due to the fiber skeleton built in the parts. The long fiber reinforcement reduces creep significantly. The very isotropic shrinkage in the molded parts minimizes the warpage. Complex parts can be manufactured with high reproducibility by injection molding. Application field: Functional/structural parts for automotive.

ECO-B: Celstran ECO-B is a long-glass-fiber reinforced homo-/co-polymer with the same properties and performance as the standard grades but produced with sustainability in mind. Using a mass-balance approach, biogenic feedstocks are used to offset the use of fossil-based raw materials and decrease greenhouse gas emissions. This process will be audited and certified according to the ISCC Plus mass-balance approach.

Product information

Resin Identification	PP-LGF40	ISO 1043
Part Marking Code	>PP-LGF40<	ISO 11469

Typical mechanical properties

Tensile modulus	9000 MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	120 MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	2 %	ISO 527-1/-2
Flexural modulus	8400 MPa	ISO 178
Flexural strength	200 MPa	ISO 178
Charpy impact strength, 23°C	60 kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	55 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	30 kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	31 kJ/m ²	ISO 179/1eA
Poisson's ratio	0.35	

Thermal properties

Melting temperature, 10°C/min	165 °C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	160 °C	ISO 75-1/-2
Temperature of deflection under load, 0.45 MPa	162 °C	ISO 75-1/-2
Temperature of deflection under load, 8 MPa	135 °C	ISO 75-1/-2

Flammability

Burning rate, Thickness 1 mm	24 mm/min	ISO 3795 (FMVSS 302)
------------------------------	-----------	----------------------

Physical/Other properties

Density	1220 kg/m ³	ISO 1183
---------	------------------------	----------

VDA Properties

Emission of organic compounds	30 µgC/g	VDA 277
Odour	3.5 class	VDA 270

CELSTRAN® PP-GF40-0455 ECO-B352SOUL 4PK BLK

CELSTRAN® Long Fibre

Injection

Drying Temperature	100 °C
Drying Time, Dehumidified Dryer	2 h
Processing Moisture Content	≤0.2 %
Screw tangential speed	≤0.0982 m/s
Min. mould temperature	30 °C
Max. mould temperature	70 °C
Hold pressure range	40 - 80 MPa
Back pressure	3 MPa

Characteristics

Processing	Injection Moulding, Extrusion, Sheet Extrusion, Other Extrusion, Transfer Moulding
Delivery form	Pellets
Special characteristics	Light stabilised or stable to light, U.V. stabilised or stable to weather, Heat stabilised or stable to heat, Low emissions
Sustainability	Bio-Content

Additional information


Processing Notes

Pre-Drying

It is normally not necessary to dry CELSTRAN PP

CELSTRAN® PP-GF40-0455 ECO-B352SOUL 4PK BLK
CELSTRAN® Long Fibre

Stress-strain

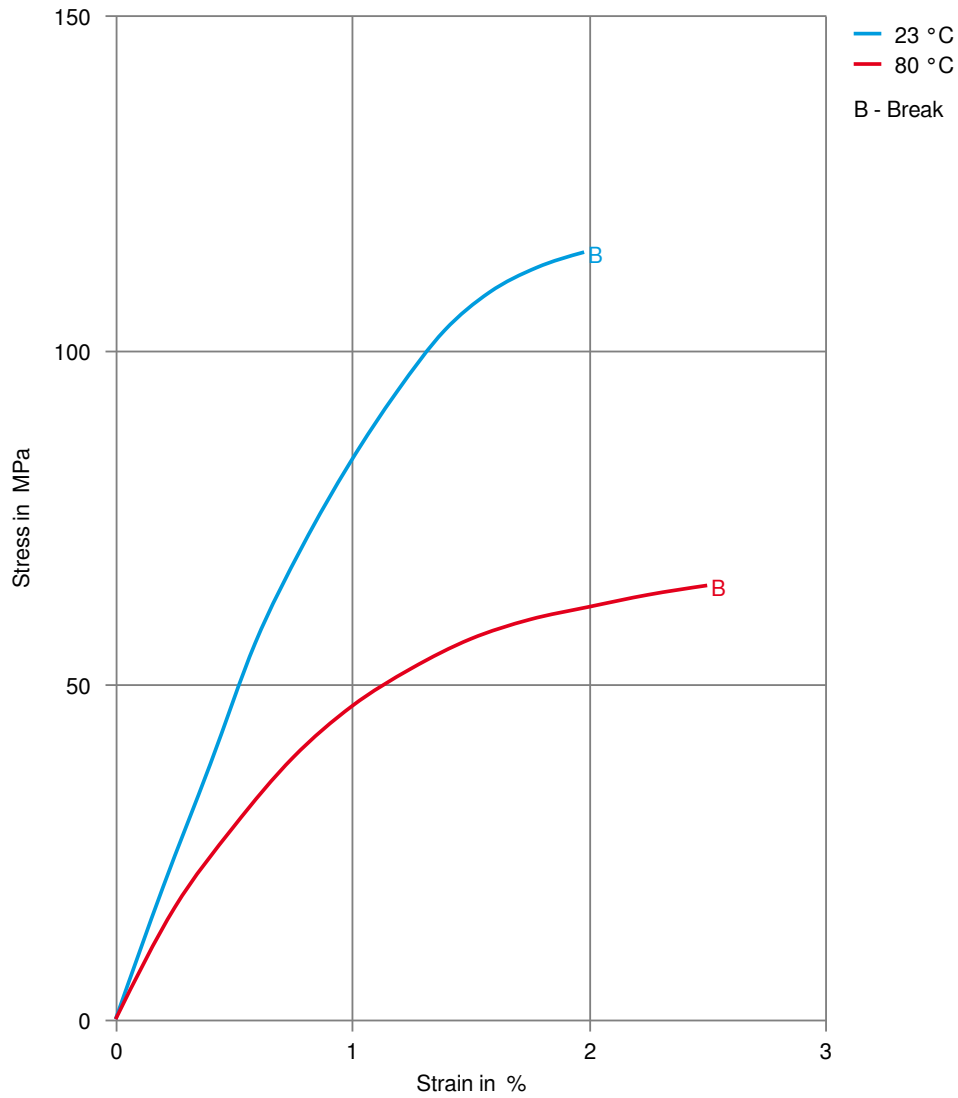

CELSTRAN® PP-GF40-0455 ECO-B352SOUL 4PK BLK
CELSTRAN® Long Fibre

Secant modulus-strain

