

TECNOPRENE® 3K4ELU1

TECNOPRENE®

Elastomer modified polypropylene copolymer, 20% glass fiber reinforced, chemically coupled, high UV resistance

Product information

Resin Identification	PP-GF20	ISO 1043
Part Marking Code	>PP-GF20<	ISO 11469

Rheological properties

Melt mass-flow rate	2 g/10min	ISO 1133
Melt mass-flow rate, Temperature	230 °C	
Melt mass-flow rate, Load	2.16 kg	

Typical mechanical properties

Tensile modulus	3300 MPa	ISO 527-1/-2
Tensile stress at yield, 50mm/min	45 MPa	ISO 527-1/-2
Tensile strain at yield, 50mm/min	5.5 %	ISO 527-1/-2
Flexural modulus	2900 MPa	ISO 178
Flexural strength	62 MPa	ISO 178
Charpy impact strength, 23°C	68 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	26 kJ/m ²	ISO 179/1eA
Poisson's ratio	0.37 ^[C]	

[C]: Calculated

Thermal properties

Temperature of deflection under load, 1.8 MPa	100 °C	ISO 75-1/-2
---	--------	-------------

Flammability

Burning Behav. at 1.5mm nom. thickn.	HB class	IEC 60695-11-10
Burning Behav. at thickness h	HB class	IEC 60695-11-10
Thickness tested	3.2 mm	IEC 60695-11-10
FMVSS Class	B	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	77.4 mm/min	ISO 3795 (FMVSS 302)

Physical/Other properties

Density	1040 kg/m ³	ISO 1183
---------	------------------------	----------

Characteristics

Processing	Injection Moulding
Special characteristics	High impact or impact modified, U.V. stabilised or stable to weather

Additional information

Processing Notes

Storage

This product should be stored in a covered facility and kept away from moisture and heat.

TECNOPRENE® 3K4ELU1

TECNOPRENE®


Automotive

OEM
Bosch

STANDARD
N28 BN10-X003

ADDITIONAL INFORMATION
Black

Stress-strain

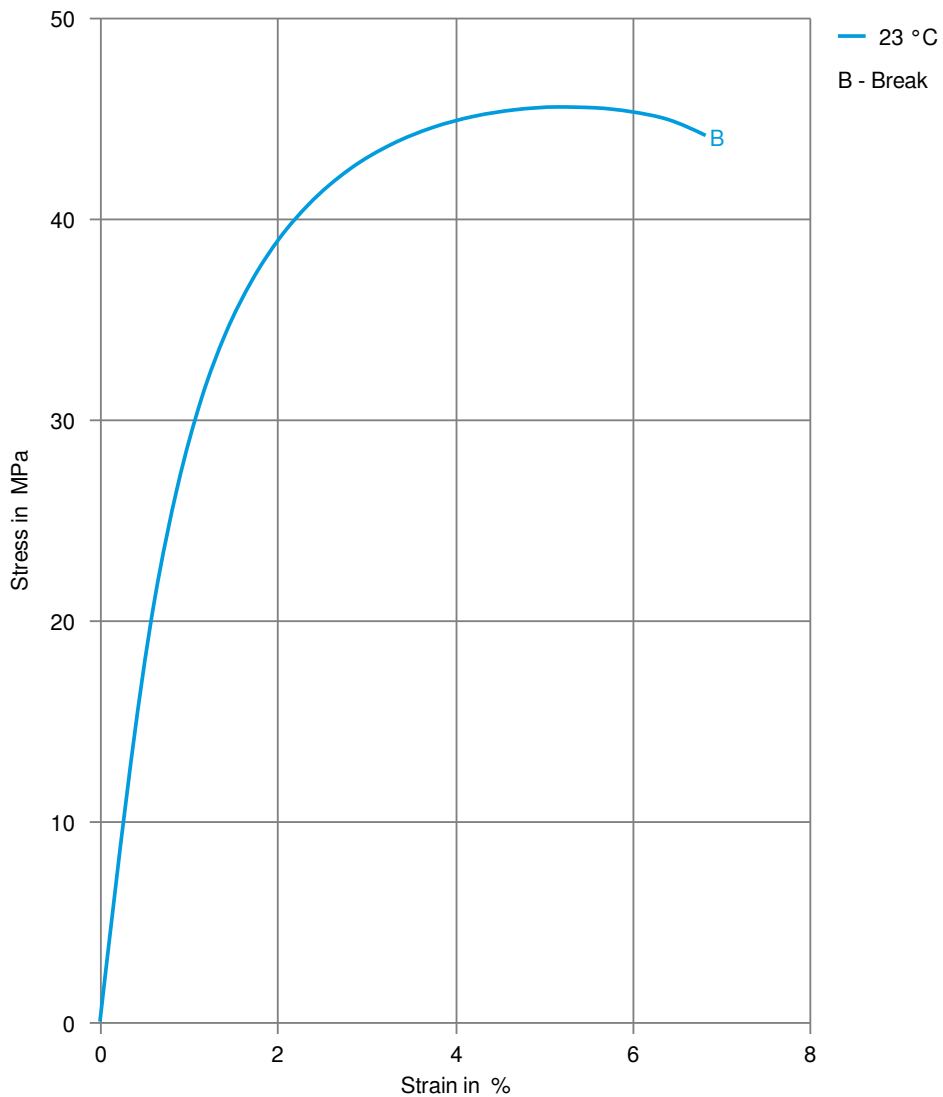

TECNOPRENE® 3K4ELU1

TECNOPRENE®

Secant modulus-strain

