

Hytrel® G4774

THERMOPLASTIC POLYESTER ELASTOMER

Common features of Hytrel® thermoplastic polyester elastomer include mechanical and physical properties such as exceptional toughness and resilience, high resistance to creep, impact and flex fatigue, flexibility at low temperatures and good retention of properties at elevated temperatures. In addition, it resists many industrial chemicals, oils and solvents. Special grades include heat stabilised, flame retardant, food contact compliant, blow molding and extrusion grades. Concentrates offered include black pigments, UV protection additives, heat stabilisers, and flame retardants. Hytrel® thermoplastic polyester elastomer is plasticiser free.

The good melt stability of Hytrel® thermoplastic polyester elastomer normally enables the recycling of properly handled production waste. If recycling is not possible, we recommend, as the preferred option, incineration with energy recovery (-24 kJ/g of base polymer) in appropriately equipped installations.

For disposal, local regulations have to be observed.

Hytrel® thermoplastic polyester elastomer typically is used in demanding applications in the automotive, fluid power, electrical/electronic, consumer goods, appliance and power tool, sporting goods, furniture, industrial and off-road transportation/equipment industry.

Hytrel® G4774 is a medium modulus grade with nominal hardness of 47D. It contains discoloring stabilizer. It can be processed by many conventional thermoplastic processing techniques like injection molding and extrusion.

Typical applications:

Hose and tubing, wire and cable jackets, film and sheeting, profiles and moulded products. Not suited for light-colored finished products.

Product information

Resin Identification	TPC-ET	ISO 1043
Part Marking Code	>TPC-ET<	ISO 11469

Rheological properties

Melt volume-flow rate	11 cm ³ /10min	ISO 1133
Temperature	230 °C	
Load	2.16 kg	
Melt mass-flow rate	11 g/10min	ISO 1133
Melt mass-flow rate, Temperature	230 °C	
Melt mass-flow rate, Load	2.16 kg	
Moulding shrinkage, parallel	1.5 %	ISO 294-4, 2577
Moulding shrinkage, normal	1.2 %	ISO 294-4, 2577

Typical mechanical properties

Tensile modulus	110 MPa	ISO 527-1/-2
Stress at 10% strain	7 MPa	ISO 527-1/-2
Tensile stress at 50% strain, 1BA	12 MPa	ISO 527-1/-2
Tensile stress at break	17 MPa	ISO 527-1/-2
Nominal strain at break	400 %	ISO 527-1/-2
Tensile strain at break	200 %	ISO 527-1/-2
Flexural modulus	111 MPa	ISO 178
Shear Modulus	39 MPa	ISO 6721
Charpy impact strength, 23°C	N kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	N kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	N kJ/m ²	ISO 179/1eA

Hytrel® G4774

THERMOPLASTIC POLYESTER ELASTOMER

Charpy notched impact strength, -30 °C	N kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -40 °C	120 kJ/m ²	ISO 179/1eA
Tensile notched impact strength, 23 °C	260 kJ/m ²	ISO 8256/1
Izod notched impact strength, 23 °C	N kJ/m ²	ISO 180/1A
Izod notched impact strength, -40 °C	N kJ/m ²	ISO 180/1A
Brittleness temperature	-66 °C	ISO 974
Shore D hardness, 15s	43	ISO 48-4 / ISO 868
Shore D hardness, max	48	ISO 868
Tear strength, parallel	100 kN/m	ISO 34-1
Tear strength, normal	90 kN/m	ISO 34-1
Abrasion resistance	33 mm ³	ISO 4649

Thermal properties

Melting temperature, 10 °C/min	208 °C	ISO 11357-1/-3
Glass transition temperature, 10 °C/min	-45 °C	ISO 11357-1/-3
Temperature of deflection under load, 0.45 MPa	60 °C	ISO 75-1/-2
Vicat softening temperature, 50 °C/h 10N	165 °C	ISO 306
Coefficient of linear thermal expansion (CLTE), parallel	220 E-6/K	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), normal	190 E-6/K	ISO 11359-1/-2
Thermal conductivity of melt	0.16 W/(m K)	ISO 22007-2
Effective thermal diffusivity, flow	5.44E-8 m ² /s	ISO 22007-4
Specific heat capacity of melt	2100 J/(kg K)	ISO 22007-4
RTI, electrical, 0.75mm	50 °C	UL 746B
RTI, electrical, 1.5mm	50 °C	UL 746B
RTI, electrical, 3.0mm	50 °C	UL 746B
RTI, impact, 0.75mm	50 °C	UL 746B
RTI, impact, 1.5mm	50 °C	UL 746B
RTI, impact, 3.0mm	50 °C	UL 746B
RTI, strength, 0.75mm	50 °C	UL 746B
RTI, strength, 1.5mm	50 °C	UL 746B
RTI, strength, 3.0mm	50 °C	UL 746B
TGA curve	available	ISO 11359-1/-2

Flammability

Burning Behav. at 1.5mm nom. thickn.	HB class	IEC 60695-11-10
Thickness tested	1.5 mm	IEC 60695-11-10
UL recognition	yes	UL 94
Burning Behav. at thickness h	HB class	IEC 60695-11-10
Thickness tested	3 mm	IEC 60695-11-10
UL recognition	yes	UL 94
Glow Wire Flammability Index, 2.0mm	700 °C	IEC 60695-2-12
Glow Wire Ignition Temperature, 2.0mm	675 °C	IEC 60695-2-13
Glow Wire Temperature, No Flame, 2mm	650 °C	IEC 60335-1
FMVSS Class	B	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	33 mm/min	ISO 3795 (FMVSS 302)

Hytrel® G4774

THERMOPLASTIC POLYESTER ELASTOMER

Electrical properties

Relative permittivity, 1MHz	4.7	IEC 62631-2-1
Volume resistivity	1E12 Ohm.m	IEC 62631-3-1
Comparative tracking index	600 ^[1]	IEC 60112
Comparative tracking index, 3.0mm	0 PLC	UL 746A

[1]: Thickness = 3.0mm

Physical/Other properties

Water absorption, Immersion 24h	2.5 %	Sim. to ISO 62
Density	1190 kg/m ³	ISO 1183
Density of melt	1010 kg/m ³	

VDA Properties

Emission of organic compounds	18 µgC/g	VDA 277
Odour	5 class	VDA 270

Injection

Drying Recommended	yes
Drying Temperature	100 °C
Drying Time, Dehumidified Dryer	2 - 3 h
Processing Moisture Content	≤0.08 %
Melt Temperature Optimum	240 °C
Min. melt temperature	235 °C
Max. melt temperature	260 °C
Mold Temperature Optimum	45 °C
Min. mould temperature	35 °C
Max. mould temperature	46 °C
Ejection temperature	129 °C

Extrusion

Drying Temperature	100 °C
Drying Time, Dehumidified Dryer	2 - 3 h
Processing Moisture Content	≤0.06 %
Melt Temperature Optimum	230 °C
Melt Temperature Range	225 - 240 °C

Characteristics

Processing	Injection Moulding, Film Extrusion, Extrusion, Sheet Extrusion, Other Extrusion, Casting, Thermoforming
Delivery form	Pellets
Special characteristics	Heat stabilised or stable to heat

Hytrel® G4774

THERMOPLASTIC POLYESTER ELASTOMER

Automotive

OEM

General Motors
Stellantis - Chrysler
Stellantis - Chrysler
VW Group


STANDARD

GMW17187P-TPC-ET-Type 3
MS-DB-448 / CPN-3098
MS-DB-448 / CPN-3355
TL 526 83 TPC-ET

ADDITIONAL INFORMATION

Black
Natural


Viscosity-shear rate

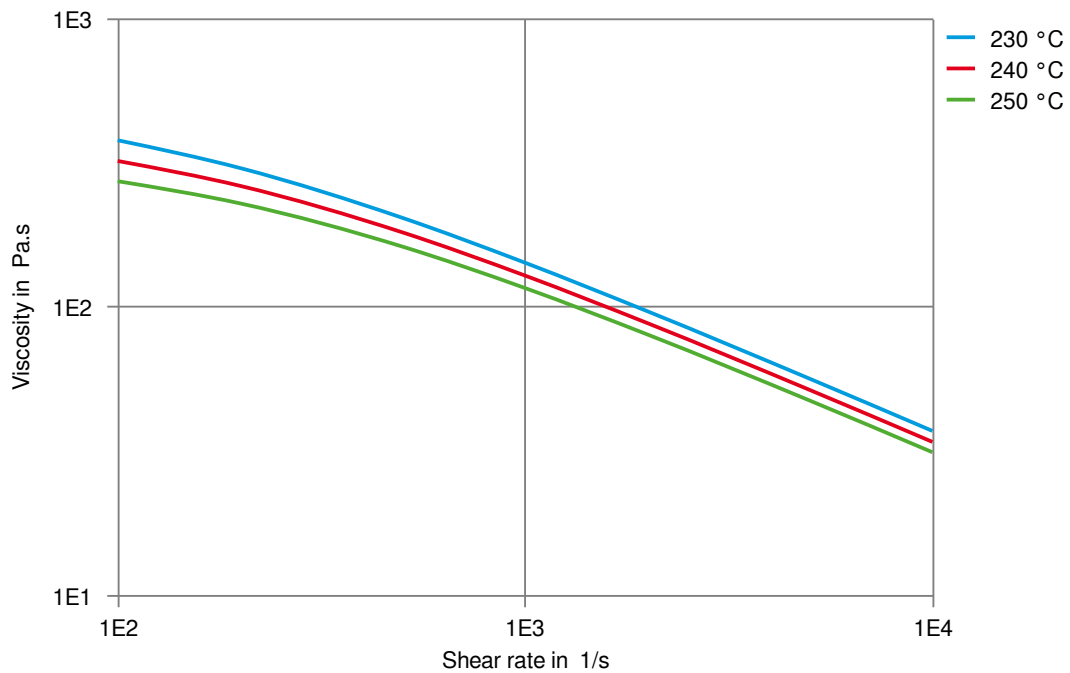

Hytrel® G4774

THERMOPLASTIC POLYESTER ELASTOMER


Shearstress-shear rate

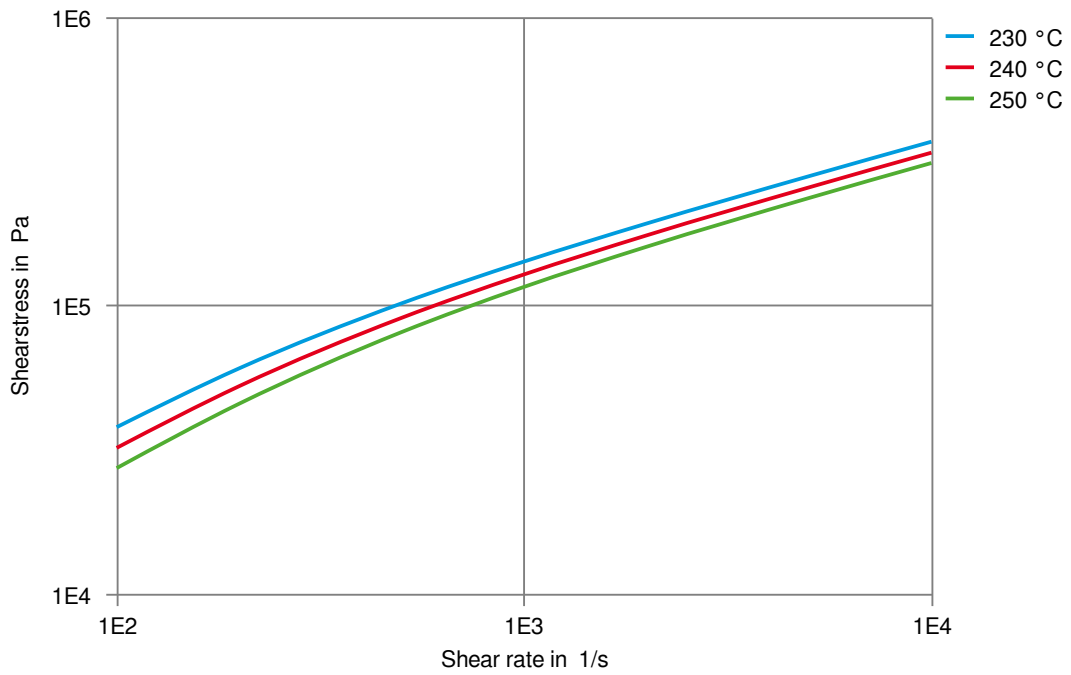

Hytrel® G4774

THERMOPLASTIC POLYESTER ELASTOMER


Dynamic Tensile modulus-temperature

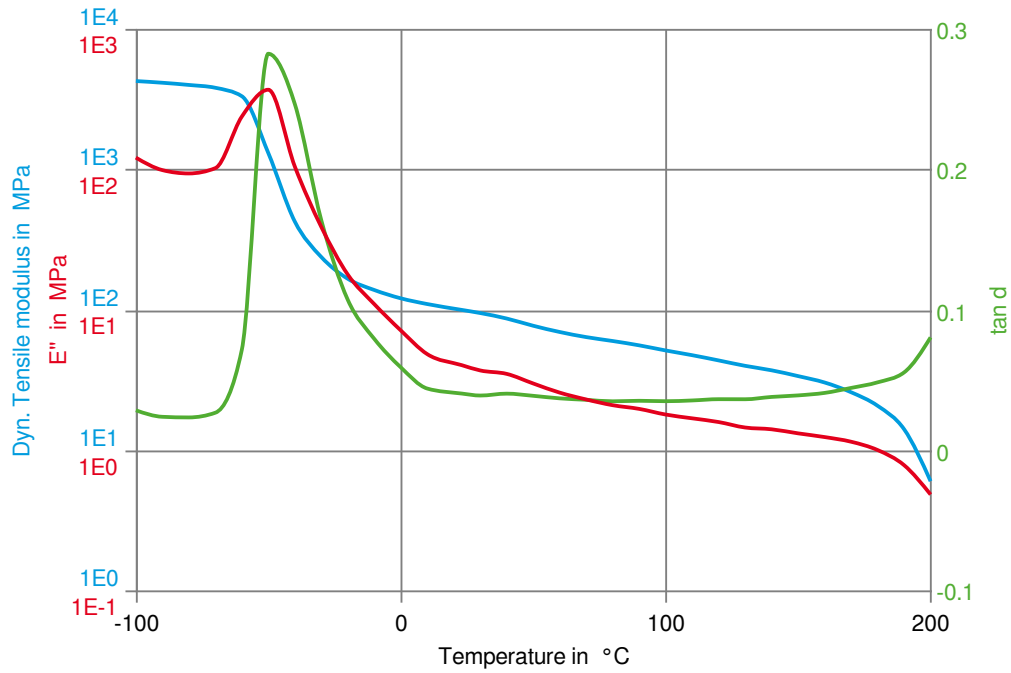

Hytrel® G4774

THERMOPLASTIC POLYESTER ELASTOMER


Stress-strain

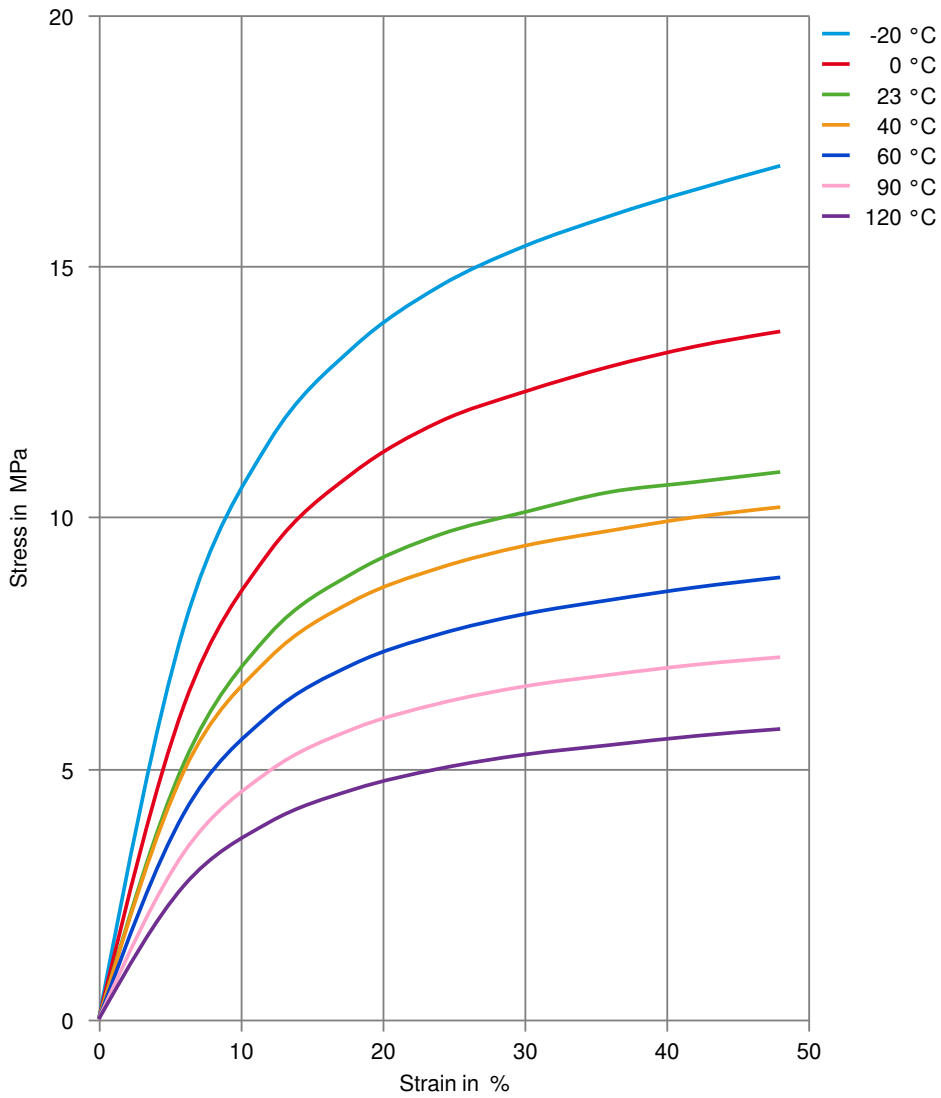

Hytrel® G4774

THERMOPLASTIC POLYESTER ELASTOMER


Secant modulus-strain

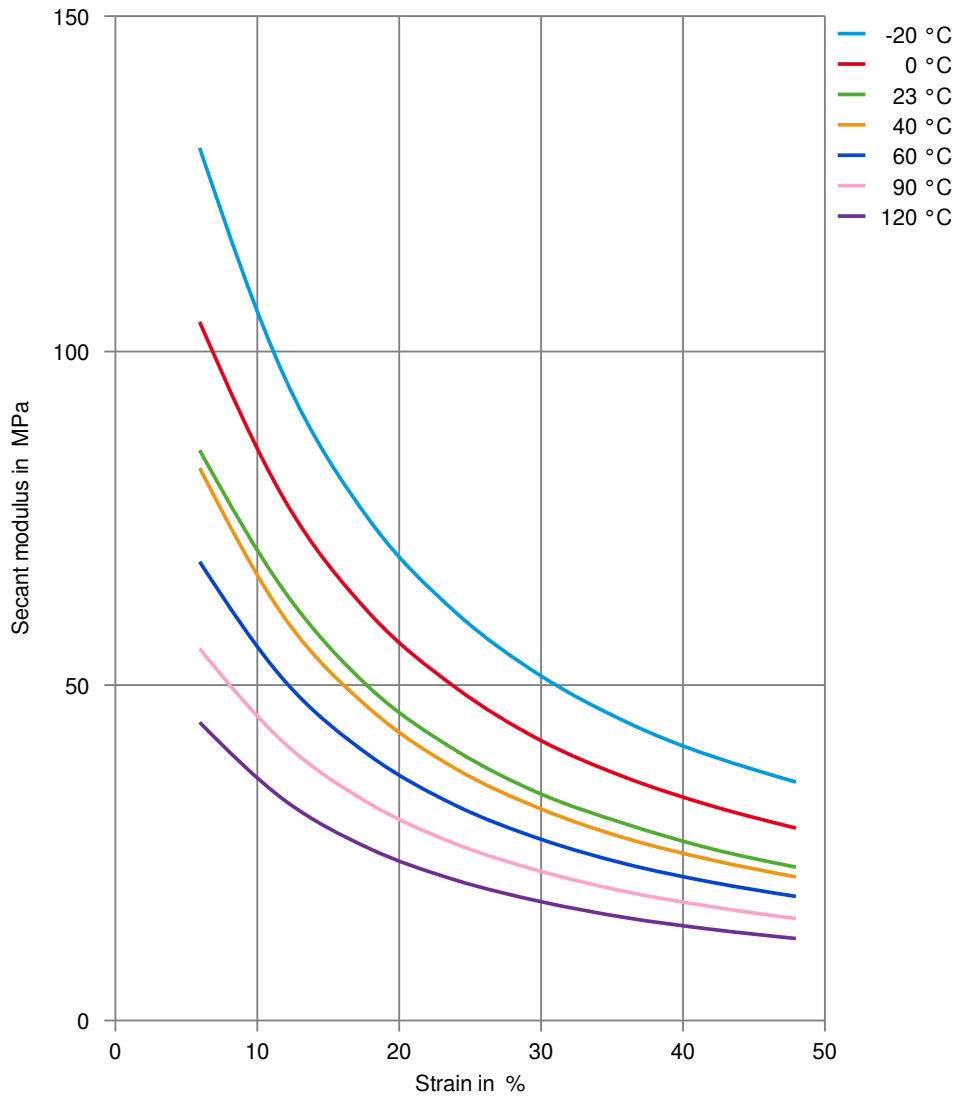

Hytrel® G4774

THERMOPLASTIC POLYESTER ELASTOMER

Stress-Strain (Flexible Materials)

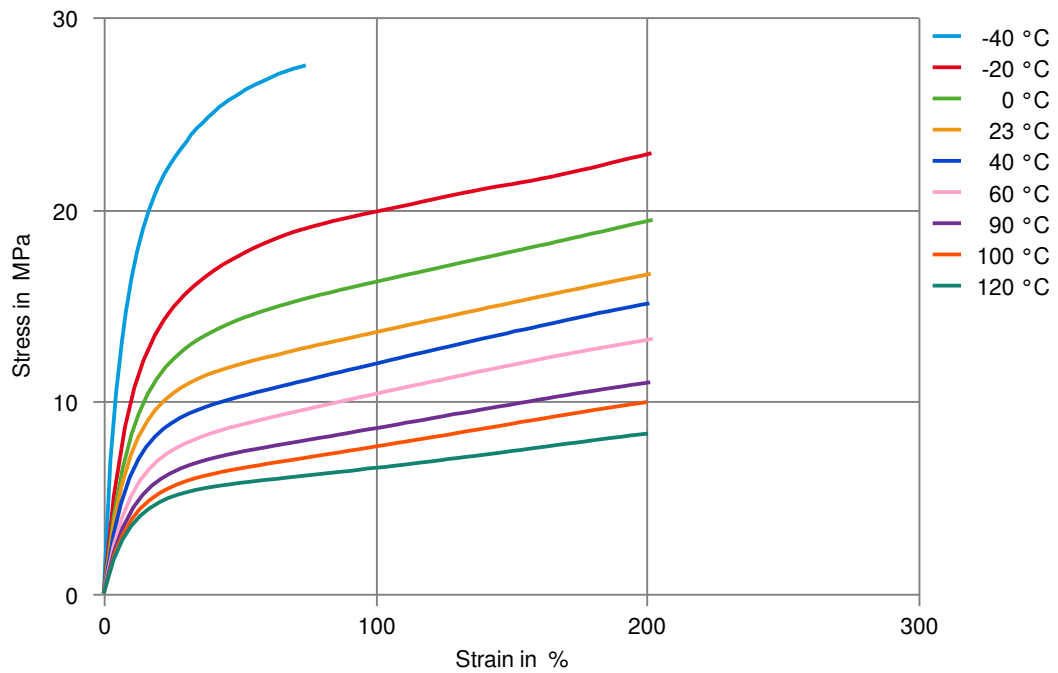

Hytrel® G4774

THERMOPLASTIC POLYESTER ELASTOMER

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass), 23°C
- ✓ Citric Acid solution (10% by mass), 23°C
- ✓ Lactic Acid (10% by mass), 23°C
- ✗ Hydrochloric Acid (36% by mass), 23°C
- ✗ Nitric Acid (40% by mass), 23°C
- ✗ Sulfuric Acid (38% by mass), 23°C
- ✓ Sulfuric Acid (5% by mass), 23°C
- ✗ Chromic Acid solution (40% by mass), 23°C

Bases

- ✗ Sodium Hydroxide solution (35% by mass), 23°C
- ✓ Sodium Hydroxide solution (1% by mass), 23°C
- ✓ Ammonium Hydroxide solution (10% by mass), 23°C

Alcohols

- ✓ Isopropyl alcohol, 23°C
- ✓ Methanol, 23°C
- ✗ Ethanol, 23°C

Hydrocarbons

- ✓ n-Hexane, 23°C
- ✓ Toluene, 23°C
- ✓ iso-Octane, 23°C

Ketones

- ✗ Acetone, 23°C

Ethers

- ✗ Diethyl ether, 23°C

Mineral oils

- ✓ SAE 10W40 multigrade motor oil, 23°C
- ✗ SAE 10W40 multigrade motor oil, 130°C
- ✗ SAE 80/90 hypoid-gear oil, 130°C
- ✓ Insulating Oil, 23°C
- ✗ Motor oil OS206 304 Ref.Eng.Oil, ISP, 135°C
- ✗ Automatic hypoid-gear oil Shell Donax TX, 135°C
- ✗ Hydraulic oil Pentosin CHF 202, 125°C

Standard Fuels

- ✗ ISO 1817 Liquid 1 - E5, 60°C
- ✗ ISO 1817 Liquid 2 - M15E4, 60°C
- ✗ ISO 1817 Liquid 3 - M3E7, 60°C
- ✗ ISO 1817 Liquid 4 - M15, 60°C
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C), 23°C
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 23°C
- ✓ Diesel fuel (pref. ISO 1817 Liquid F), 90°C
- ✗ Diesel fuel (pref. ISO 1817 Liquid F), >90°C

Hytrel® G4774

THERMOPLASTIC POLYESTER ELASTOMER

Salt solutions

- ✓ Sodium Chloride solution (10% by mass), 23 °C
- ✗ Sodium Hypochlorite solution (10% by mass), 23 °C
- ✓ Sodium Carbonate solution (20% by mass), 23 °C
- ✓ Sodium Carbonate solution (2% by mass), 23 °C
- ✓ Zinc Chloride solution (50% by mass), 23 °C

Other

- ✓ Ethyl Acetate, 23 °C
- ✗ Hydrogen peroxide, 23 °C
- ✗ DOT No. 4 Brake fluid, 130 °C
- ✗ Ethylene Glycol (50% by mass) in water, 108 °C
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water, 23 °C
- ✓ 50% Oleic acid + 50% Olive Oil, 23 °C
- ✓ Water, 23 °C
- ✗ Water, 90 °C
- ✓ Phenol solution (5% by mass), 23 °C

Symbols used:

- ✓ possibly resistant
Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).
- ✗ not recommended - see explanation
Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).